



This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.

SIDE VIEW

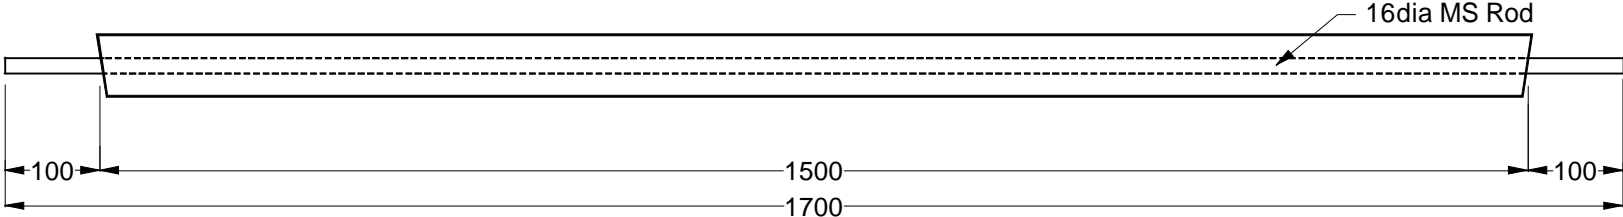

END VIEW



- Notes
- Anodes are cast to comply with CAA's standard casting tolerances
 - All sharp edges removed for safe handling
 - Steel inserts to comply with AS/NZS 3679.1 Grade 300. Unless specified otherwise

Chemical Composition Limits		Alloy:
Standard: AS2239 -2003*		Z1
Zinc		
Element	min	max
Cadmium	0.025	0.07
Aluminium	0.10	0.50
Silicon	-	0.005
Copper	-	0.005
Iron	-	0.005
Lead	-	0.006
Other Impurities		
- each	-	0.005
- total	-	0.02
Zinc	remainder	

* Corresponds to MIL-A-18001k alloy composition

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
42.3	45.0

Rev	Details of Change(s)	Date	Drawn	Verified
1	For manufacture	16OCT08	<i>BL</i>	<i>[Signature]</i>



cathodicanodes.com.au

All dimensions are in mm (nominal)

Product Zinc Anode		Scale 1 to 8
Part no. CDZ8-60S 45kg		Rev Sheet 1 1 of 1
Drawing no. CD1126		
Drawn by: BL	Date: 16OCT08	
Mould no. 5		