


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

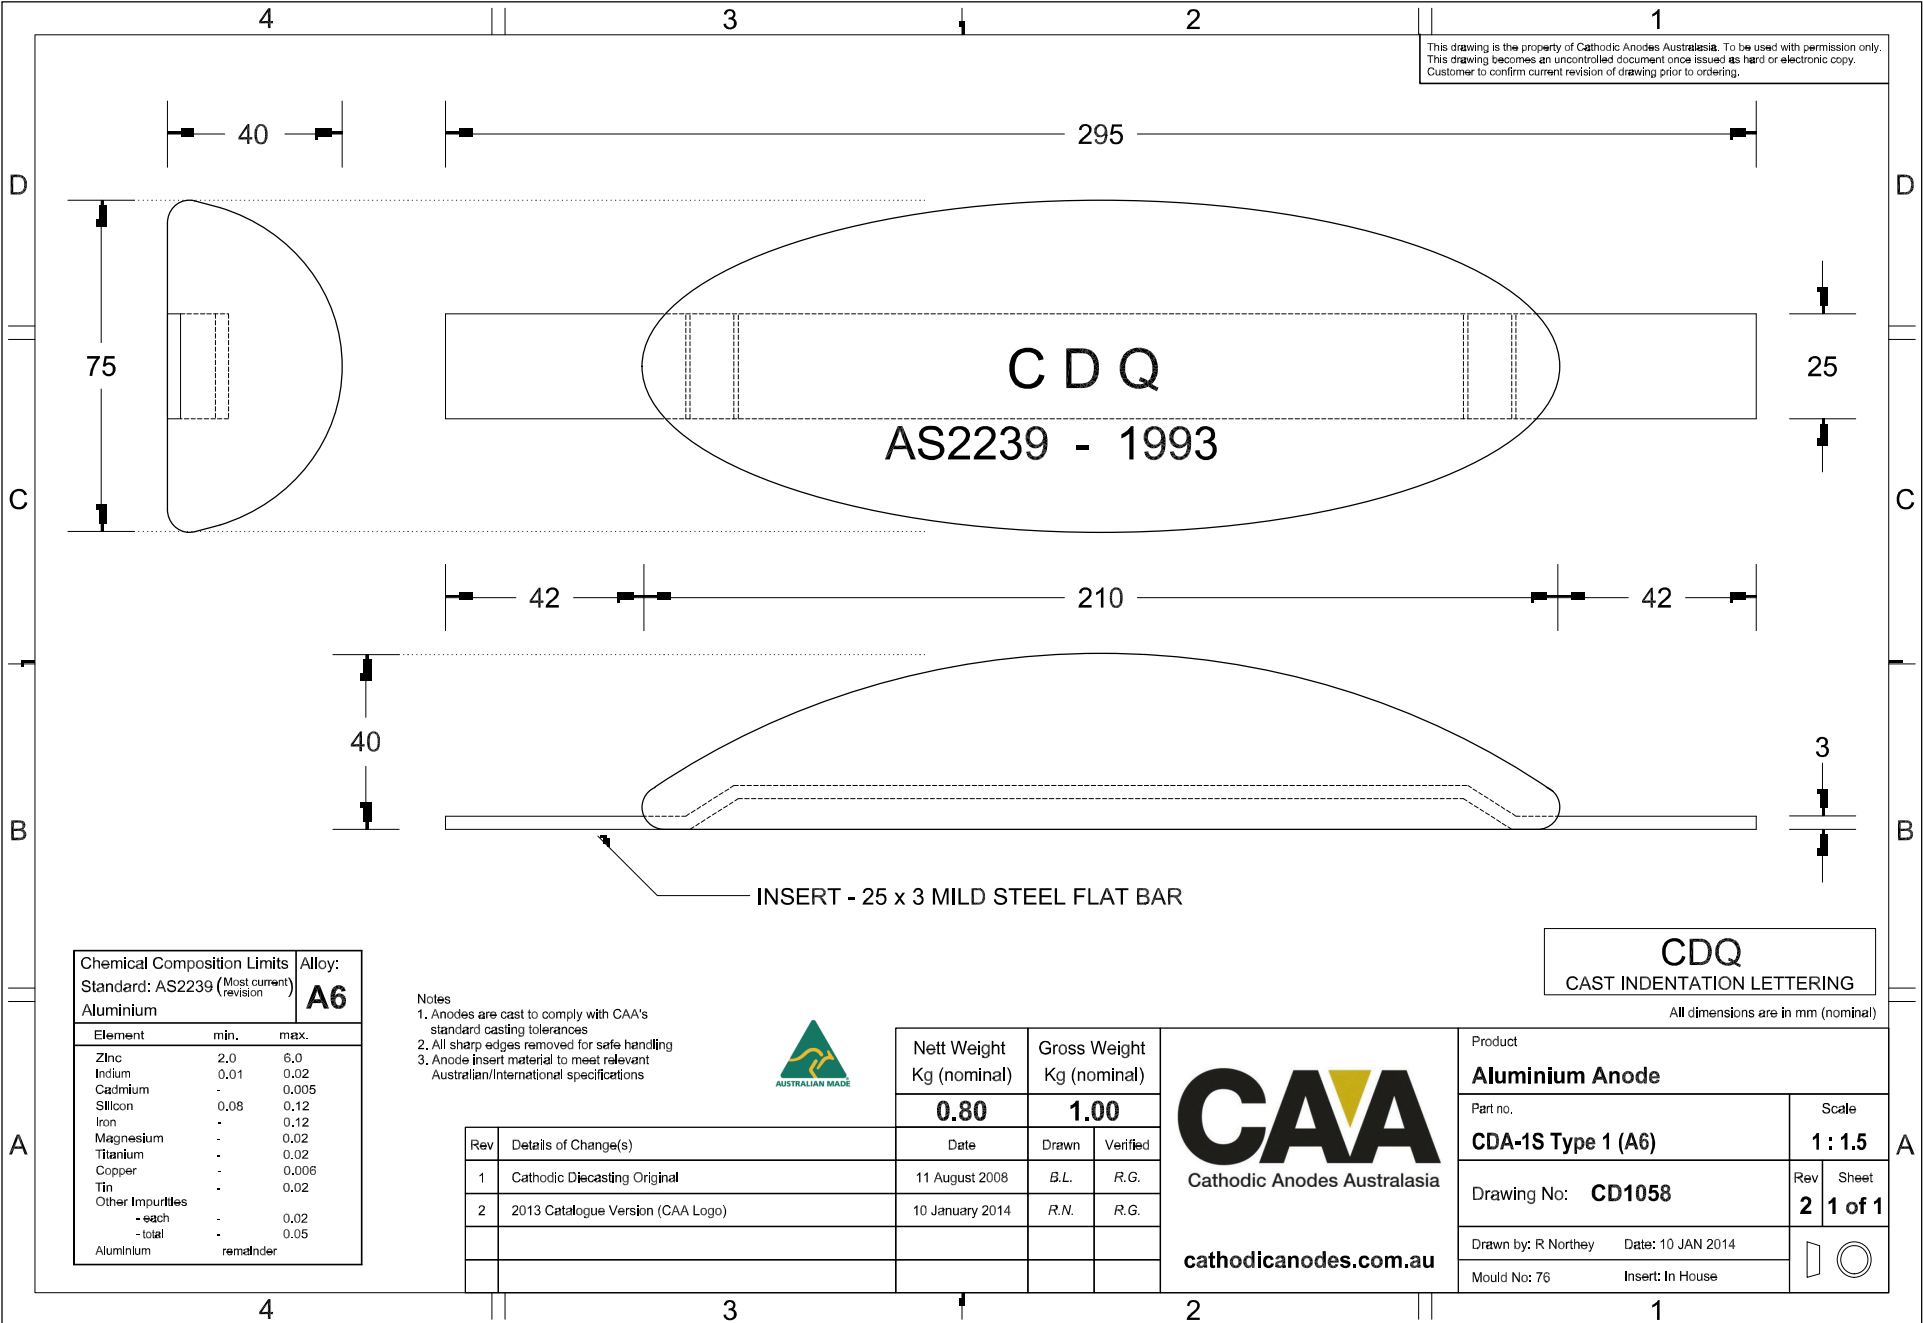

CDQ
AS2239 - 1993

INSERT - 25 x 3 MILD STEEL FLAT BAR

CDQ
 CAST INDENTATION LETTERING
 All dimensions are in mm (nominal)

Chemical Composition Limits		Alloy:
Standard: AS2239 (Most current revision)		A6
Element	min.	max.
Zinc	2.0	6.0
Indium	0.01	0.02
Cadmium	-	0.005
Silicon	0.08	0.12
Iron	-	0.12
Magnesium	-	0.02
Titanium	-	0.02
Copper	-	0.006
Tin	-	0.02
Other Impurities	-	-
- each	-	0.02
- total	-	0.05
Aluminium	remainder	

- Notes
- Anodes are cast to comply with CAA's standard casting tolerances
 - All sharp edges removed for safe handling
 - Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Drawn	Verified
1	Cathodic Diecasting Original	11 August 2008	B.L.	R.G.
2	2013 Catalogue Version (CAA Logo)	10 January 2014	R.N.	R.G.

Nett Weight	Gross Weight
Kg (nominal)	Kg (nominal)
0.80	1.00



Product		Aluminium Anode	
Part no.	CDA-1S Type 1 (A6)	Scale	1 : 1.5
Drawing No:	CD1058	Rev	2
		Sheet	1 of 1
Drawn by: R Northey	Date: 10 JAN 2014		
Mould No: 76	Insert: In House		