


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

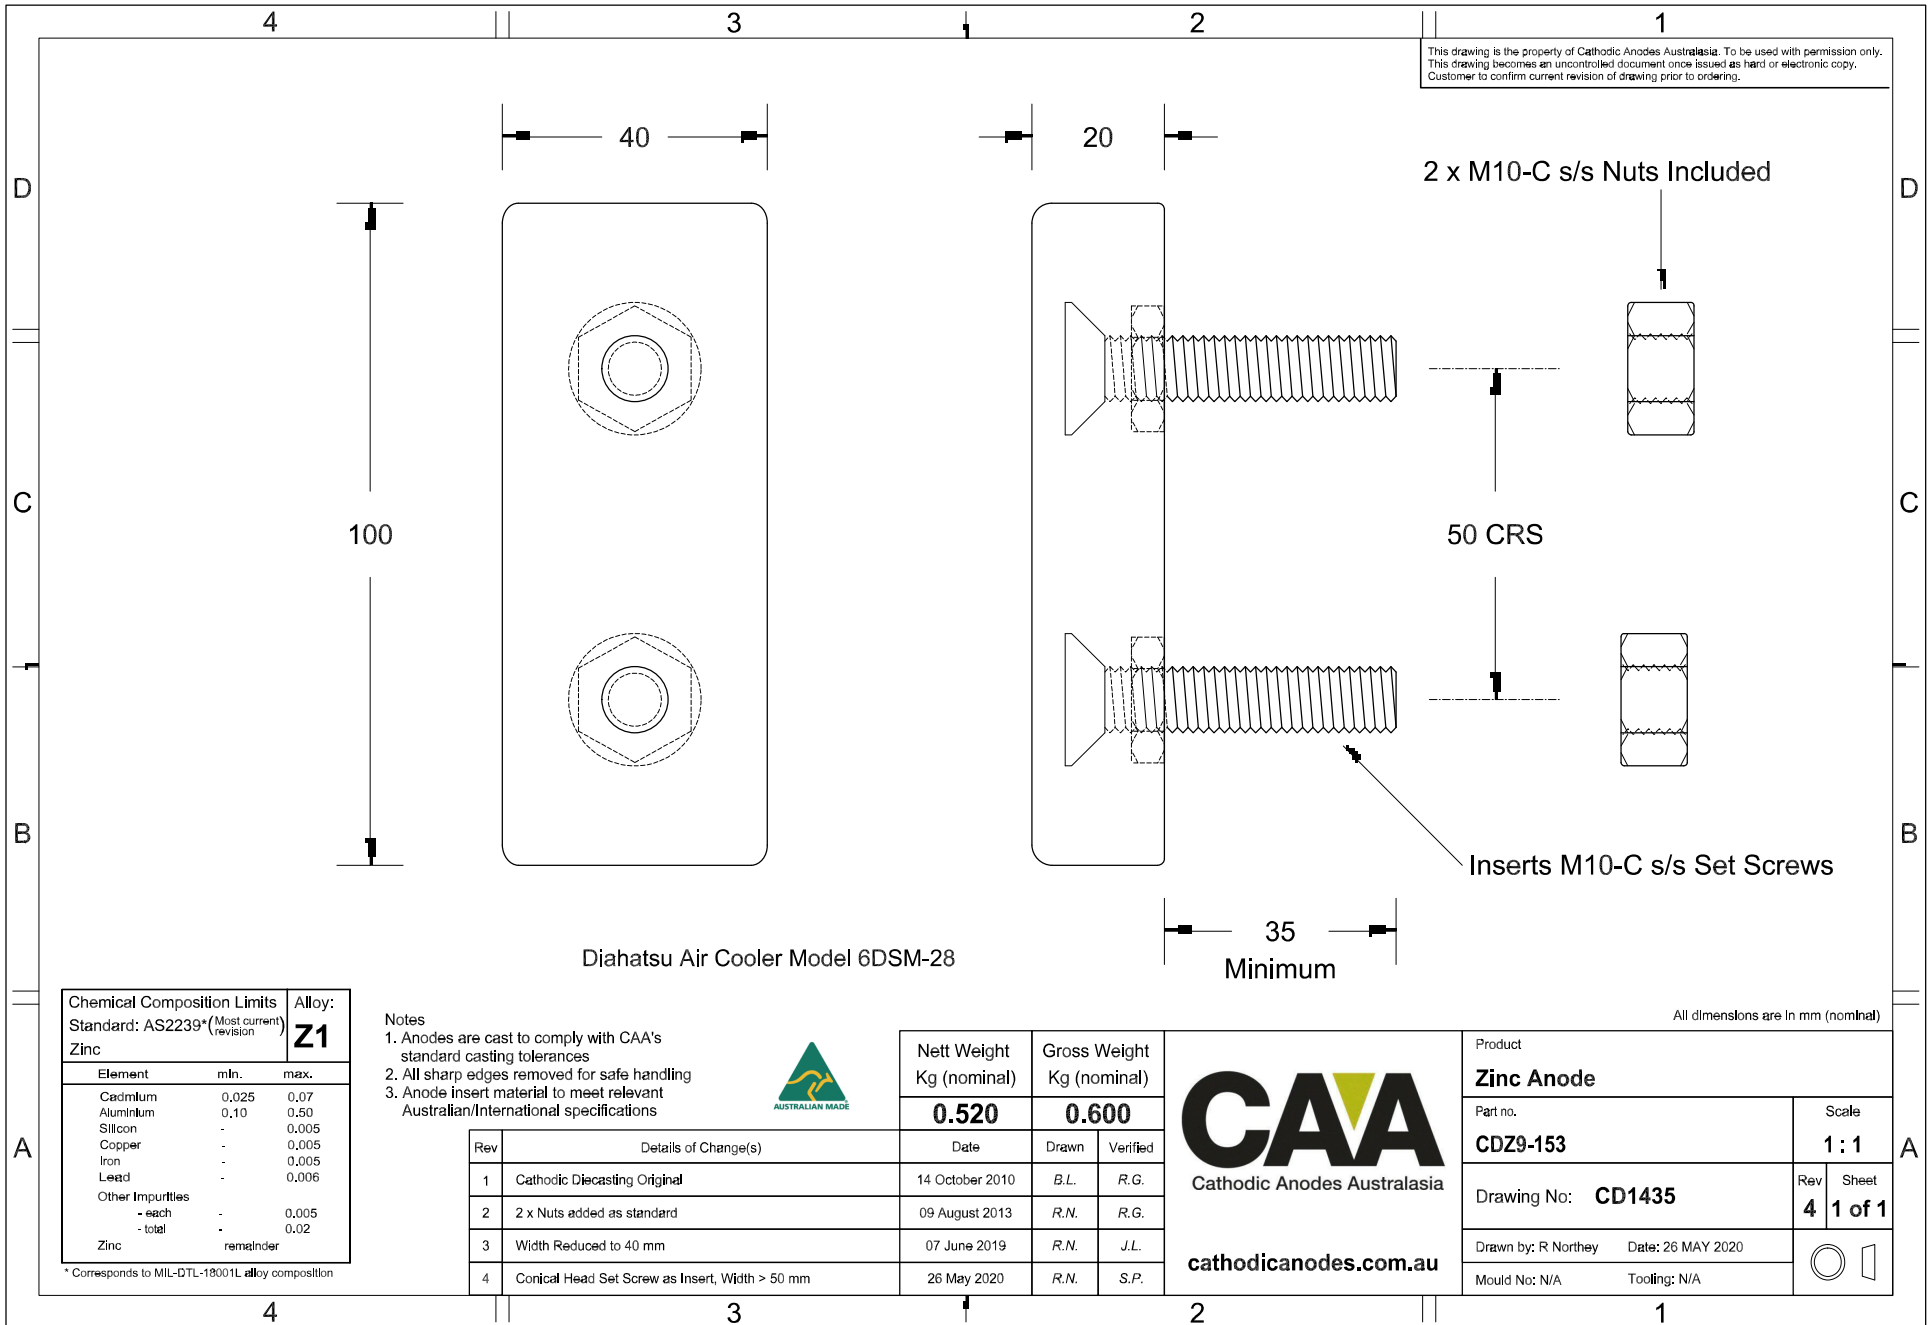

Diahatsu Air Cooler Model 6DSM-28

All dimensions are in mm (nominal)

Chemical Composition Limits			Alloy:
Standard: AS2239* (Most current revision)			Z1
Element	min.	max.	
Cadmium	0.025	0.07	
Aluminum	0.10	0.50	
Silicon	-	0.005	
Copper	-	0.005	
Iron	-	0.005	
Lead	-	0.006	
Other Impurities			
- each	-	0.005	
- total	-	0.02	
Zinc	remainder		

* Corresponds to MIL-DTL-18001L alloy composition

Notes

1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Drawn	Verified
1	Cathodic Diecasting Original	14 October 2010	B.L.	R.G.
2	2 x Nuts added as standard	09 August 2013	R.N.	R.G.
3	Width Reduced to 40 mm	07 June 2019	R.N.	J.L.
4	Conical Head Set Screw as Insert, Width > 50 mm	26 May 2020	R.N.	S.P.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
0.520	0.600

CAA
 Cathodic Anodes Australasia
cathodicanodes.com.au

Product Zinc Anode	
Part no. CDZ9-153	Scale 1 : 1
Drawing No: CD1435	Rev Sheet 4 1 of 1
Drawn by: R Northey Date: 26 MAY 2020	
Mould No: N/A Tooling: N/A	