





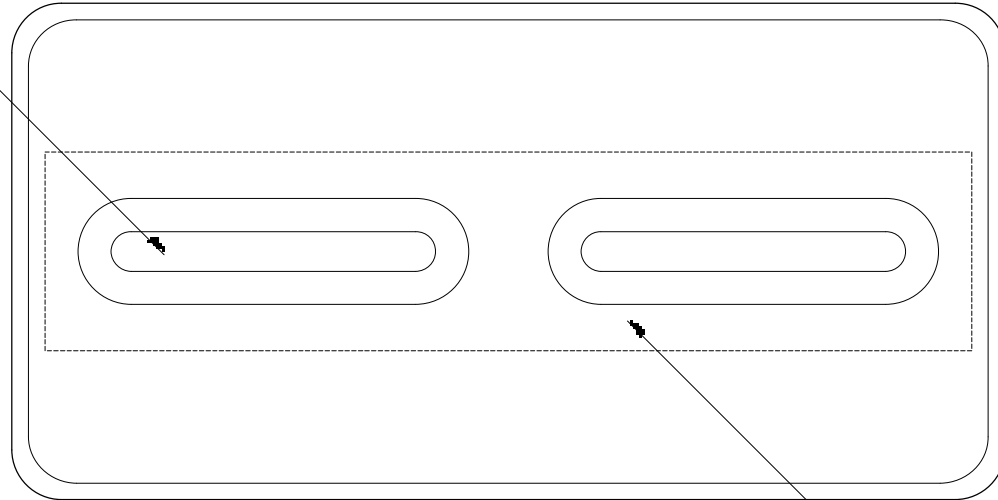



This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

2 x (12 Ø x 98) SLOTTED HOLES
 @ 142 mm CENTRES
 DETAIL BELOW

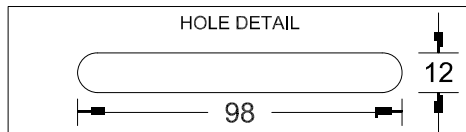

Galvanised Steel Insert
 Approx 280 x 60 x 2 mm



- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications

Chemical Composition Limits		Alloy:
Standard: AS2239* (Most current revision)		Z1
Element	min.	max.
Cadmium	0.025	0.07
Aluminium	0.10	0.50
Silicon	-	0.005
Copper	-	0.005
Iron	-	0.005
Lead	-	0.006
Other Impurities		
- each	-	0.005
- total	-	0.02
Zinc	remainder	

* Corresponds to MIL-DTL-18001L alloy composition

Rev	Details of Change(s)	Date	Drawn	Verified
1	Cathodic Diecasting Original	12 January 2011	B.L.	R.G.
2	2013 Catalogue Version (CAA Logo)	30 January 2014	R.N.	R.G.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
3.20	3.40

CAA
 Cathodic Anodes Australasia
 cathodicanodes.com.au

Product Zinc Anode		Scale 1 : 2	
Part no. CDZ1-126-500H	Drawing No: CD1465		Rev Sheet 2 1 of 1
Drawn by: R Northey Date: 30 JAN 2014			



All dimensions are in mm (nominal)