

This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.

Also Called
Z-Pellor Anode


DO NOT
PAINT
CAST INDENTATION LETTERING



2 x (40 x 5) MILD STEEL FLAT BAR

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications

All dimensions are in mm (nominal)

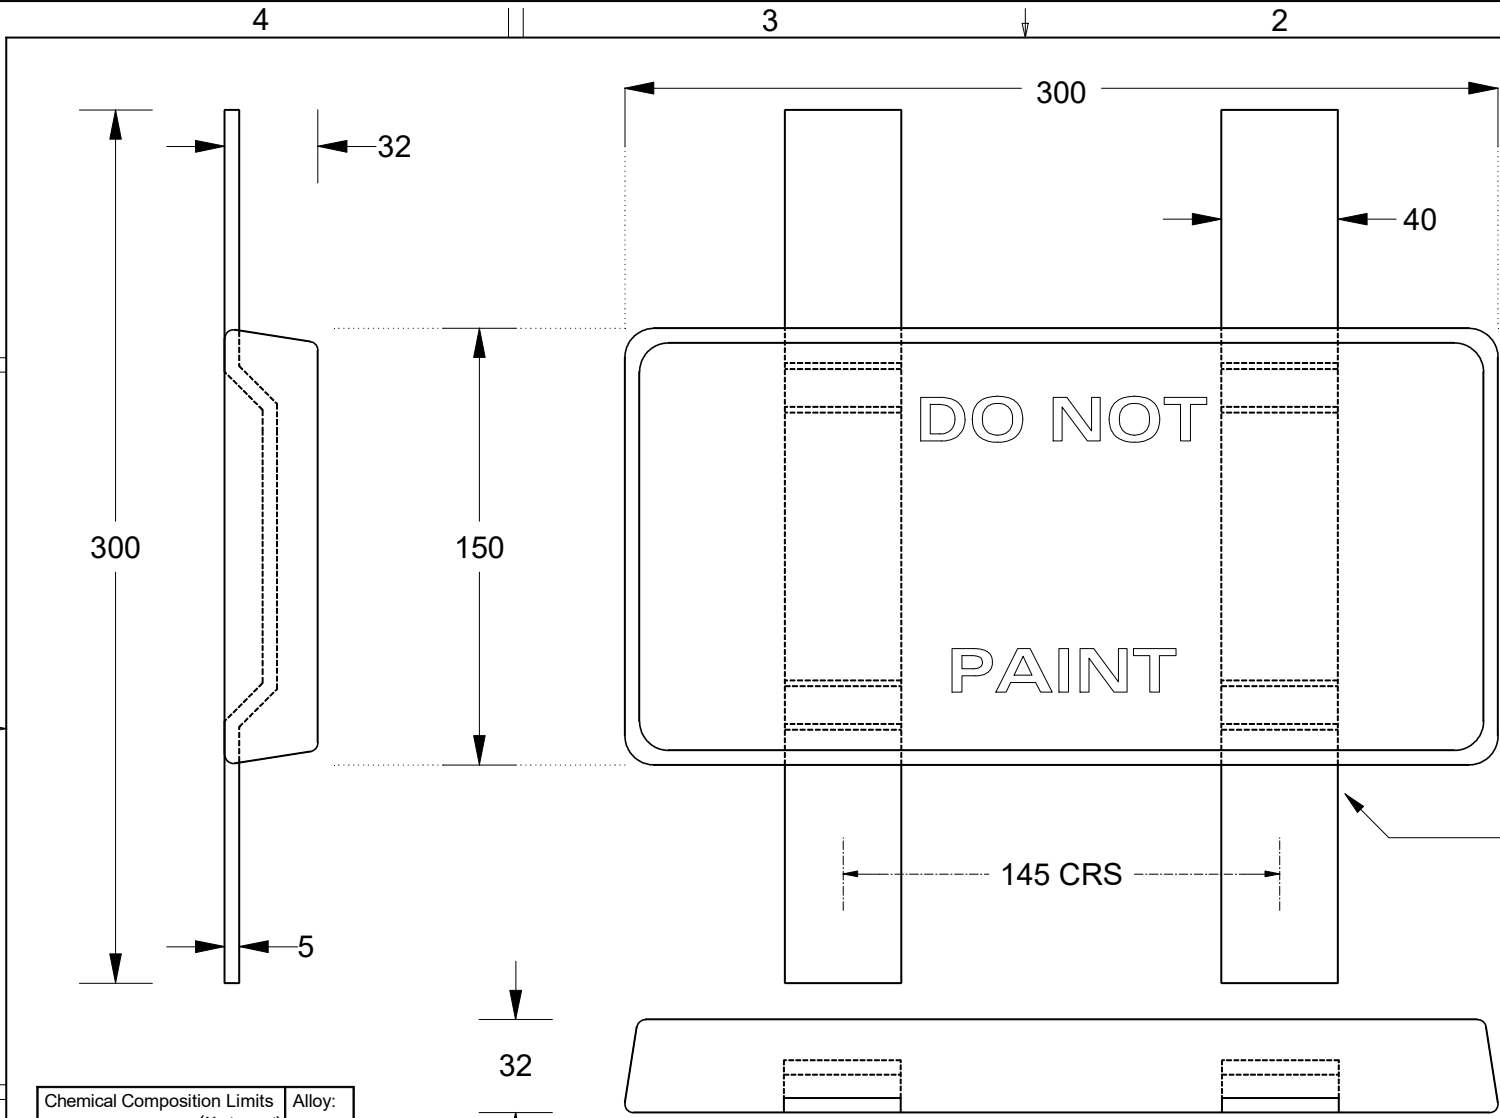

Chemical Composition Limits		Alloy:
Standard: AS2239* (Most current revision)		Z1
Element	min.	max.
Cadmium	0.025	0.07
Aluminium	0.10	0.50
Silicon	-	0.005
Copper	-	0.005
Iron	-	0.005
Lead	-	0.006
Other Impurities		
- each	-	0.005
- total	-	0.02
Zinc	remainder	

* Corresponds to MIL-DTL-18001L alloy composition

Rev	Details of Change(s)	Date	Nett Weight		Gross Weight	
			Kg (nominal)		Kg (nominal)	
			8.90		9.90	
1	Cathodic Diecasting Original	07 MAR 11		<i>B.L.</i>	<i>R.G.</i>	
2	2013 Catalogue Version (CAA Logo)	12 DEC 13		<i>R.N.</i>	<i>R.G.</i>	
3	Insert Centres Corrected from 150 mm to 145 mm	20 JUN 18		<i>R.N.</i>	<i>R.G.</i>	

CAA
Cathodic Anodes Australasia
cathodicanodes.com.au

Product Zinc Anode		Scale 1 : 2.5	
Part no. CDZ8-126-1.25S ZP		Rev 3	Sheet 1 of 1
Drawing No: CD1482		Drawn by: R Northey Date: 20 JUN 2018	
Mould No: N/A		Strap Sample (2 x) # 31	