


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.  
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.  
 Customer to confirm current revision of drawing prior to ordering.

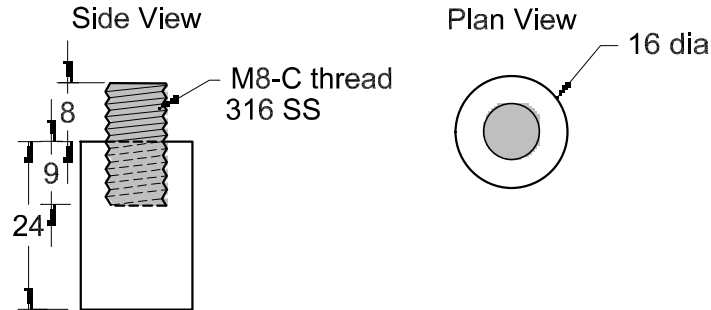

Notes

1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications

Chemical Composition Limits		Alloy:
Standard: AS2239* (Most current revision)		<b>Z1</b>
Element	min.	max.
Cadmium	0.025	0.07
Aluminium	0.10	0.50
Silicon	-	0.005
Copper	-	0.005
Iron	-	0.005
Lead	-	0.006
Other Impurities		
- each	-	0.005
- total	-	0.02
Zinc	remainder	

\* Corresponds to MIL-DTL-18001L alloy composition



Nett Weight (nominal)	Gross Weight (nominal)
<b>28 grams</b>	<b>35 grams</b>

Rev	Details of Change(s)	Date	Drawn	Verified
2	16mm dia	07AUG20	BL	MS
1	For manufacture	29OCT13	BL	MS

**CAA**  
 Cathodic Anodes Australasia  
 cathodicanodes.com.au

All dimensions are in mm (nominal)

Product <b>Zinc Anode</b>		Scale <b>1 to 1</b>
Part no. <b>CDZ9-190</b>		Rev Sheet <b>2 1 of 1</b>
Drawing no. <b>CD1670</b>		Drawn by: BL Verified by: MS Date: 07AUG20