
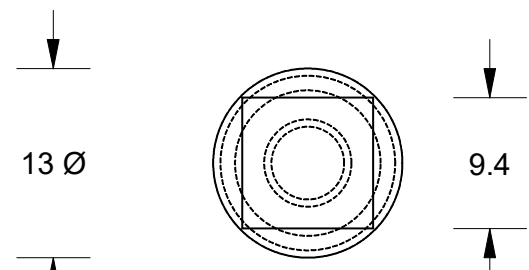
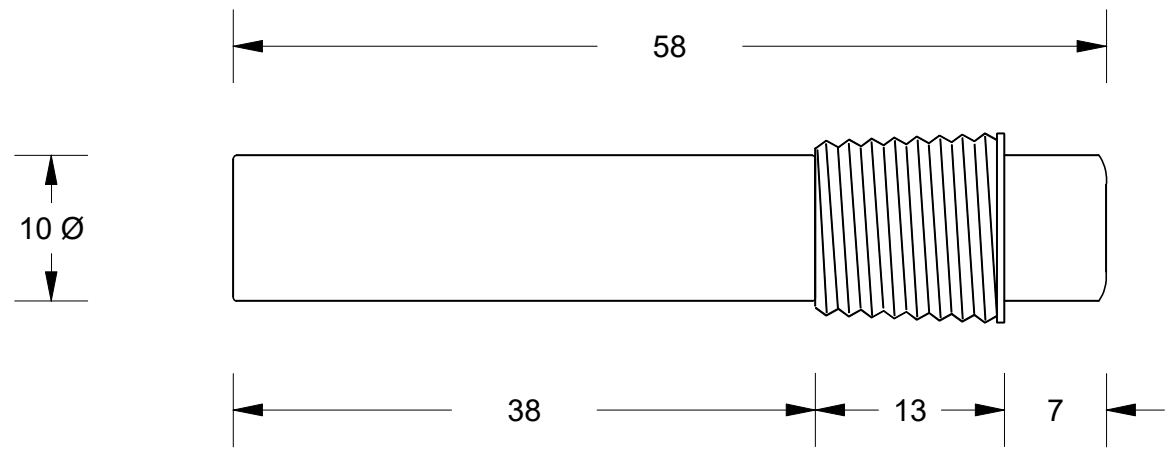
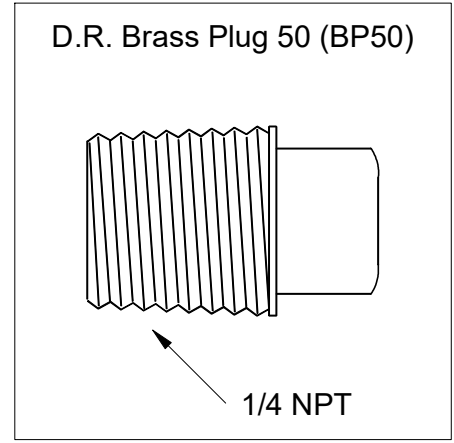


4 3 2
COMBINATION SET - Individual Components Shown At Top - Plug Material: DEZINCIFICATION RESISTANT BRASS

1
This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.

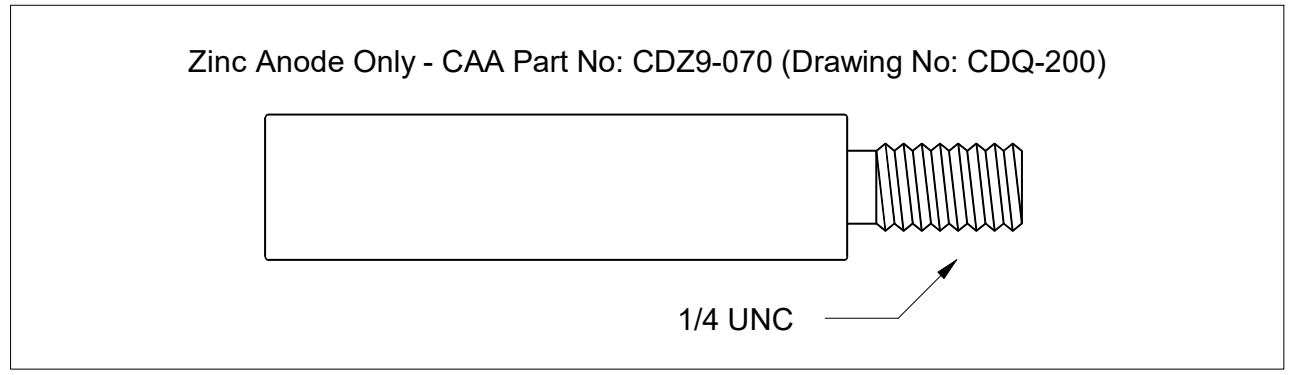

NO SHARP EDGES

All dimensions are in mm (nominal)

Chemical Composition Limits		Alloy:
Element	min.	max.
Standard: AS2239* (Most current revision)		
Zinc Z1		
Cadmium	0.025	0.07
Aluminium	0.10	0.50
Silicon	-	0.005
Copper	-	0.005
Iron	-	0.005
Lead	-	0.006
Other Impurities		
- each	-	0.005
- total	-	0.02
Zinc	remainder	

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Drawn	Verified
1	Cathodic Diecasting Original	29 April 2011	R.N.	R.G.
2	2013 Catalogue Version (CAA Logo)	13 April 2015	R.N.	R.G.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
0.020	0.040



cathodicanodes.com.au

Product Zinc Anode & DR Brass Plug	
Part no. CDZ9-075	Scale 2 : 1
Drawing No: CD2100	Rev 2 Sheet 1 of 1
Drawn by: R Northey Date: 13 APR 2015	

* Corresponds to MIL-DTL-18001L alloy composition