




COMBINATION SET - Individual Components Shown At Top - Plug Material: DEZINCIFICATION RESISTANT BRASS

This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

Zinc Anode Only - CAA Part No: CDZ9-072 (Drawing No: CD1048)



D.R. Brass Plug 51 (BP51)

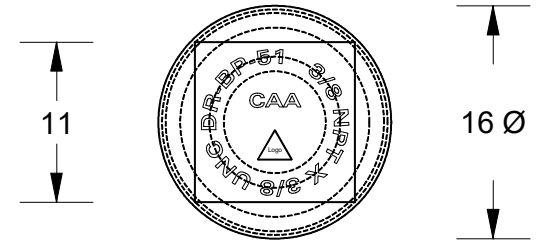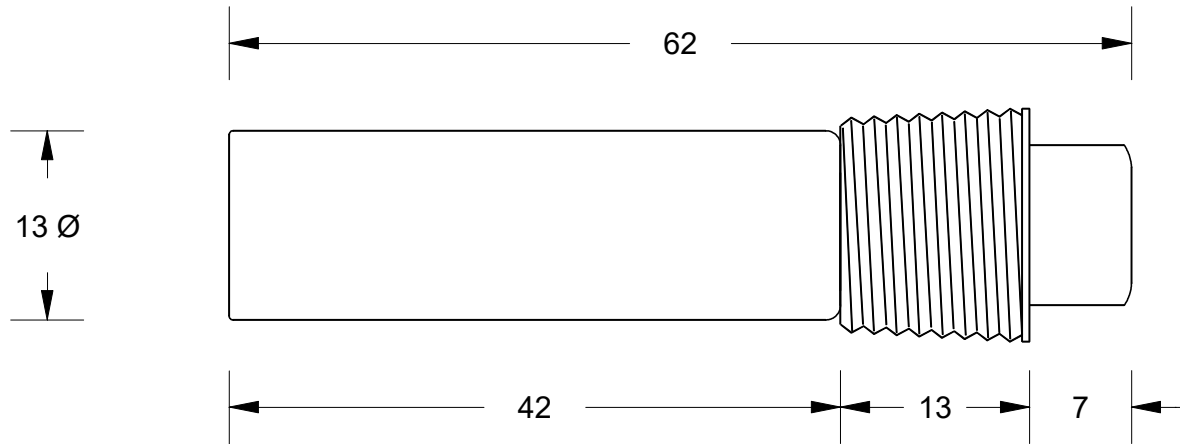

NO SHARP EDGES

 = Australian Made Logo

All dimensions are in mm (nominal)

Chemical Composition Limits			Alloy: Z1
Standard: AS2239* (Most current revision)			
Zinc			
Element	min.	max.	
Cadmium	0.025	0.07	
Aluminium	0.10	0.50	
Silicon	-	0.005	
Copper	-	0.005	
Iron	-	0.005	
Lead	-	0.006	
Other Impurities			
- each	-	0.005	
- total	-	0.02	
Zinc	remainder		

* Corresponds to MIL-DTL-18001L alloy composition


Notes

- Anodes are cast to comply with CAA's standard casting tolerances
- All sharp edges removed for safe handling
- Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Drawn	Verified
1	Cathodic Diecasting Original	03 June 2011	R.N.	R.G.
2	2013 Catalogue Version (CAA Logo)	14 April 2015	R.N.	R.G.
3	Stamping & Logo added to DR Brass Plug	17 Nov 2020	R.N.	R.G.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
0.040	0.060



cathodicanodes.com.au

Product			
Zinc Anode & DR Brass Plug			
Part no.	Scale		
CDZ9-081	2 : 1		
Drawing No:	Rev	Sheet	
CD2114	3	1 of 1	
Drawn by: R Northey	Date: 17 NOV 2020		
		