
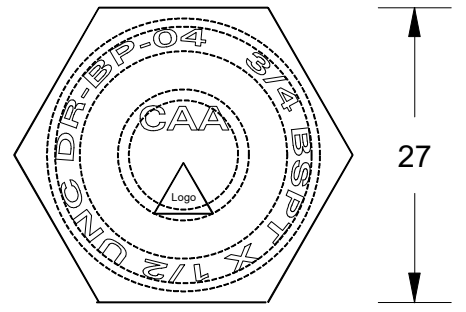
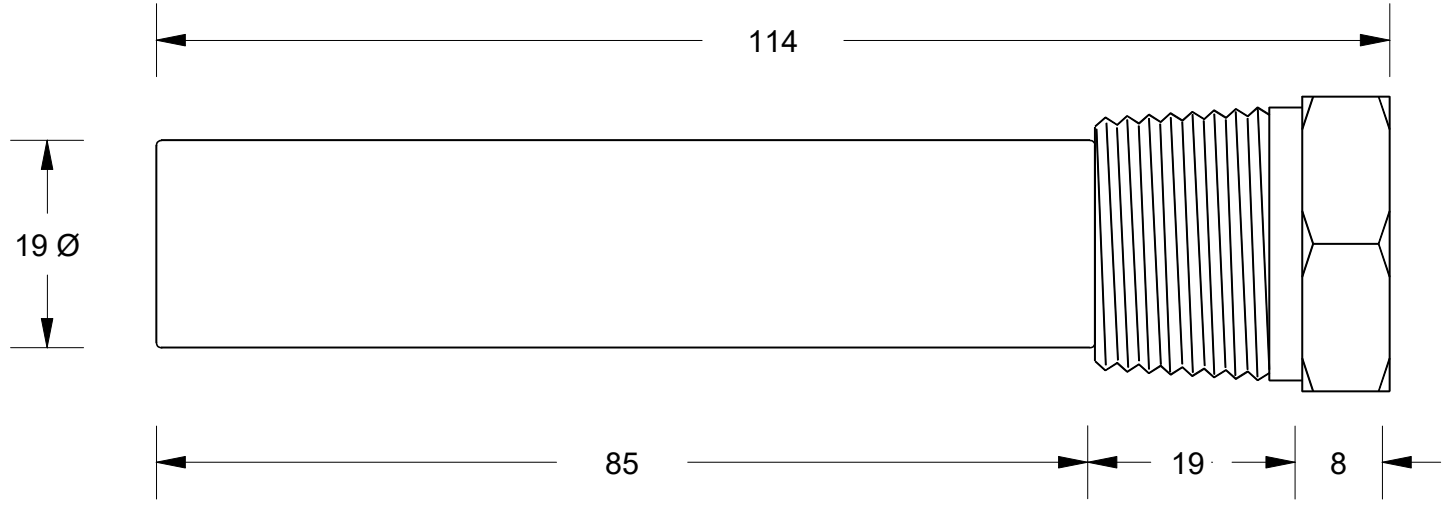
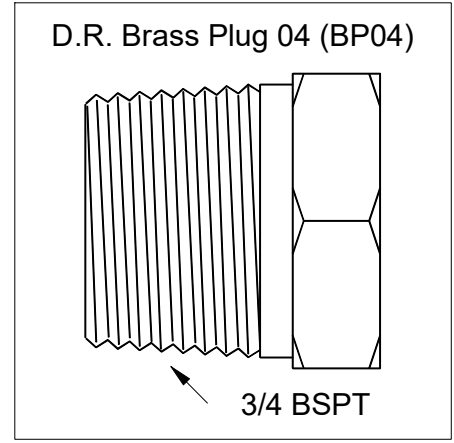


COMBINATION SET - Individual Components Shown At Top - Plug Material: DEZINCIFICATION RESISTANT BRASS

This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.

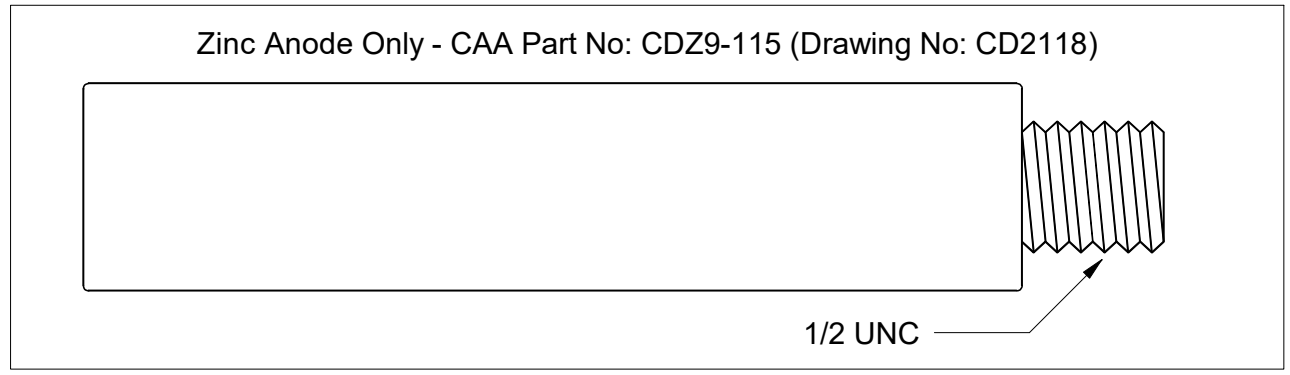

NO SHARP EDGES
 Logo = Australian Made Logo

All dimensions are in mm (nominal)

Chemical Composition Limits		Alloy:
Element	min.	max.
Standard: AS2239* (Most current revision)		Z1
Zinc		
Cadmium	0.025	0.07
Aluminium	0.10	0.50
Silicon	-	0.005
Copper	-	0.005
Iron	-	0.005
Lead	-	0.006
Other Impurities		
- each	-	0.005
- total	-	0.02
Zinc		remainder

* Corresponds to MIL-DTL-18001L alloy composition

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Nett Weight		Gross Weight	
			Kg (nominal)		Kg (nominal)	
			0.160		0.260	
1	Cathodic Diecasting Original	07 June 2011		R.N.		R.G.
2	2013 Catalogue Version (CAA Logo)	15 April 2015		R.N.		R.G.
3	Stamping & Logo added to DR Brass Plug	10 Nov 2020		R.N.		R.G.

CAA
 Cathodic Anodes Australasia
 cathodicanodes.com.au

Product			
Zinc Anode & DR Brass Plug			
Part no.		Scale	
CDZ9-116		1.5 : 1	
Drawing No: CD2119		Rev	Sheet
		3	1 of 1
Drawn by: R Northey		Date: 10 NOV 2020	