
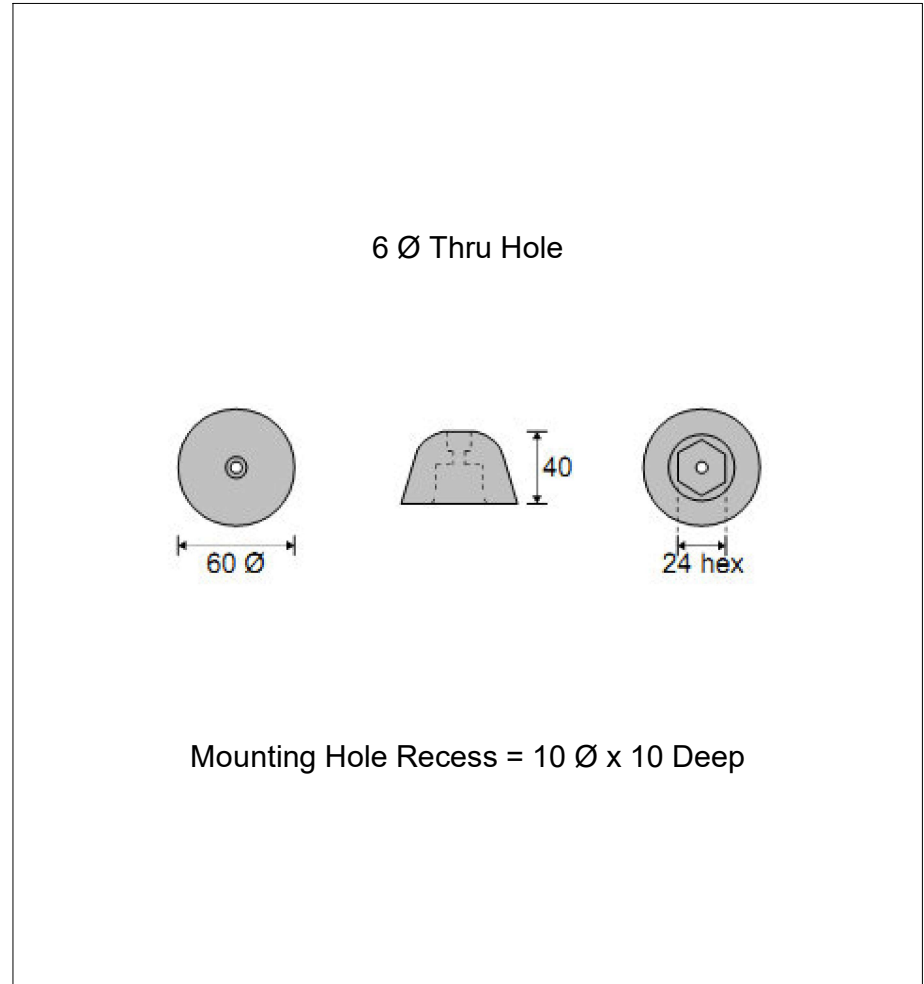


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.  
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.  
 Customer to confirm current revision of drawing prior to ordering.

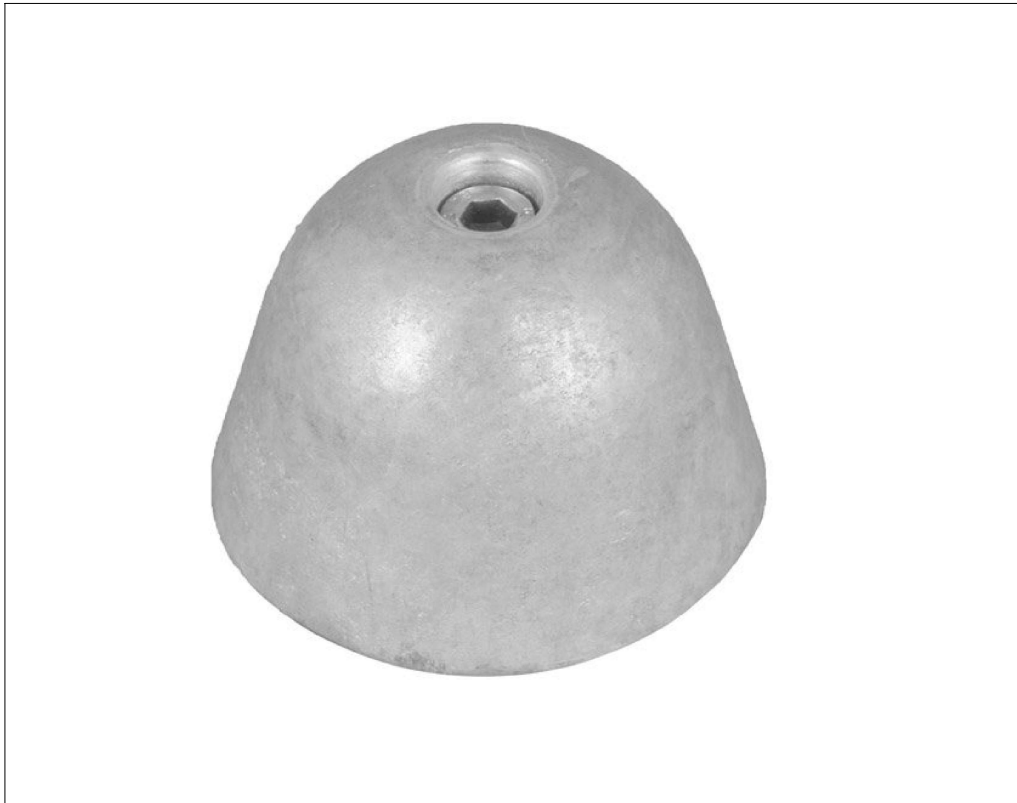

**Bow Thruster Anode to suit Models 130Kgf, 160Kgf**  
**Replaces Genuine Part: BP 195E**

All dimensions are in mm (nominal)

Chemical Composition Limits		Alloy:
Standard: AS2239* (Most current revision)		<b>Z1</b>
Element	min.	max.
Cadmium	0.025	0.07
Aluminium	0.10	0.50
Silicon	-	0.005
Copper	-	0.005
Iron	-	0.005
Lead	-	0.006
Other Impurities		
- each	-	0.005
- total	-	0.02
Zinc		remainder


\* Corresponds to MIL-DTL-18001L alloy composition

**Notes**

1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications

Rev	Details of Change(s)	Date	Drawn	Verified
1	Cathodic Diecasting Original	09 Jun 2011	R.N.	R.G.
2	2013 / 2019 Catalogue Version (CAA Logo)	20 Aug 2020	R.N.	R.G.

Nett Weight	Gross Weight
Kg (nominal)	Kg (nominal)
<b>0.400</b>	<b>0.400</b>



[cathodicanodes.com.au](http://cathodicanodes.com.au)

Product		<b>Zinc Anode</b>	
Part no.	<b>CDZ9-098</b>	Scale	<b>NTS</b>
Drawing No:	<b>CD2136</b>	Rev	<b>2</b>
Drawn by: R Northey	Date: 20 AUG 2020	Sheet	<b>1 of 1</b>
Mould No: X	Tooling:		