


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

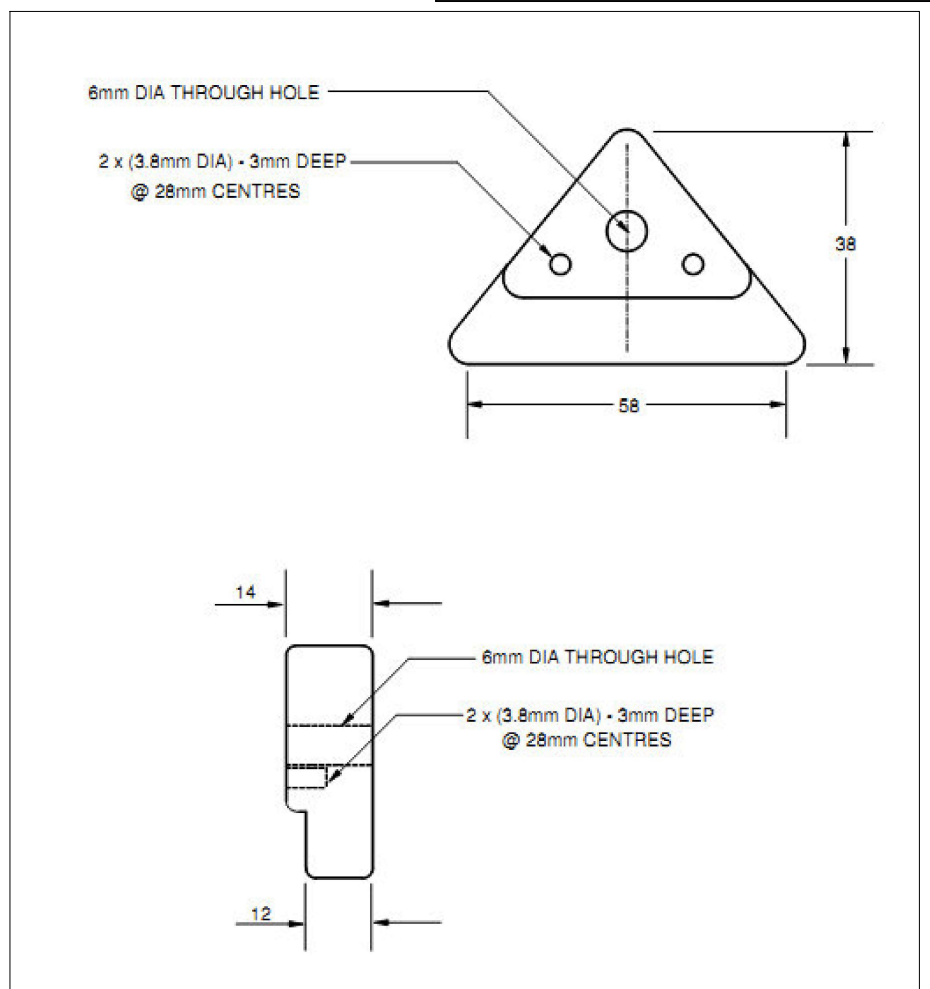

Stern Drive Anode
 Replaces Genuine Part: 872793

All dimensions are in mm (nominal)

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications

| Rev | Details of Change(s) | Date | Drawn | Verified |
|-----|--|-------------|-------|----------|
| 1 | Cathodic Diecasting Original | 10 Jun 2011 | R.N. | R.G. |
| 2 | 2013 / 2019 Catalogue Version (CAA Logo) | 19 Aug 2020 | R.N. | R.G. |
| | | | | |
| | | | | |

| Nett Weight Kg (nominal) | Gross Weight Kg (nominal) |
|-----------------------------|------------------------------|
| 0.110 | 0.110 |

CAA
 Cathodic Anodes Australasia
 cathodicanodes.com.au

| | |
|---------------------------------------|----------------------------------|
| Product Zinc Anode | |
| Part no. CDZ9-076 | Scale NTS |
| Drawing No: CD2140 | Rev 2 Sheet 1 of 1 |
| Drawn by: R Northey Date: 19 AUG 2020 | |
| Mould No: X Tooling: | |

| Chemical Composition Limits | | Alloy: |
|---|-----------|-----------|
| Standard: AS2239* (Most current revision) | | Z1 |
| Element | min. | max. |
| Cadmium | 0.025 | 0.07 |
| Aluminium | 0.10 | 0.50 |
| Silicon | - | 0.005 |
| Copper | - | 0.005 |
| Iron | - | 0.005 |
| Lead | - | 0.006 |
| Other Impurities | | |
| - each | - | 0.005 |
| - total | - | 0.02 |
| Zinc | remainder | |

* Corresponds to MIL-DTL-18001L alloy composition