





This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.

Counter-Bore




67

Note: Marking "40"

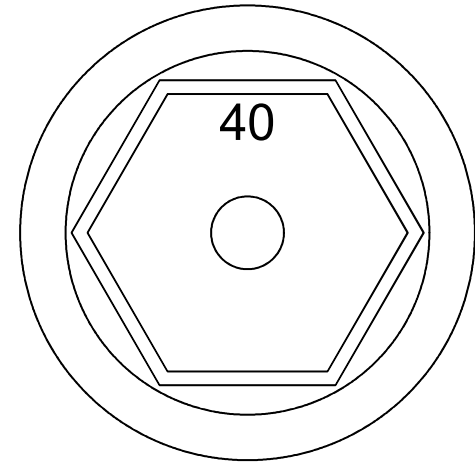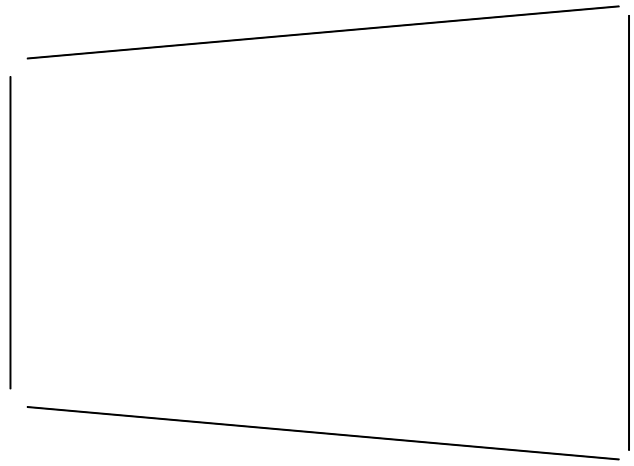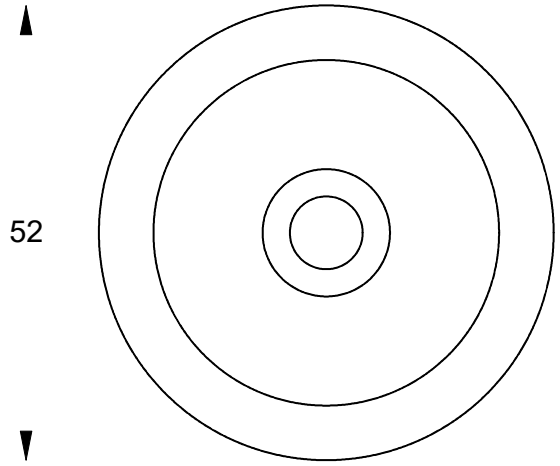

36 Hex



Thru Hole

Component is part of a Combination Set

Part Number: CDZPN-240 HZ - Zinc Anode Only

Part Number: CDZPN-240 HZC - Zinc Anode & Bronze Insert

Part Number: CDZPN-240 HB - Bronze Insert Only

All dimensions are in mm (nominal)

| Chemical Composition Limits | | Alloy: |
|---|-----------|-----------|
| Standard: AS2239* (Most current revision) | | Z1 |
| Element | min. | max. |
| Zinc | | |
| Cadmium | 0.025 | 0.07 |
| Aluminium | 0.10 | 0.50 |
| Silicon | - | 0.005 |
| Copper | - | 0.005 |
| Iron | - | 0.005 |
| Lead | - | 0.006 |
| Other Impurities | | |
| - each | - | 0.005 |
| - total | - | 0.02 |
| Zinc | remainder | |

- Notes
- Anodes are cast to comply with CAA's standard casting tolerances
 - All sharp edges removed for safe handling
 - Anode insert material to meet relevant Australian/International specifications

| Rev | Details of Change(s) | Date | Nett Weight | | Gross Weight | |
|-----|--|---------------|--------------|------|--------------|------|
| | | | Kg (nominal) | | Kg (nominal) | |
| | | | N/A | | 0.460 | |
| 1 | Initial Drawing - 2013 Catalogue Version | 31 March 2016 | | R.N. | | R.G. |
| | | | | | | |
| | | | | | | |
| | | | | | | |

CAA
Cathodic Anodes Australasia
cathodicanodes.com.au

| | | | |
|---------------------|---------------------|---------------------------------|-----------------|
| Product | | Zinc Propeller Nut Anode | |
| Part no. | CDZPN-240 HZ | Scale | 1.25 : 1 |
| Drawing No: | CD2215 | Rev | 1 |
| Drawn by: R Northey | Date: 31 MAR 2016 | Sheet | 1 of 1 |
| | | | |

* Corresponds to MIL-DTL-18001L alloy composition