


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.


2 x S/S Socket Head Cap Screws, 2 x S/S Spring Washers

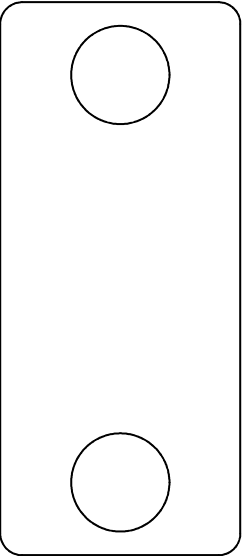

76 Ø

33

35 mm Ø

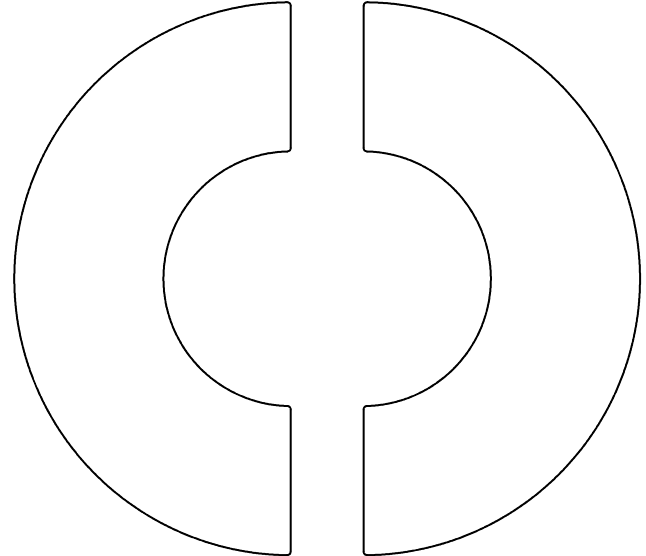

2 x "Cast In" S/S Hex Nuts

2 x Copper Contacts

| Chemical Composition Limits | | | Alloy: Z1 |
|---|-----------|-------|---------------------|
| Standard: AS2239* (Most current revision) | | | |
| Element | min. | max. | |
| Zinc | | | |
| Cadmium | 0.025 | 0.07 | |
| Aluminium | 0.10 | 0.50 | |
| Silicon | - | 0.005 | |
| Copper | - | 0.005 | |
| Iron | - | 0.005 | |
| Lead | - | 0.006 | |
| Other Impurities | | | |
| - each | - | 0.005 | |
| - total | - | 0.02 | |
| Zinc | remainder | | |

* Corresponds to MIL-DTL-18001L alloy composition

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications

| Rev | Details of Change(s) | Date | Drawn | Verified |
|-----|----------------------|--------------|-------|----------|
| 1 | Introduced July 2016 | 13 July 2016 | R.N. | R.G. |
| | | | | |
| | | | | |
| | | | | |

| Nett Weight Kg (nominal) | Gross Weight Kg (nominal) |
|-----------------------------|------------------------------|
| 0.685 | 0.700 |



Cathodic Anodes Australasia

cathodicanodes.com.au

| | |
|--|----------------------------------|
| Product Zinc Anode - DONUT Shaft Anode | |
| Part no. CDZ4 - 35 DM | Scale 1 : 1 |
| Drawing No: CD2293 | Rev 1 Sheet 1 of 1 |
| Drawn by: R Northey Date: 13 JUL 2016 | |

All dimensions are in mm (nominal)