
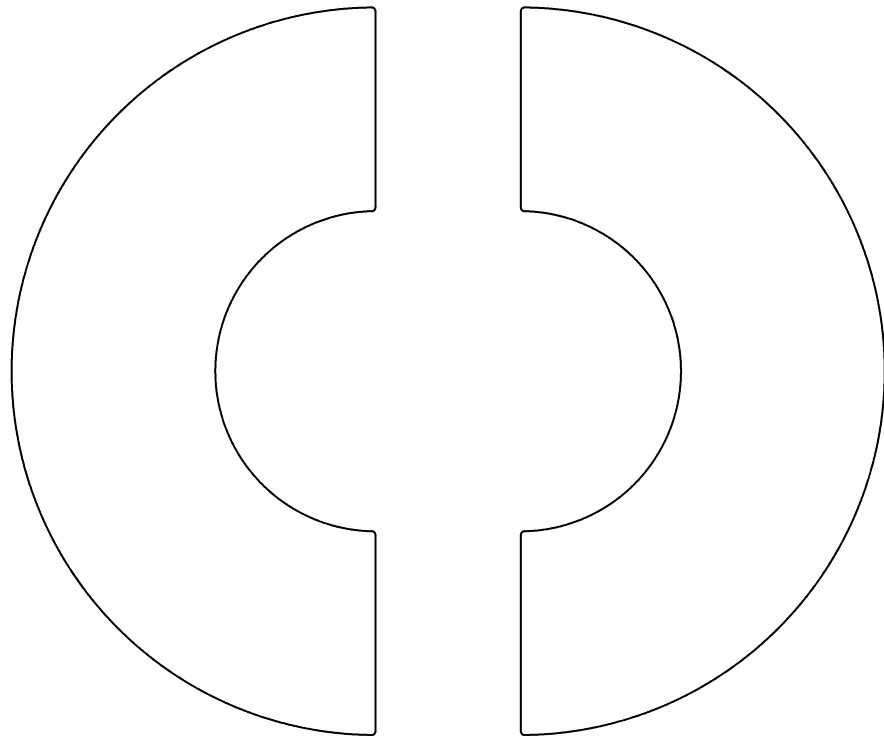


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.

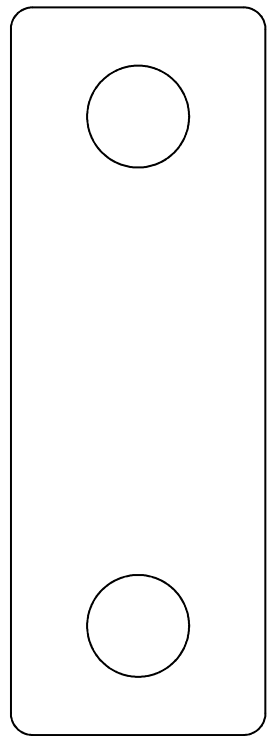

2 x "Cast In" S/S Hex Nuts

2 x Copper Contacts

Chemical Composition Limits			Alloy:
Standard: AS2239* (Most current revision)			Z1
Zinc			
Element	min.	max.	
Cadmium	0.025	0.07	
Aluminium	0.10	0.50	
Silicon	-	0.005	
Copper	-	0.005	
Iron	-	0.005	
Lead	-	0.006	
Other Impurities			
- each	-	0.005	
- total	-	0.02	
Zinc	remainder		


* Corresponds to MIL-DTL-18001L alloy composition

Notes

1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications

All dimensions are in mm (nominal)

Rev	Details of Change(s)	Date	Nett Weight		Gross Weight	
			Kg (nominal)		Kg (nominal)	
			1.435		1.450	
1	Introduced July 2016	13 July 2016		<i>R.N.</i>		<i>R.G.</i>



Cathodic Anodes Australasia

cathodicanodes.com.au

Product			
Zinc Anode - DONUT Shaft Anode			
Part no.		Scale	
CDZ4 - 45 DM		1 : 1	
Drawing No: CD2295		Rev	Sheet
		1	1 of 1
Drawn by: R Northey		Date: 13 JUL 2016	