


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.

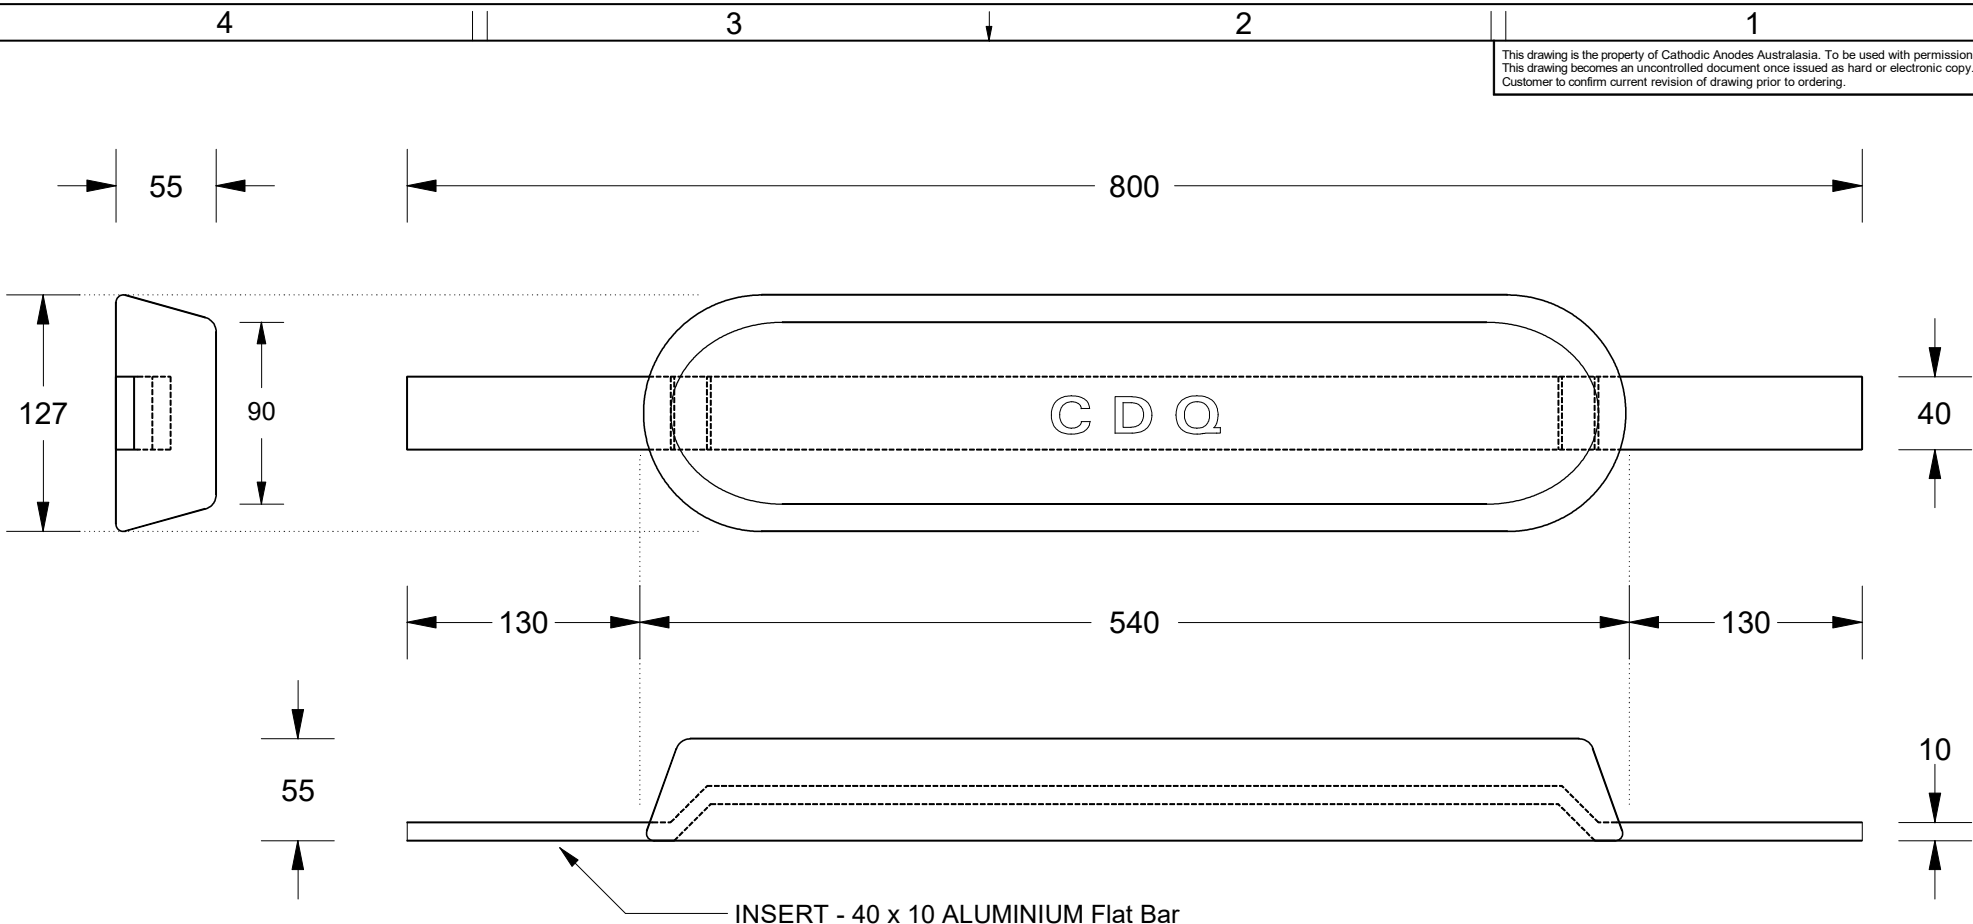

Intended Use - for ALUMINIUM Hull Vessels

C D Q  
CAST INDENTATION LETTERING

Chemical Composition Limits			Alloy: <b>Z1</b>
Standard: AS2239* (Most current revision)			
Zinc			
Element	min.	max.	
Cadmium	0.025	0.07	
Aluminium	0.10	0.50	
Silicon	-	0.005	
Copper	-	0.005	
Iron	-	0.005	
Lead	-	0.006	
Other Impurities			
- each	-	0.005	
- total	-	0.02	
Zinc	remainder		

\* Corresponds to MIL-DTL-18001L alloy composition


Notes

1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications



Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
<b>20.8</b>	<b>21.5</b>

Rev	Details of Change(s)	Date	Drawn	Verified
1	For Manufacture	13 FEB 17	R.N.	R.G.



Cathodic Anodes Australasia

cathodicanodes.com.au

All dimensions are in mm (nominal)

Product	
<b>Zinc Anode - c/w ALUMINIUM Insert</b>	
Part no.	Scale
<b>CDZ8-22-200 ALS</b>	<b>1 : 4</b>
Drawing No: <b>CD2343</b>	Rev Sheet
	<b>1 1 of 1</b>
Drawn by: R Northey	Date: 13 FEB 2017
Mould No: 11	Strap Sample 01

