



This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.

40

330

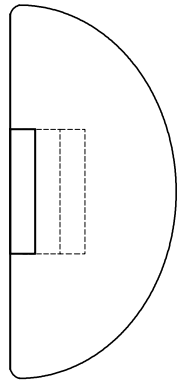

80

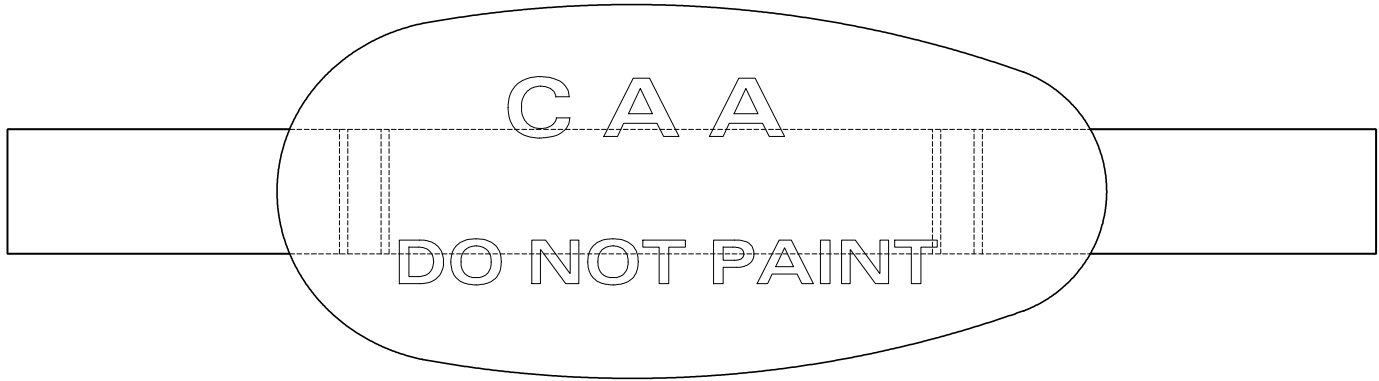

32

65 200 65

40



6

INSERT - 32 x 6 Aluminium

Intended Use - for ALUMINIUM Hull Vessels

All dimensions are in mm (nominal)

Chemical Composition Limits		Alloy:
Standard: AS2239* (Most current revision)		Z1
Element	min.	max.
Cadmium	0.025	0.07
Aluminium	0.10	0.50
Silicon	-	0.005
Copper	-	0.005
Iron	-	0.005
Lead	-	0.006
Other Impurities	-	0.005
- each	-	0.02
- total	-	0.02
Zinc	remainder	

* Corresponds to MIL-DTL-18001L alloy composition

Notes

- Anodes are cast to comply with CAA's standard casting tolerances
- All sharp edges removed for safe handling
- Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Drawn	Verified
1	For Manufacture	24 Feb 2017	R.N.	R.G.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
2.20	2.50

CAA
Cathodic Anodes Australasia
cathodicanodes.com.au

Product Zinc Anode	
Part no. CDZ3-8ALS Type1 2.5 kg	Scale 1 : 1.75
Drawing No: CD2353	Rev 1 Sheet 1 of 1
Drawn by: R Northey	Date: 24 FEB 2017
Mould No:	Strap Sample: Custom

4

3

2

1

4

3

2

1