



This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.

45

330

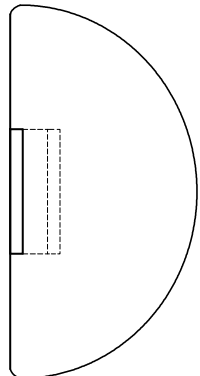


85

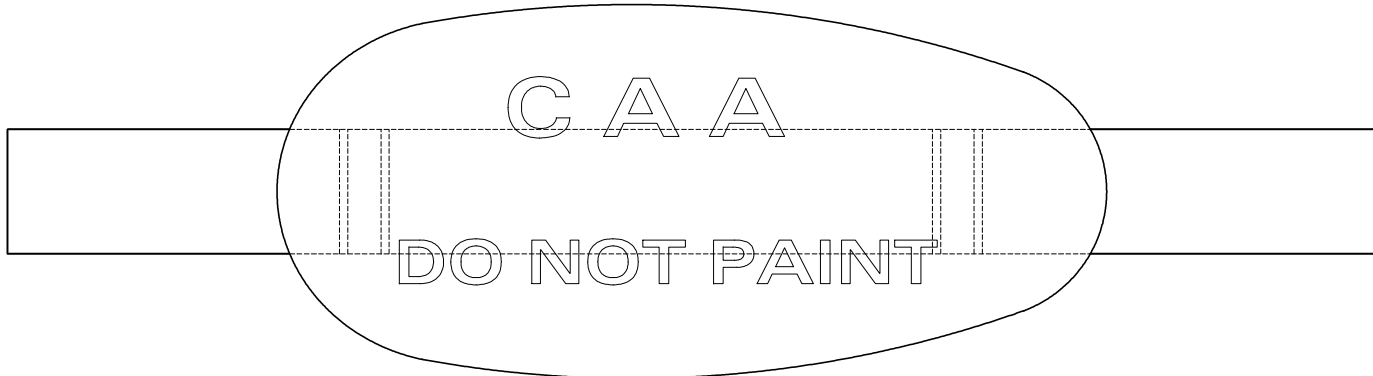

32

65 200 65

45

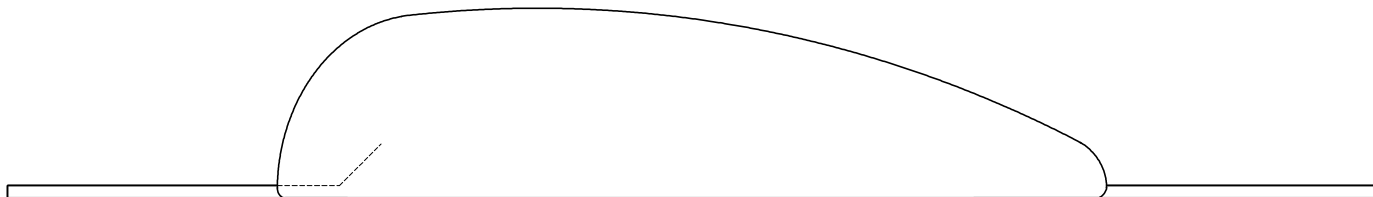

3



INSERT - 32 x 3 MILD STEEL FLAT

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications

All dimensions are in mm (nominal)

Alloy Compositions Standard: AS2239 Aluminium (Most current revision)	Alloy: A1		Alloy: A6	
	Min	Max	Min	Max
Zinc	2.1	2.7	2.0	6.0
Indium	0.017	0.025	0.01	0.02
Cadmium	0.008	0.012	—	0.005
Silicon	—	0.20	0.08	0.12
Iron	—	0.12	—	0.12
Magnesium	—	0.02	—	0.02
Titanium	—	0.02	—	0.02
Copper	—	0.006	—	0.006
Tin	—	0.02	—	0.02
Other Impurities	- Each	0.02	- Each	0.02
Aluminium	- Total remainder	0.05	- Total remainder	0.05

Rev	Details of Change(s)	Date	Drawn	Verified
1	For Manufacture	24 Feb 2017	R.N.	R.G.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
1.05	1.3

CAA
Cathodic Anodes Australasia
cathodicanodes.com.au

Product Aluminium Anode	
Part no. CDA-1.3S	Scale 1 : 1.75
Drawing No: CD2358	Rev 1 Sheet 1 of 1
Drawn by: R Northey	Date: 24 FEB 2017
Mould No:	Strap Sample: N/A

4

3

2

1