
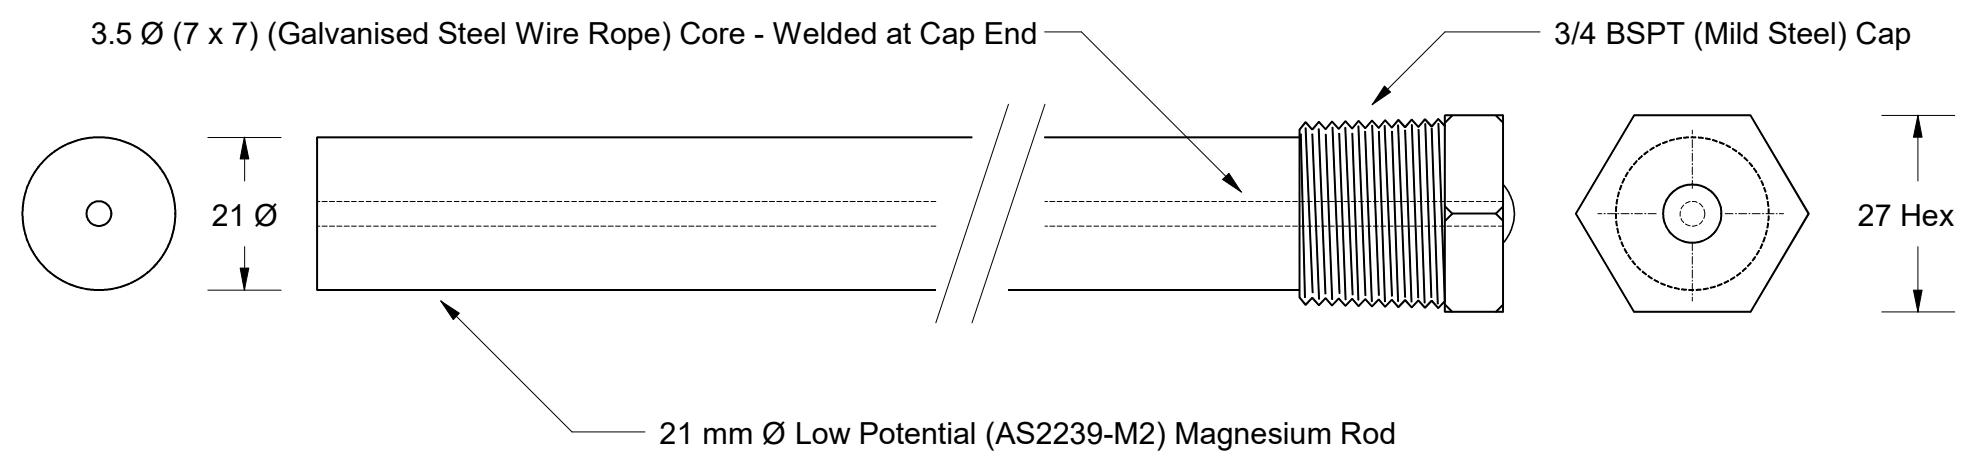


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.

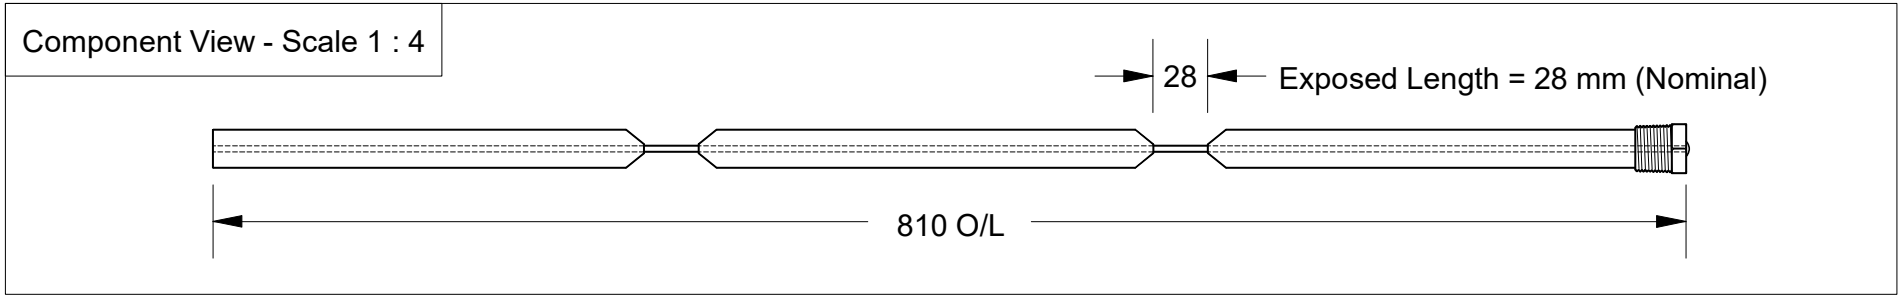

Chemical Composition Limits		Alloy:	
Element	min.	max.	M2
Standard: AS2239 (Most current revision)			
Magnesium. Low Potential			
Aluminium	2.5	3.5	
Zinc	0.7	1.3	
Manganese	0.20	1.5	
Silicon	-	0.05	
Copper	-	0.006	
Iron	-	0.003	
Nickel	-	0.001	
Calcium	-	0.04	
Other Impurities			
- each	-	-	
- total	-	0.30	
Magnesium	remainder		

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications

Rev	Details of Change(s)	Nett Weight		Gross Weight	
		kg (nominal)	kg (nominal)	kg (nominal)	kg (nominal)
		0.584	0.534		
1	2013 Catalogue Version	18 JAN 18	R.N.	18 JAN 18	R.G.
2	Exposed (Steel Core) Length Shown = 28 mm	04 APR 19	R.N.	04 APR 19	L.S.

CAA
Cathodic Anodes Australasia

cathodicanodes.com.au

Product		Magnesium Anode	
Part no.	Scale		
CDMR-M2-21-0810-F3	NTS		
Drawing No:	Rev	Sheet	
CD2369	2	1 of 1	
Drawn by: R Northey		Date: 04 APR 2019	
All dimensions are in mm (nominal)			