
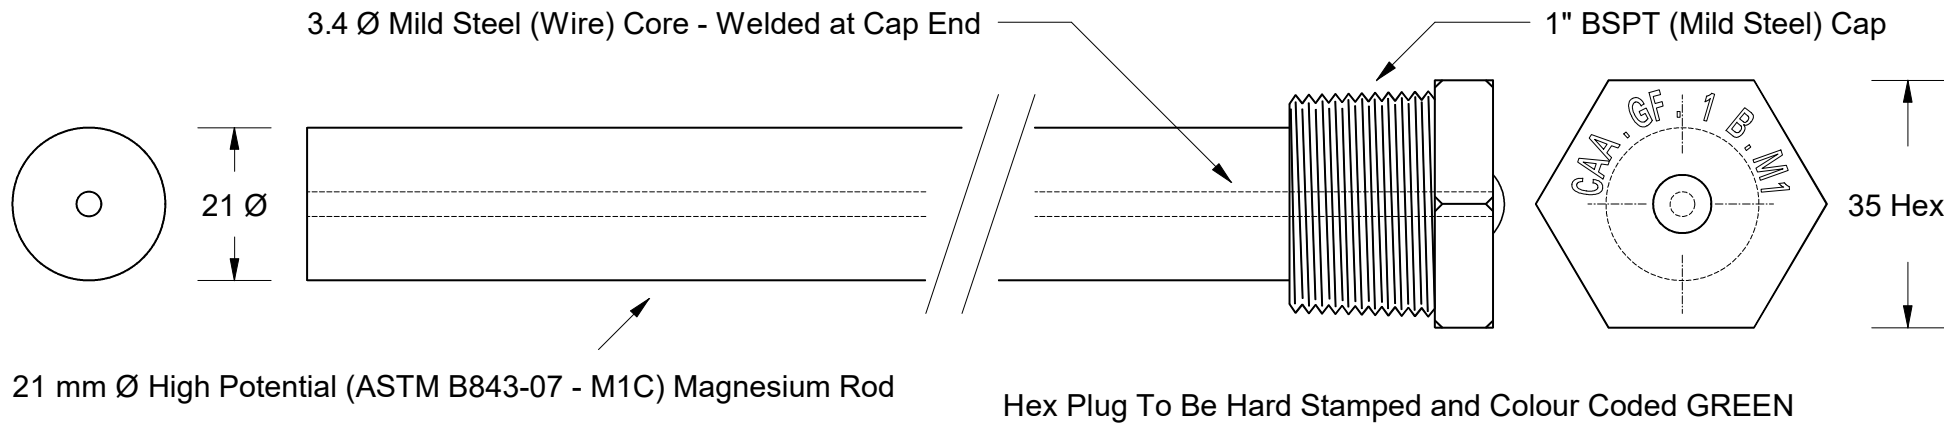


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.

Component View - Scale 1 : 4.5

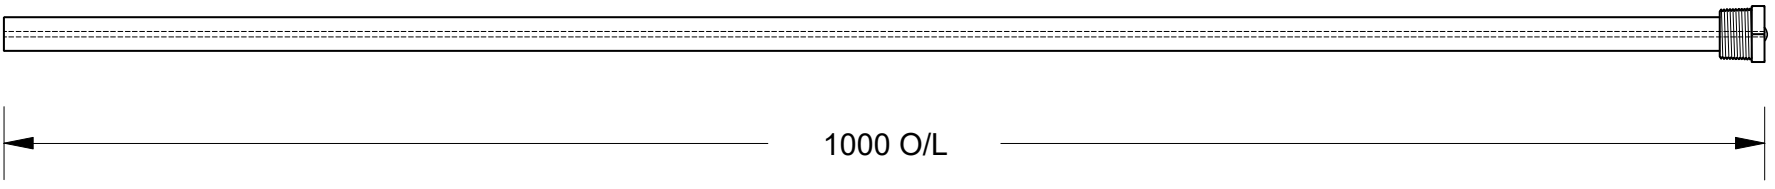

Hex Plug To Be Hard Stamped and Colour Coded GREEN

Note: Caps to be Chemically Blackened

Chemical Composition Limits			Alloy:
Standard: ASTM B843 (Most current revision)			M1C
Magnesium. High Potential			
Element	min.	max.	
Aluminium	-	0.01	
Zinc	-	0.02	
Manganese	0.50	1.3*	
Silicon	-	0.05	
Copper	-	0.02	
Iron	-	0.03	
Nickel	-	0.001	
Calcium	-	0.04	
Other Impurities			
- each	-	0.05	
- total	-	0.30	
Magnesium	remainder		

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications

Rev	Details of Change(s)	Nett Weight		Gross Weight	
		kg (nominal)		kg (nominal)	
		0.741		0.791	
1	For Quotation	13 JUN 17	R.N.	13 JUN 17	R.G.
2	Stamping And Painting Added To Head	08 MAY 20	R.N.	08 MAY 20	L.S.
3	Stamping Modified, Blackened Finish Noted	25 JUN 20	R.N.	25 JUN 20	L.S.

CAA
Cathodic Anodes Australasia
cathodicanodes.com.au

Product		Magnesium Anode	
Part no.	Scale	Rev	Sheet
CDMR-M1-21-1000-A (1" BSPT)	N T S	3	1 of 1
Drawing No: CD2395		Drawn by: R Northey Date: 25 JUN 2020	
All dimensions are in mm (nominal)			