This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
This drawing becomes an uncontrolled document once issued as hard or electronic copy.
Customer to confirm current revision of drawing prior to ordering.

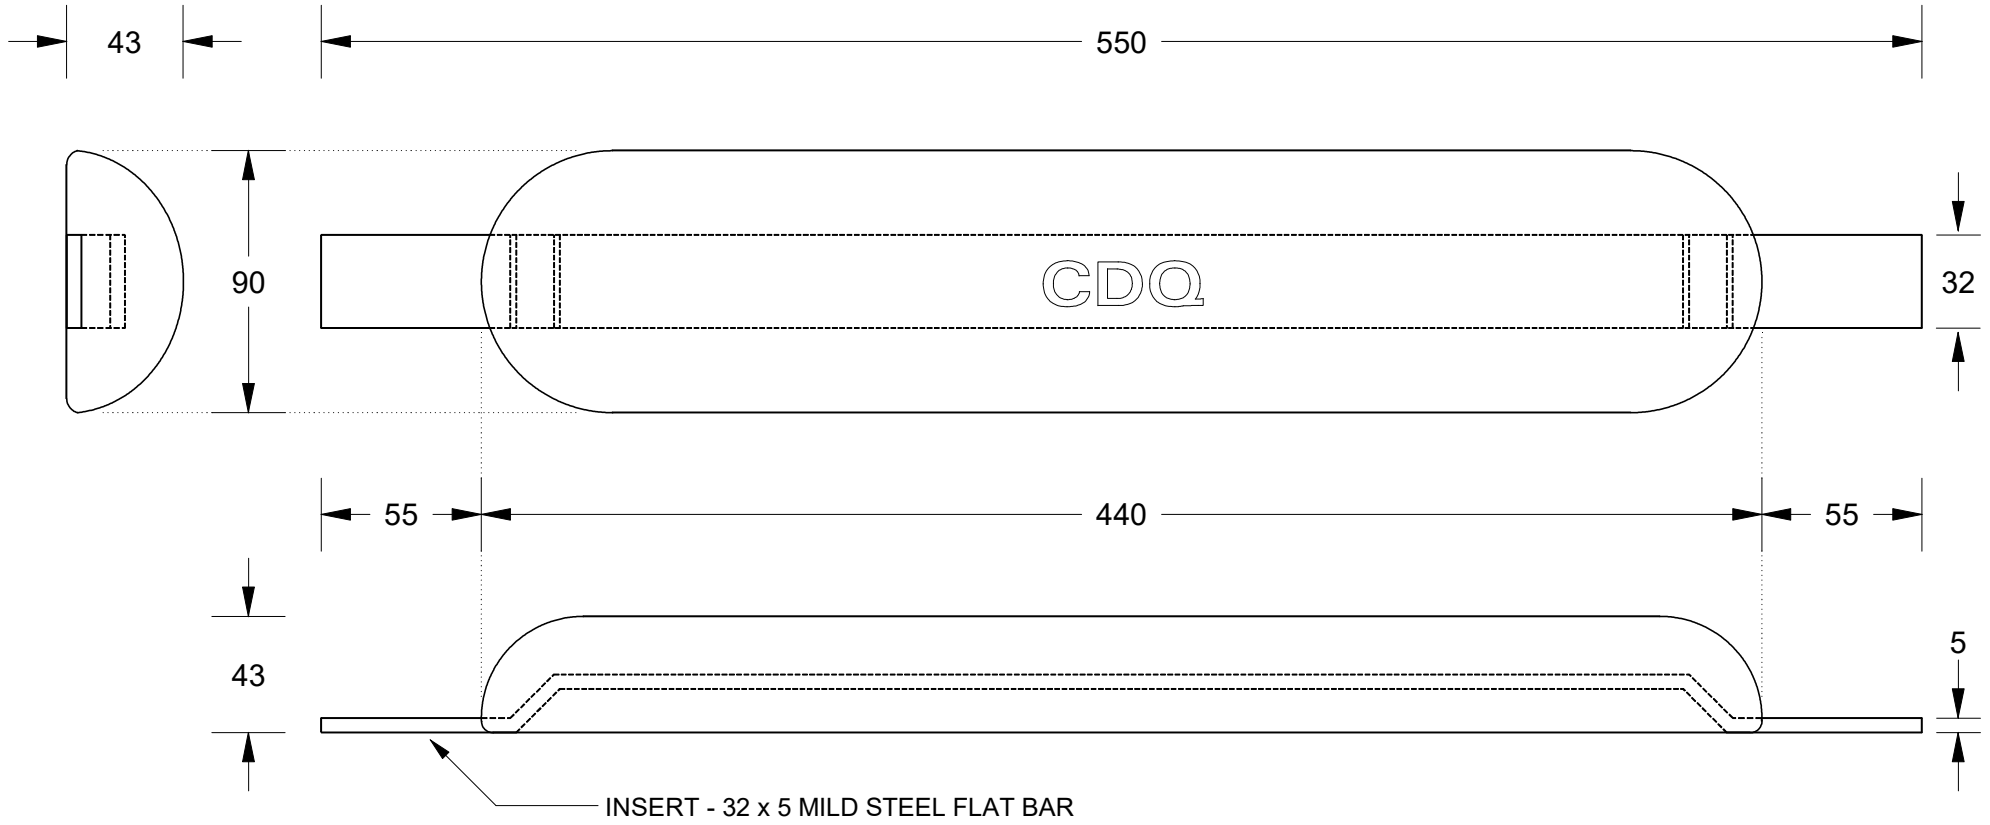

CDQ
CAST INDENTATION LETTERING

Alloy Compositions Standard: AS2239 Aluminium (Most current revision)	Alloy: A1		Alloy: A6	
Element	Min	Max	Min	Max
Zinc	2.1	2.7	2.0	6.0
Indium	0.017	0.025	0.01	0.02
Cadmium	0.008	0.012	—	0.005
Silicon	—	0.20	0.08	0.12
Iron	—	0.12	—	0.12
Magnesium	—	0.02	—	0.02
Titanium	—	0.02	—	0.02
Copper	—	0.006	—	0.006
Tin	—	0.02	—	0.02
Other Impurities	- Each	0.02	- Each	0.02
	- Total	0.05	- Total	0.05
Aluminium	remainder		remainder	

Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications

AUSTRALIAN MADE

All dimensions are in mm (nominal)

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
3.00	**3.70**

Rev	Details of Change(s)	Date	Drawn	Verified
1	2019 Catalogue Version	23 APR 19	*R.N.*	*R.G.*

CAA
Cathodic Anodes Australasia
cathodicanodes.com.au

Product
Aluminium Anode

Part no.
CDA8-18S

Scale
1 : 2.5

Drawing No: **CD2490**

Rev **1**

Sheet **1 of 1**

Drawn by: R Northey Date: 23 APR 2019

Mould No: 100 Strap Sample 30