
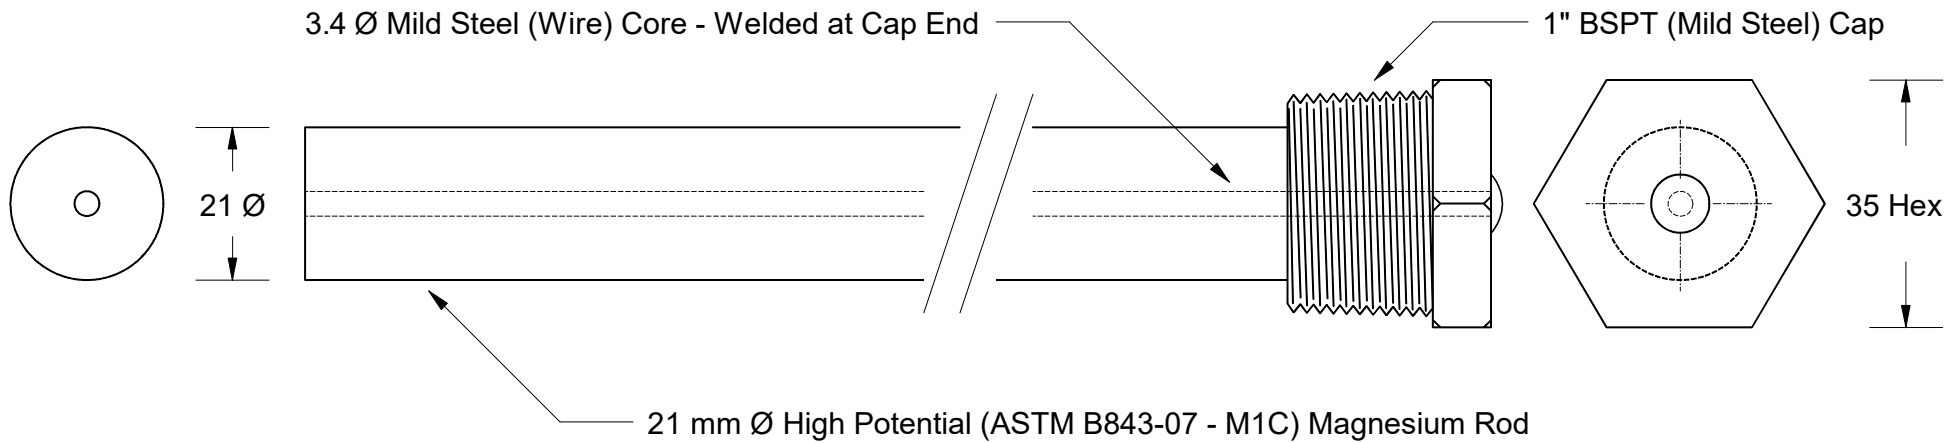


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

Component View - Scale 1 : 5

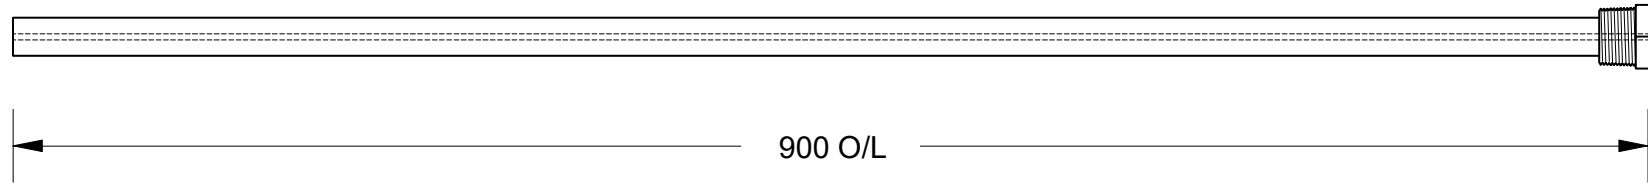


Chemical Composition Limits			Alloy:
Standard: ASTM B843 (Most current revision)			M1C
Magnesium, High Potential			
Element	min.	max.	
Aluminium	-	0.01	
Zinc	-	0.02	
Manganese	0.50	1.3*	
Silicon	-	0.05	
Copper	-	0.02	
Iron	-	0.03	
Nickel	-	0.001	
Calcium	-	0.04	
Other Impurities			
- each	-	0.05	
- total	-	0.30	
Magnesium	remainder		

Notes

- Anodes are cast to comply with CAA's standard casting tolerances
- All sharp edges removed for safe handling
- Anode insert material to meet relevant Australian/International specifications

Rev	Details of Change(s)	Drawn	Initials	Verified	Initials
1	For Quotation	24 APR 19	R.N.	24 APR 19	R.G.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
0.670	0.720



Cathodic Anodes Australasia

cathodicanodes.com.au

Product		Magnesium Anode	
Part no.	Scale	N T S	
CDMR-M1-21-0900-A (1" BSPT)			
Drawing No: CD2491	Rev	Sheet	
	1	1 of 1	
Drawn by: R Northey Date: 24 APR 19			
All dimensions are in mm (nominal)			

