

COMBINATION SET - Individual Components Shown At Top - Plug Material: DEZINCIFICATION RESISTANT BRASS


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
This drawing becomes an uncontrolled document once issued as hard or electronic copy.
Customer to confirm current revision of drawing prior to ordering.

Zinc Anode Only - CAA Part No: CDZ9-214 (Drawing No: CD2572)




3/8 UNC


D.R. Brass Plug 06 (BP06)




3/8 NPT



58





13 Ø

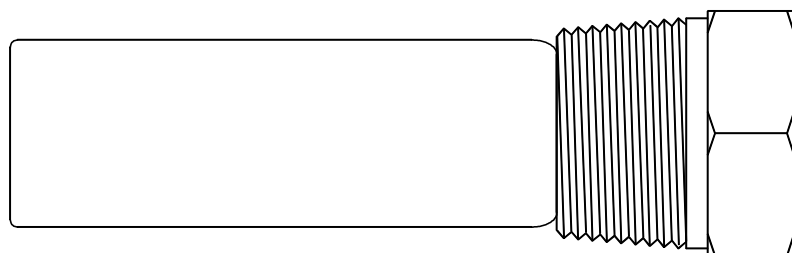

38

14

6



17



= Australian Made Logo

NO SHARP EDGES

All dimensions are in mm (nominal)

Chemical Composition Limits		Alloy:
Standard: AS2239* (Most current revision)		Z1
Zinc		
Element	min.	max.
Cadmium	0.025	0.07
Aluminium	0.10	0.50
Silicon	-	0.005
Copper	-	0.005
Iron	-	0.005
Lead	-	0.006
Other Impurities		
- each	-	0.005
- total	-	0.02
Zinc	remainder	

* Corresponds to MIL-DTL-18001L alloy composition

Notes

1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Drawn	Verified
1	For Manufacture	08 June 2020	R.N.	R.G.
2	Stamping & Logo added to DR Brass Plug	10 Nov 2020	R.N.	R.G.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
0.030	0.060



Cathodic Anodes Australasia

cathodicanodes.com.au

Product	
Zinc Anode & DR Brass Plug	
Part no. CDZ9-213	Scale 2:1
Drawing No: CD2571	Rev 2
Sheet 1 of 1	
Drawn by: R Northey	Date: 10 NOV 2020

