


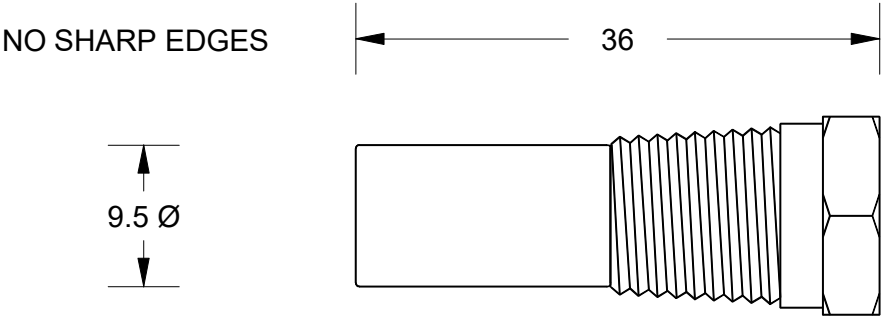


4 3 2 1  
**COMBINATION SET - Individual Components Shown At Top - Plug Material: DEZINCIFICATION RESISTANT BRASS**

This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.  
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.  
 Customer to confirm current revision of drawing prior to ordering.

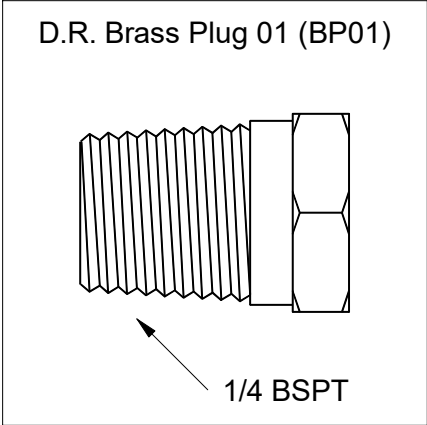

To Suit: ZF Transmission Oil Cooler  
 Replaces Genuine P/No: 3311301055

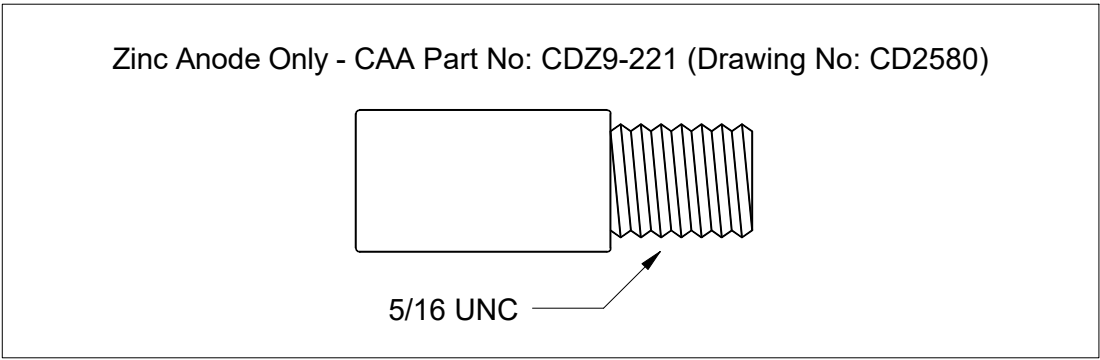

**NO SHARP EDGES**  
 Logo = Australian Made Logo

All dimensions are in mm (nominal)

Chemical Composition Limits			Alloy: <b>Z1</b>
Standard: AS2239* (Most current revision)	min.	max.	
<b>Zinc</b>			
Element	min.	max.	
Cadmium	0.025	0.07	
Aluminium	0.10	0.50	
Silicon	-	0.005	
Copper	-	0.005	
Iron	-	0.005	
Lead	-	0.006	
Other Impurities			
- each	-	0.005	
- total	-	0.02	
Zinc		remainder	

- Notes**
- Anodes are cast to comply with CAA's standard casting tolerances
  - All sharp edges removed for safe handling
  - Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Nett Weight		Gross Weight	
			Kg (nominal)	0.010	Kg (nominal)	0.025
1	For Manufacture	08 Jun 2020	R.N.	R.G.		
2	Stamping & Logo added to DR Brass Plug	10 Nov 2020	R.N.	R.G.		

**CAA**  
 Cathodic Anodes Australasia  
 cathodicanodes.com.au

Product <b>Zinc Anode &amp; DR Brass Plug</b>			
Part no. <b>CDZ9-220</b>		Scale <b>2 : 1</b>	
Drawing No: <b>CD2579</b>		Rev <b>2</b>	Sheet <b>1 of 1</b>
Drawn by: R Northey		Date: 10 NOV 2020	

\* Corresponds to MIL-DTL-18001L alloy composition