


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

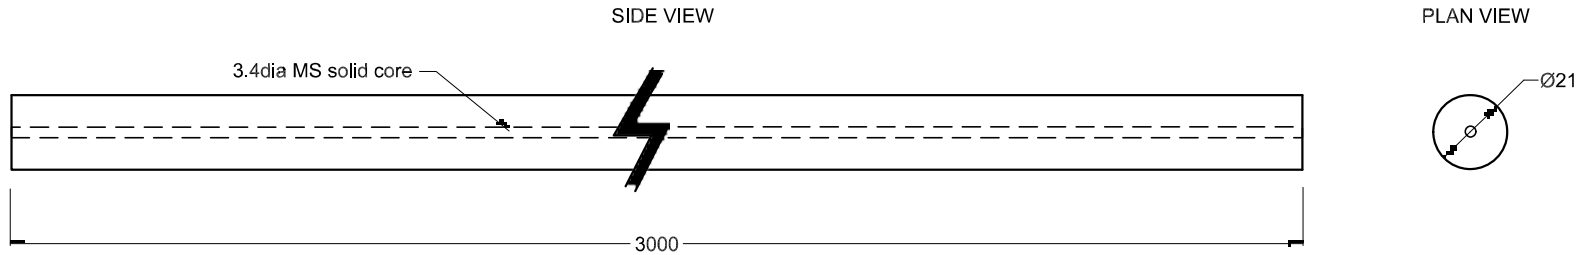

Note: One End To Be Painted GREEN

Chemical Composition Limits		Alloy:
Standard: ASTM B843 (Most current revision)		M1C
Magnesium, High Potential		
Element	min.	max.
Aluminium	-	0.01
Zinc	-	0.02
Manganese	0.50	1.3*
Silicon	-	0.05
Copper	-	0.02
Iron	-	0.03
Nickel	-	0.001
Calcium	-	0.04
Other Impurities		
- each	-	0.05
- total	-	0.30
Magnesium	remainder	

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications

Rev	Details of Change(s)	Date	Initials
1	For manufacture	14JUL09	BL
2	Steel core detail revised	15JUL09	BL
3	M1C Specification & CAA Logo	23JAN18	R.N.

CAA
 Cathodic Anodes Australasia
 cathodicanodes.com.au

Product		Magnesium Anode	
Part no.	CDMR-M1-21-3000B	Scale	1 to 2
Drawing no.	CD1228	Rev	3
Drawn by: BL	Date: 15JUL09	Sheet	1 of 1
All dimensions are in mm (nominal)			