



This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.


PLAN VIEW



SIDE VIEW

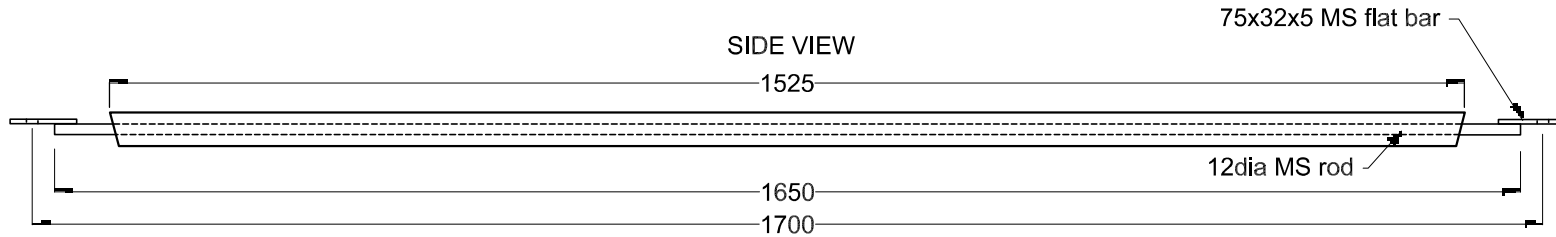

END VIEW




Chemical Composition Limits		Alloy:
Standard: AS2239* (Most current revision)		Z1
Zinc		
Element	min.	max.
Cadmium	0.025	0.07
Aluminium	0.10	0.50
Silicon	-	0.005
Copper	-	0.005
Iron	-	0.005
Lead	-	0.006
Other Impurities		
- each	-	0.005
- total	-	0.02
Zinc	remainder	

Notes

- Anodes are cast to comply with CAA's standard casting tolerances
- All sharp edges removed for safe handling
- Anode insert material to meet relevant Australian/International specifications



Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
12.5	14.2



Product Zinc Anode		Scale 1 to 8
Part no. CDZ8-60S 14kg Xstrata		Rev Sheet 2 1 of 1
Drawing no. CD1254		Drawn by: BL Date: 09MAR11
Mould no: 7	All dimensions are in mm (nominal)	

Rev	Details of Change(s)	Date	Initials
2	Modified base width + weight	09MAR11	BL
1	For manufacture	25AUG09	BL

* Corresponds to MIL-DTL-18001L alloy composition