
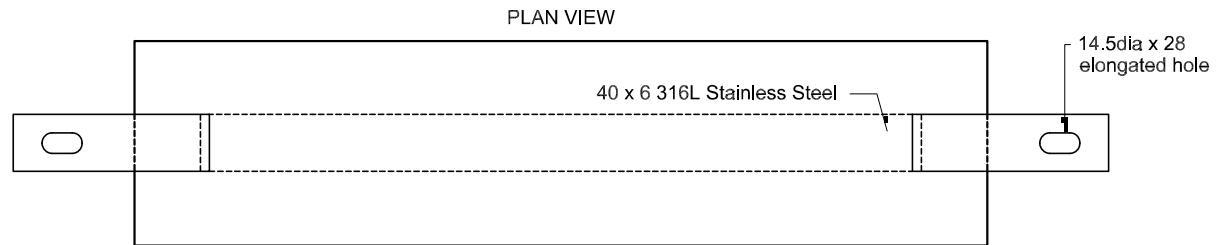
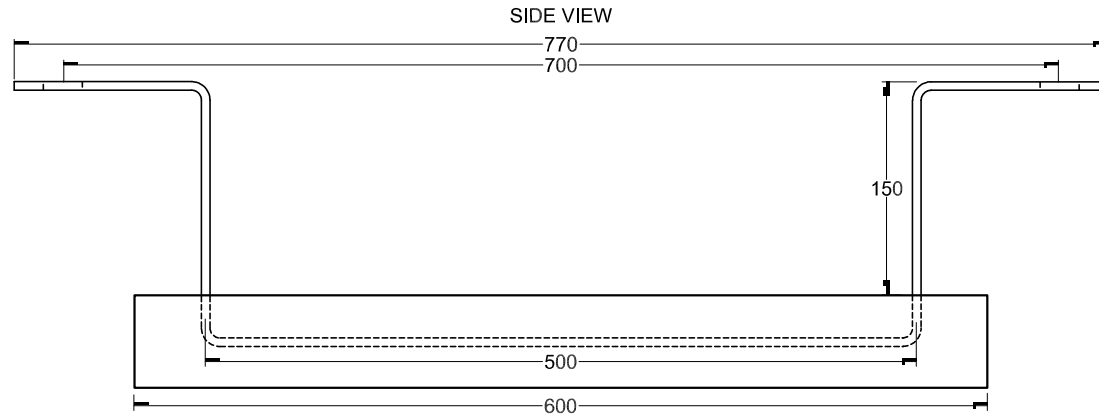


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.  
 This drawing becomes an uncontrolled document once Issued as hard or electronic copy.  
 Customer to confirm current revision of drawing prior to ordering.

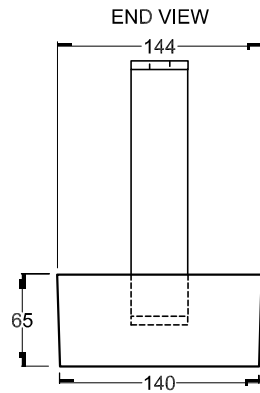

**Notes**


1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications

Chemical Composition Limits		Alloy:
Element	min.	max.
Standard: AS2239 (Most current revision)		<b>A1</b>
Aluminium		
Element	min.	max.
Zinc	2.1	2.7
Indium	0.017	0.025
Cadmium	0.008	0.012
Silicon	-	0.20
Iron	-	0.12
Copper	-	0.006
Other Impurities		
- each	-	0.02
- total	-	0.05
Aluminium	remainder	



All dimensions are in mm (nominal)

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
<b>14.4</b>	<b>16.6</b>



[cathodicanodes.com.au](http://cathodicanodes.com.au)

Product <b>Aluminium Anode</b>		Scale <b>1 to 5</b>
Part no. <b>CDA-15S Type 1 Stand-off</b>		Rev Sheet <b>1 1 of 1</b>
Drawing no. <b>CD1809</b>		Rev Sheet <b>1 1 of 1</b>
Drawn by: BL Verified by: JL Date: 07JUL16		Mould no: 8

Rev	Details of Change(s)	Date	Drawn	Verified
1	For manufacture	07JUL16	BL	JL