
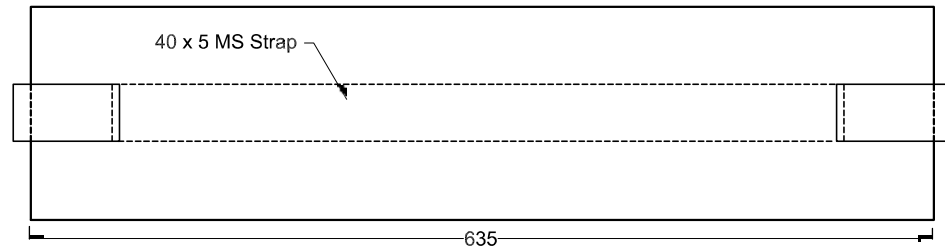
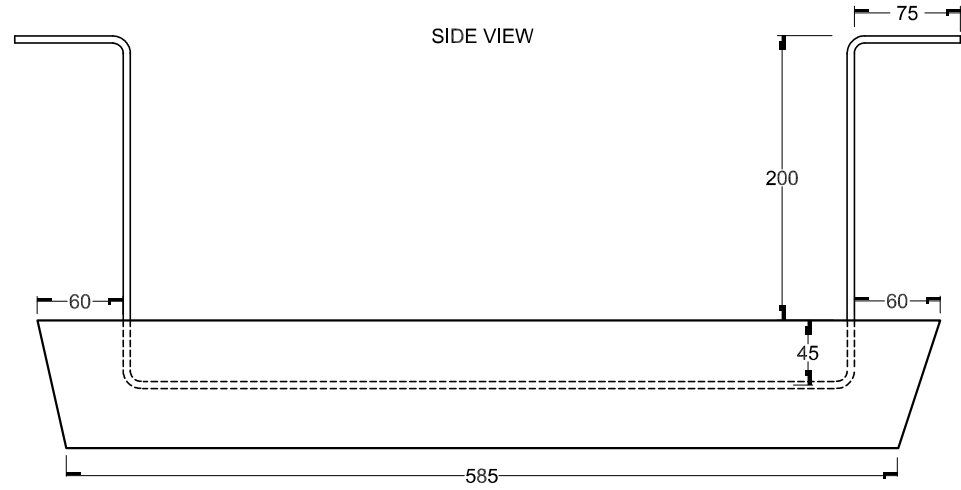


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.

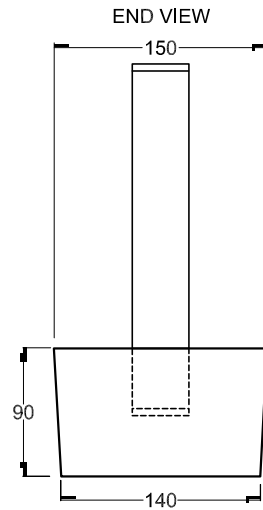

**Notes**


1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications

Chemical Composition Limits		Alloy:	
Standard: AS2239 (Most current revision)		<b>A6</b>	
Aluminium			
Element	min.	max.	
Zinc	2.0	6.0	
Indium	0.01	0.02	
Cadmium	-	0.005	
Silicon	0.08	0.12	
Iron	-	0.12	
Magnesium	-	0.02	
Titanium	-	0.02	
Copper	-	0.006	
Tin	-	0.02	
Other Impurities			
- each	-	0.02	
- total	-	0.05	
Aluminium	remainder		



Rev	Details of Change(s)	Date	Drawn	Verified
1	For manufacture	11AUG20	SP	SP

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
<b>20.0</b>	<b>21.3</b>



cathodicanodes.com.au

Product <b>Aluminium Anode</b>		Scale <b>1 to 5</b>	
Part no. <b>CDA-20S Type 2 Stand-off</b>		Rev Sheet <b>1 1 of 1</b>	
Drawing no. <b>CD1920</b>		Mould no: 8	
Drawn by: BL Verified by: SP Date: 11AUG20			

All dimensions are in mm (nominal)