


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.

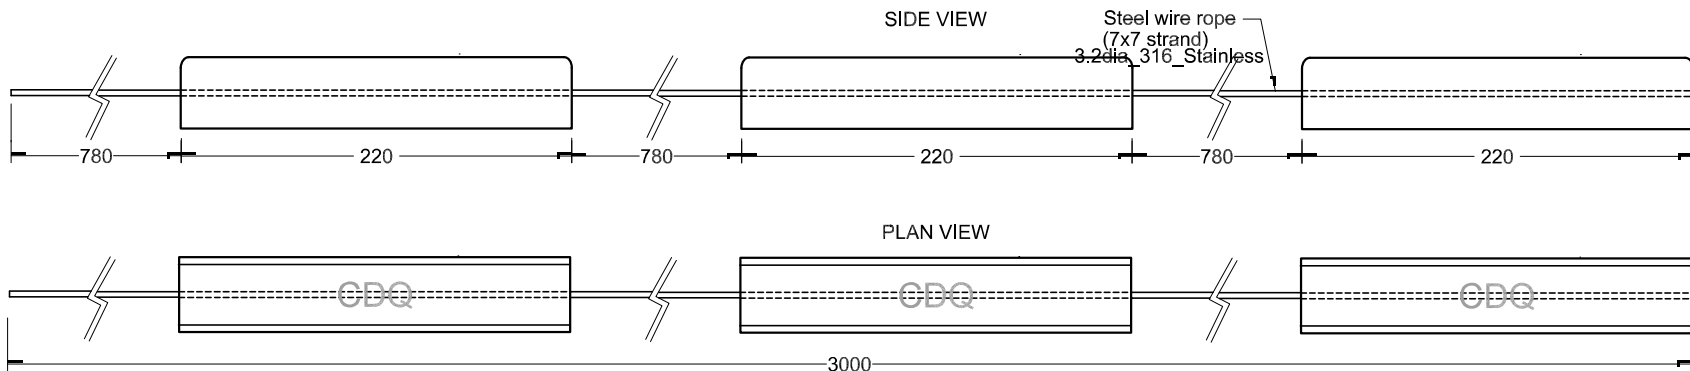

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
  2. All sharp edges removed for safe handling
  3. Anode insert material to meet relevant Australian/International specifications

Chemical Composition Limits		Alloy: <b>Z1</b>
Standard: AS2239* (Most current revision)		
Zinc		
Element	min.	max.
Cadmium	0.025	0.07
Aluminium	0.10	0.50
Silicon	-	0.005
Copper	-	0.005
Iron	-	0.005
Lead	-	0.006
Other Impurities		
- each	-	0.005
- total	-	0.02
Zinc		remainder

\* Corresponds to MIL-DTL-18001L alloy composition



Nett Weight Kg (nominal)  
**2.1 per segment**

Rev	Details of Change(s)	Date	Drawn	Verified
1	For manufacture	11FEB21	SP	

**CAA**  
Cathodic Anodes Australasia  
cathodicanodes.com.au

All dimensions are in mm (nominal)

Product <b>Zinc Anode</b>		Scale <b>1 to 4</b>	
Part no. <b>CDZ7-91515 Zinc Anode String</b>		Rev	Sheet
Drawing no. <b>CD1940</b>		<b>1</b>	<b>1 of 1</b>
Drawn by: BL Verified by: SP Date: 11FEB21			