


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.

SIDE VIEW



PLAN VIEW

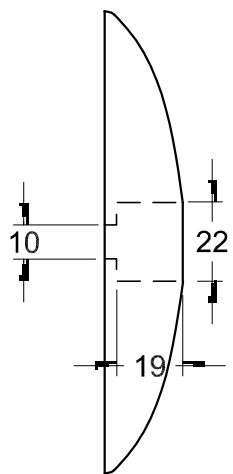

HEIGHT OF GRAPHICS  
 25mm "CAA"  
 10mm "130mm dia"  
 38mm Australian Made Logo

Chemical Composition Limits		Alloy:
Standard: AS2239* (Most current revision)		<b>Z1</b>
Zinc		
Element	min.	max.
Cadmium	0.025	0.07
Aluminium	0.10	0.50
Silicon	-	0.005
Copper	-	0.005
Iron	-	0.005
Lead	-	0.006
Other Impurities		
- each	-	0.005
- total	-	0.02
Zinc		remainder

- Notes
- Anodes are cast to comply with CAA's standard casting tolerances
  - All sharp edges removed for safe handling
  - Anode insert material to meet relevant Australian/International specifications



\* Corresponds to MIL-DTL-18001L alloy composition

All dimensions are in mm (nominal)

Gross Weight Kg (nominal)			
<b>2.15kg/pair</b>			
Rev	Details of Change(s)	Date	Drawn/Verified
1	Ne design, for discussion	29JUL21	BL RG

**CAA**  
 Cathodic Anodes Australasia  
 cathodicanodes.com.au

Product <b>Zinc Anode</b>		Scale <b>1 to 2</b>	
Part no. <b>CDZ6-130 NEW VERSION</b>		Rev	Sheet
Drawing no. <b>CD1976</b>		<b>1</b>	<b>1 of 1</b>
Drawn by: BL Verified by: RG Date: 06AUG21			