
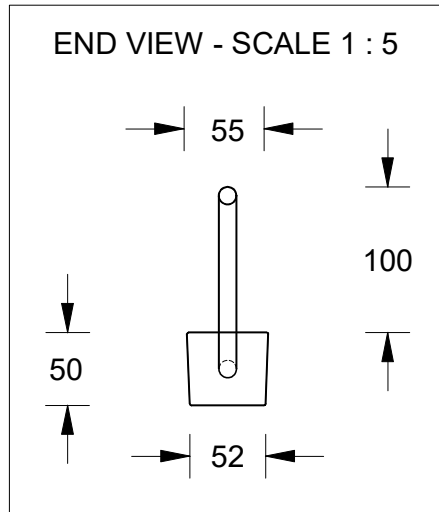


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

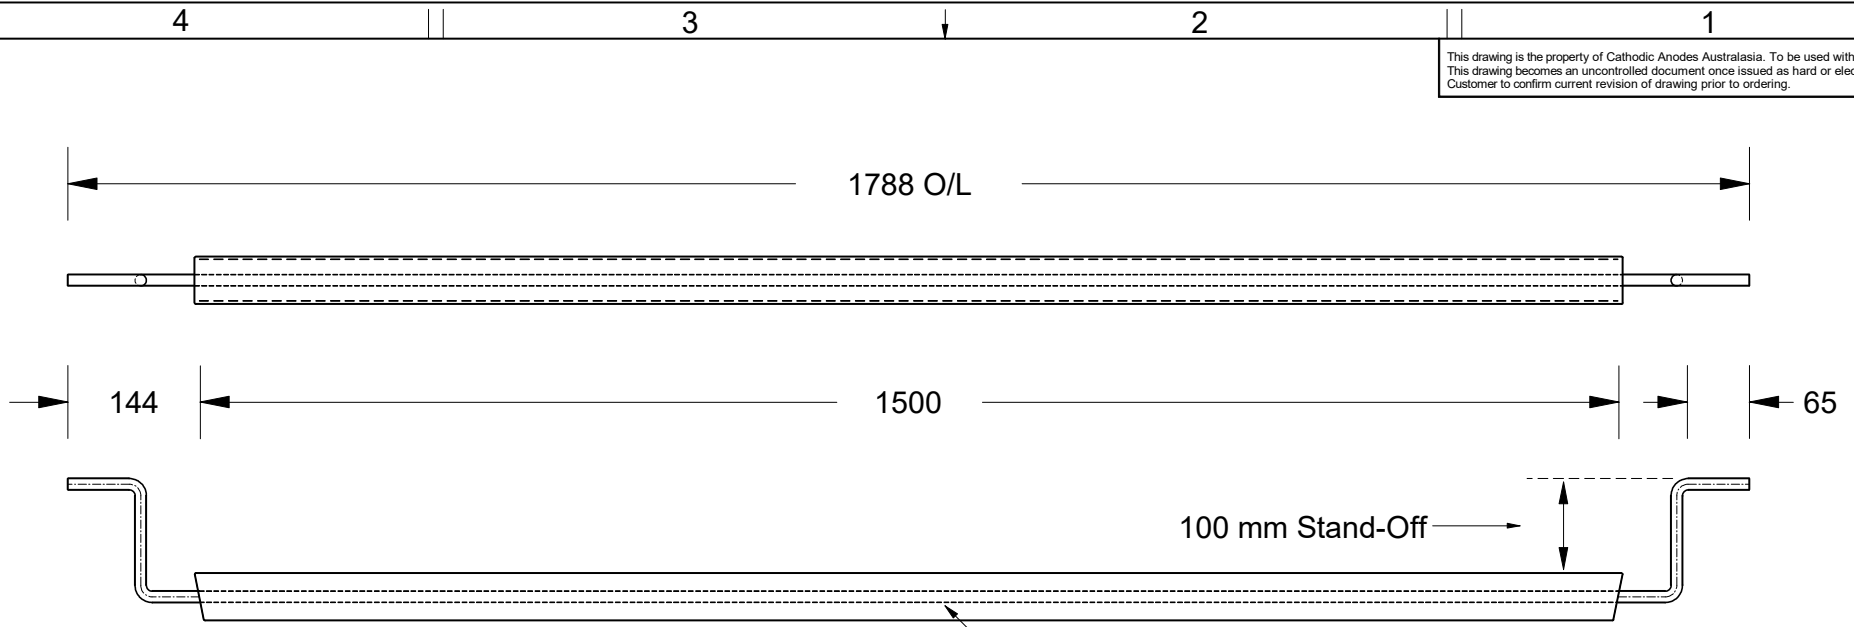

INSERT = 12 mm Ø Mild Steel Round Bar

- Notes**
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications

Chemical Composition Limits		Alloy:
Element	min.	max.
Standard: AS2239* (Most current revision)		Z1
Cadmium	0.025	0.07
Aluminium	0.10	0.50
Silicon	-	0.005
Copper	-	0.005
Iron	-	0.005
Lead	-	0.006
Other Impurities	-	-
- each	-	0.005
- total	-	0.02
Zinc	remainder	

* Corresponds to MIL-DTL-18001L alloy composition

Rev	Details of Change(s)	Date	Drawn	Verified
1	For Quotation	21 April 2016	R.N.	J.L.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
27.4	29.2



cathodicanodes.com.au

Product Zinc Anode		Scale 1 : 7.5	
Part no. CDZ8-60S 27 kg 100 Stand-Off		Rev 1	Sheet 1 of 1
Drawing No: CD2236		Drawn by: R Northey Date: 21 APR 2016	
Mould No: 6		Tooling:	



All dimensions are in mm (nominal)