


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

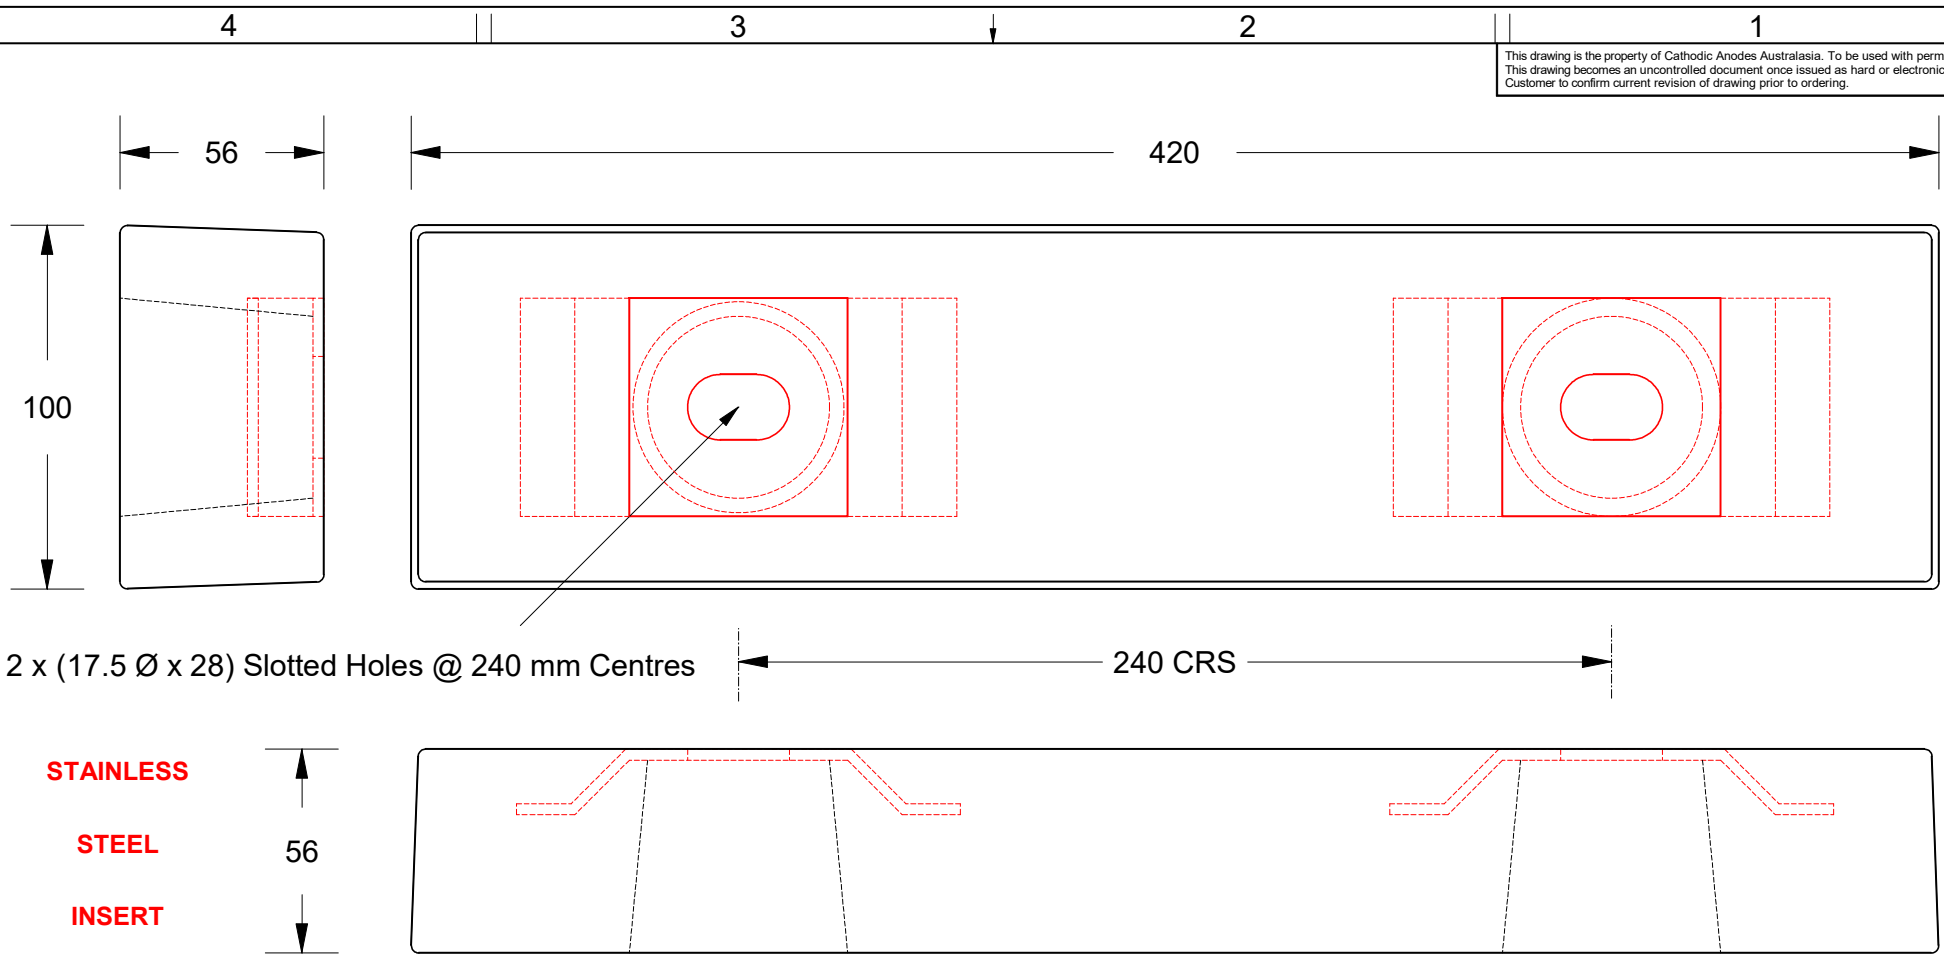

2 x (17.5 Ø x 28) Slotted Holes @ 240 mm Centres

240 CRS

STAINLESS
STEEL
INSERT

56

50 Ø

Spigots # CDZ8-126-200H Type 1 (CD3384 Rev 2)
 Last MYOB Inv # 40355 (9/5/2017)

All dimensions are in mm (nominal)

Alloy Compositions Standard: AS2239 Aluminium (Most current revision)	Alloy: A1		Alloy: A6	
	Min	Max	Min	Max
Zinc	2.1	2.7	2.0	6.0
Indium	0.017	0.025	0.01	0.02
Cadmium	0.008	0.012	—	0.005
Silicon	—	0.20	0.08	0.12
Iron	—	0.12	—	0.12
Magnesium	—	0.02	—	0.02
Titanium	—	0.02	—	0.02
Copper	—	0.006	—	0.006
Tin	—	0.02	—	0.02
Other Impurities	- Each	0.02	- Each	0.02
	- Total	0.05	- Total	0.05
Aluminium	remainder		remainder	

- Notes
- Anodes are cast to comply with CAA's standard casting tolerances
 - All sharp edges removed for safe handling
 - Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Drawn	Verified
1	For Quotation	15 May 2017	R.N.	J.L.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
5.5	5.8

CAA
 Cathodic Anodes Australasia
cathodicanodes.com.au

Product Reel Action Anode	
Part no. CDA - 420 x 100 x 56	Scale 1 : 2
Drawing No: CD2387	Rev 1 Sheet 1 of 1
Drawn by: R Northey Date: 15 MAY 2017	
Spider Mould c/w 2 x # 43 (17.5 x 28) STAINLESS	