





This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.  
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.  
 Customer to confirm current revision of drawing prior to ordering.

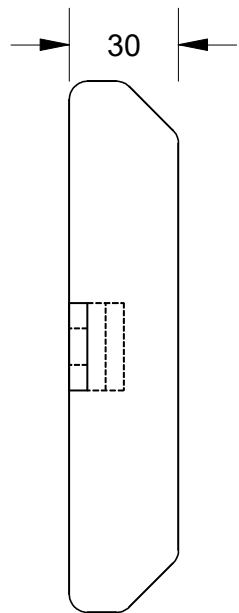

**CDQ**  
 CAST  
 INDENTATION  
 LETTERING

Chemical Composition Limits		Alloy:
Element	min.	max.
Standard: AS2239* (Most current revision)		
Zinc		<b>Z1</b>
Cadmium	0.025	0.07
Aluminium	0.10	0.50
Silicon	-	0.005
Copper	-	0.005
Iron	-	0.005
Lead	-	0.006
Other Impurities		
- each	-	0.005
- total	-	0.02
Zinc	remainder	

\* Corresponds to MIL-DTL-18001L alloy composition

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
  2. All sharp edges removed for safe handling
  3. Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Drawn	Verified
1	For Quotation	11 December 2017	R.N.	J.L.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
<b>5.00</b>	<b>5.00</b>

**CAA**  
 Cathodic Anodes Australasia  
 cathodicanodes.com.au

Product <b>Zinc Anode</b>	
Part no. <b>CDZ8-86 Plain Block</b>	Scale <b>1 : 2</b>
Drawing No: <b>CD2420</b>	Rev <b>1</b> Sheet <b>1 of 1</b>
Drawn by: R Northey	Date: 11 DEC 2017
Mould No: 102	Strap Sample: N/A

All dimensions are in mm (nominal)