


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.

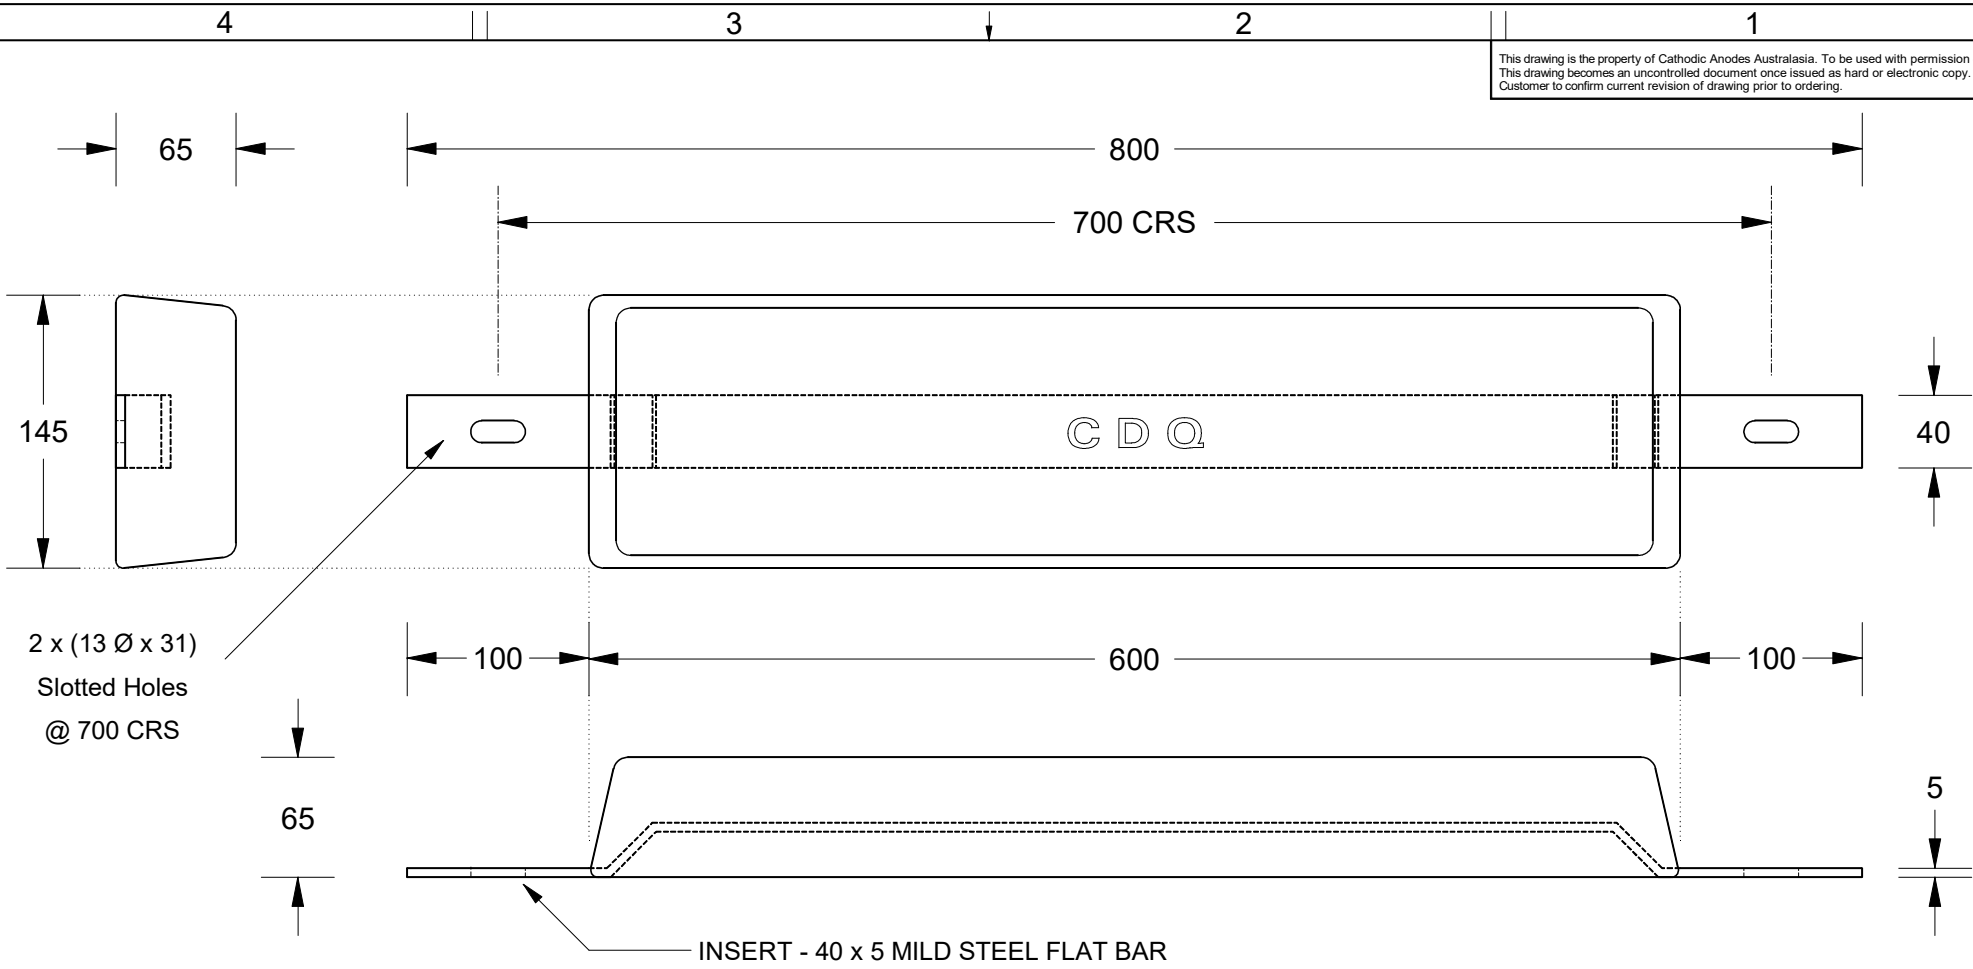

2 x (13 Ø x 31)  
Slotted Holes  
@ 700 CRS

INSERT - 40 x 5 MILD STEEL FLAT BAR

C D Q  
CAST INDENTATION LETTERING

Chemical Composition Limits		Alloy:
Element	min.	max.
Standard: AS2239 (Most current revision)		
Aluminium		
<b>A2</b>		
Zinc	3.0	5.0
Indium	0.02	0.05
Cadmium	-	0.005
Silicon	-	0.20
Iron	-	0.12
Magnesium	0.6	2.2
Titanium	0.02	0.05
Copper	-	0.006
Other Impurities		
- each	-	0.02
- total	-	0.05
Aluminium	remainder	

Notes

1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Drawn	Verified
1	For Quotation	17 JAN 2018	R.N.	J.L.

  
**Cathodic Anodes Australasia**  
[cathodicanodes.com.au](http://cathodicanodes.com.au)

Product		Aluminium Anode	
Part no.	CDA-15S Type 2 (A2)	Scale	1 : 4
Drawing No:	CD2431	Rev	1
		Sheet	1 of 1
Drawn by:	R Northey	Date:	17 JAN 2018
Mould No:	8	Strap Sample:	08

All dimensions are in mm (nominal)