


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.  
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.  
 Customer to confirm current revision of drawing prior to ordering.

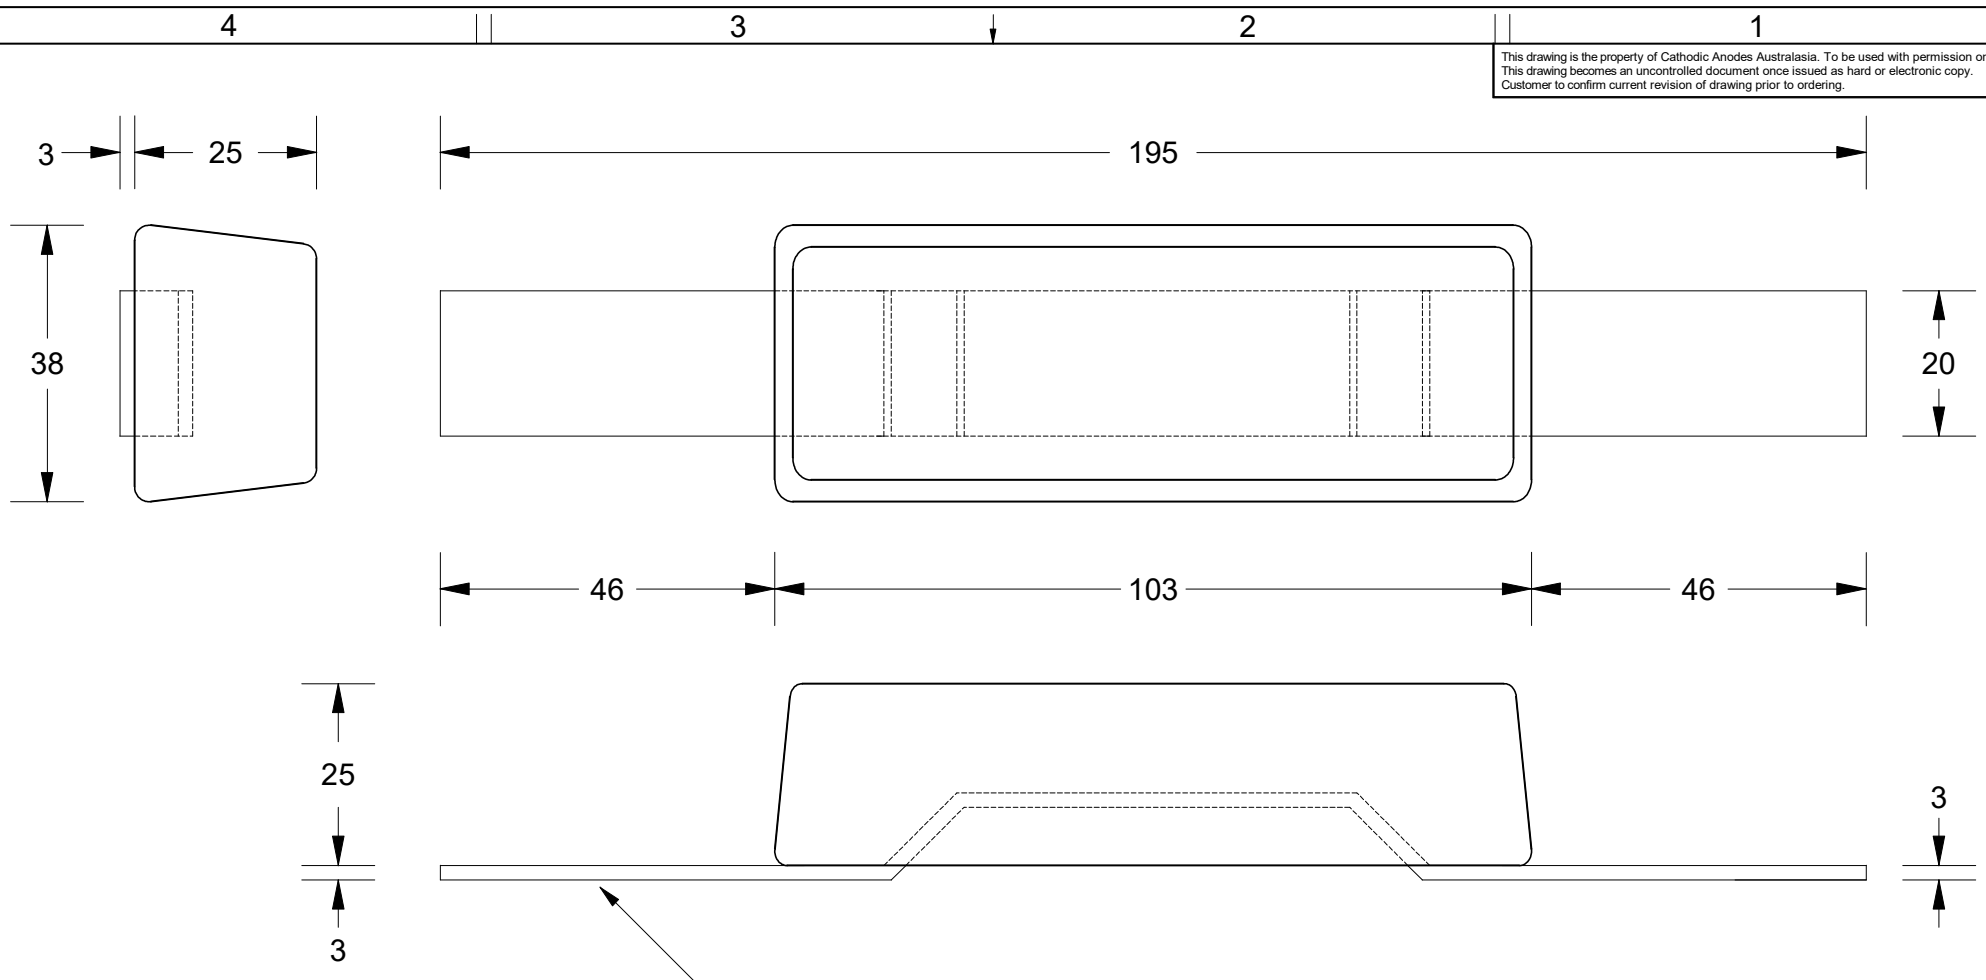

**20 x 3 MILD STEEL INSERT STRAP**

Chemical Composition Limits			Alloy: <b>Z1</b>
Element	min.	max.	
Standard: AS2239* (Most current revision)			
Zinc			
Cadmium	0.025	0.07	
Aluminium	0.10	0.50	
Silicon	-	0.005	
Copper	-	0.005	
Iron	-	0.005	
Lead	-	0.006	
Other Impurities	-	-	
- each	-	0.005	
- total	-	0.02	
Zinc	remainder		

\* Corresponds to MIL-DTL-18001L alloy composition

- Notes
- Anodes are cast to comply with CAA's standard casting tolerances
  - All sharp edges removed for safe handling
  - Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Nett Weight	Gross Weight	
		Kg (nominal)	Kg (nominal)	
		<b>630g</b>	<b>700g</b>	
		Date	Drawn	Verified
1	For Quotation	16 NOV 2018	R.N.	R.G.

**CAA**  
Cathodic Anodes Australasia  
cathodicanodes.com.au

Product		
<b>Zinc Anode</b>		
Part no.	Scale	
<b>CDZ2-415-1S Mild Steel Strap</b>	<b>1 : 1</b>	
Drawing No: <b>CD2478</b>	Rev	Sheet
	<b>1</b>	<b>1 of 1</b>
Drawn by: R Northey	Date: 16 NOV 2018	
Mould No: 54	Strap Sample 17 (Black)	

All dimensions are in mm (nominal)