


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

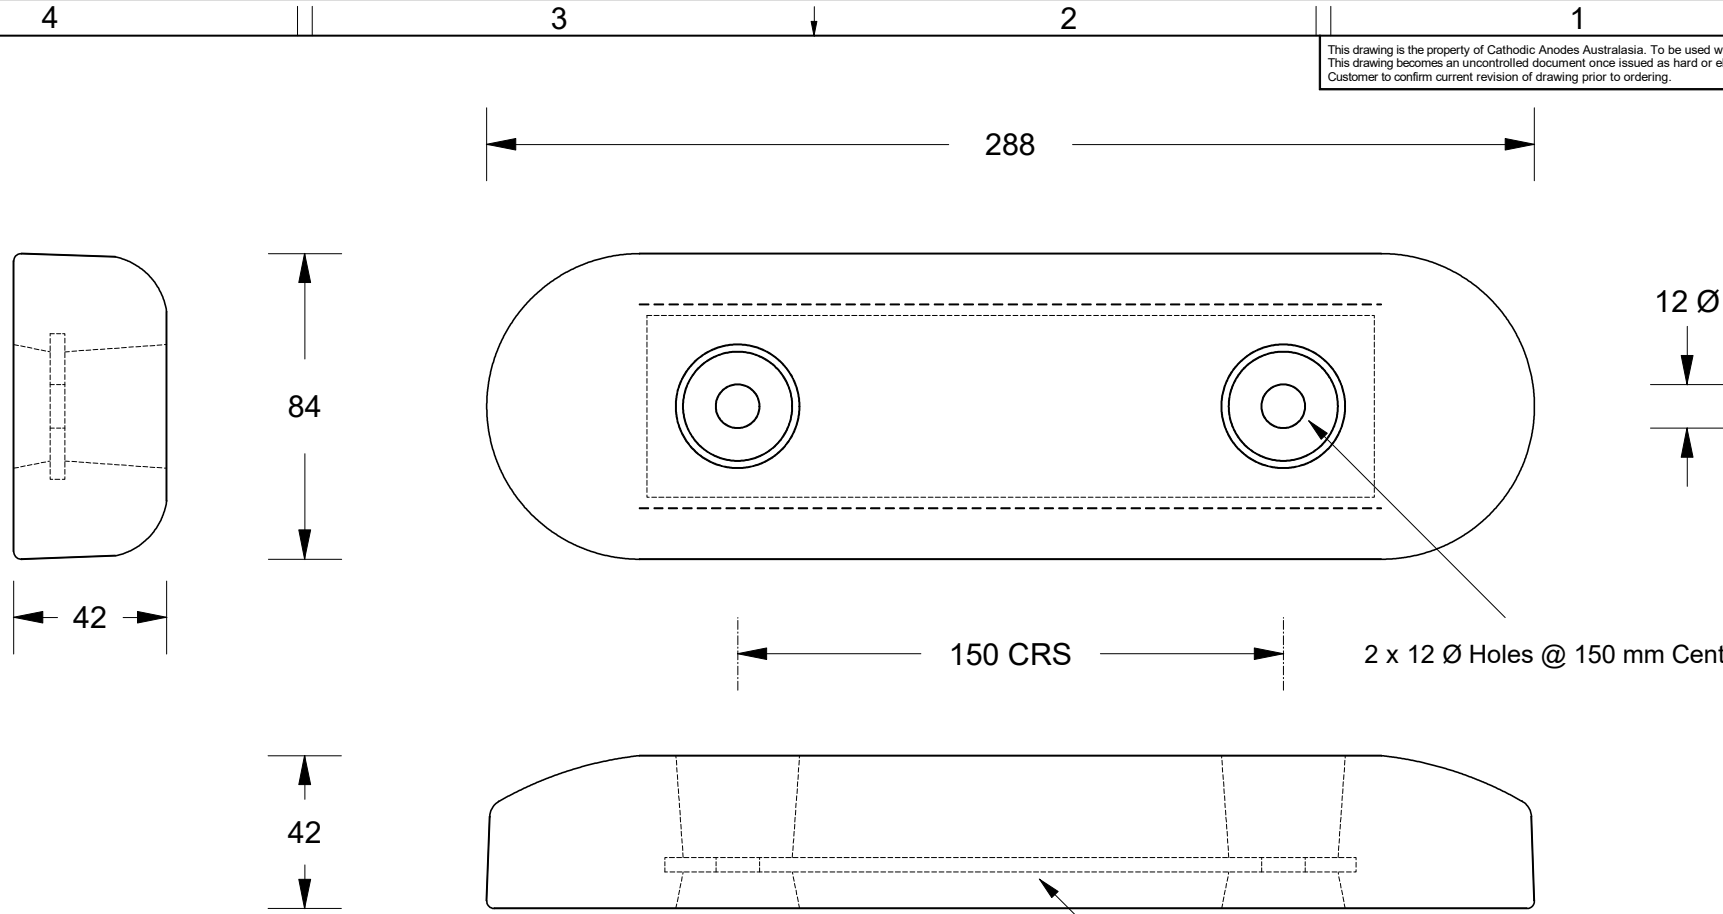

2 x 12 Ø Holes @ 150 mm Centres

Insert: 50 x 4 Galvanised Steel

All dimensions are in mm (nominal)

| Chemical Composition Limits | | Alloy: |
|---|-------|-----------|
| Standard: AS2239* (Most current revision) | | Z1 |
| Element | min. | max. |
| Zinc | | |
| Cadmium | 0.025 | 0.07 |
| Aluminium | 0.10 | 0.50 |
| Silicon | - | 0.005 |
| Copper | - | 0.005 |
| Iron | - | 0.005 |
| Lead | - | 0.006 |
| Other Impurities | | |
| - each | - | 0.005 |
| - total | - | 0.02 |
| Zinc | | remainder |

* Corresponds to MIL-DTL-18001L alloy composition

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications



| Rev | Details of Change(s) | Nett Weight | Gross Weight | |
|-----|----------------------|------------------|--------------|----------|
| | | Kg (nominal) | Kg (nominal) | |
| | | 5.20 | 5.40 | |
| 1 | For Manufacture | Date | Drawn | Verified |
| | | 18 November 2019 | R.N. | L.S. |
| | | | | |
| | | | | |

CAA
Cathodic Anodes Australasia

cathodicanodes.com.au

| | | | |
|---------------------|---|-------------------|---------------|
| Product | | Zinc Anode | |
| Part no. | R&L Recessed Zinc Anode Type 2 | Scale | 1 : 2 |
| Drawing No: | CD2532 | Rev | Sheet |
| | | 1 | 1 of 1 |
| Drawn by: R Northey | Date: 18 NOV 2019 | | |
| Mould No: | Tooling: | | |