



This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.  
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.  
 Customer to confirm current revision of drawing prior to ordering.

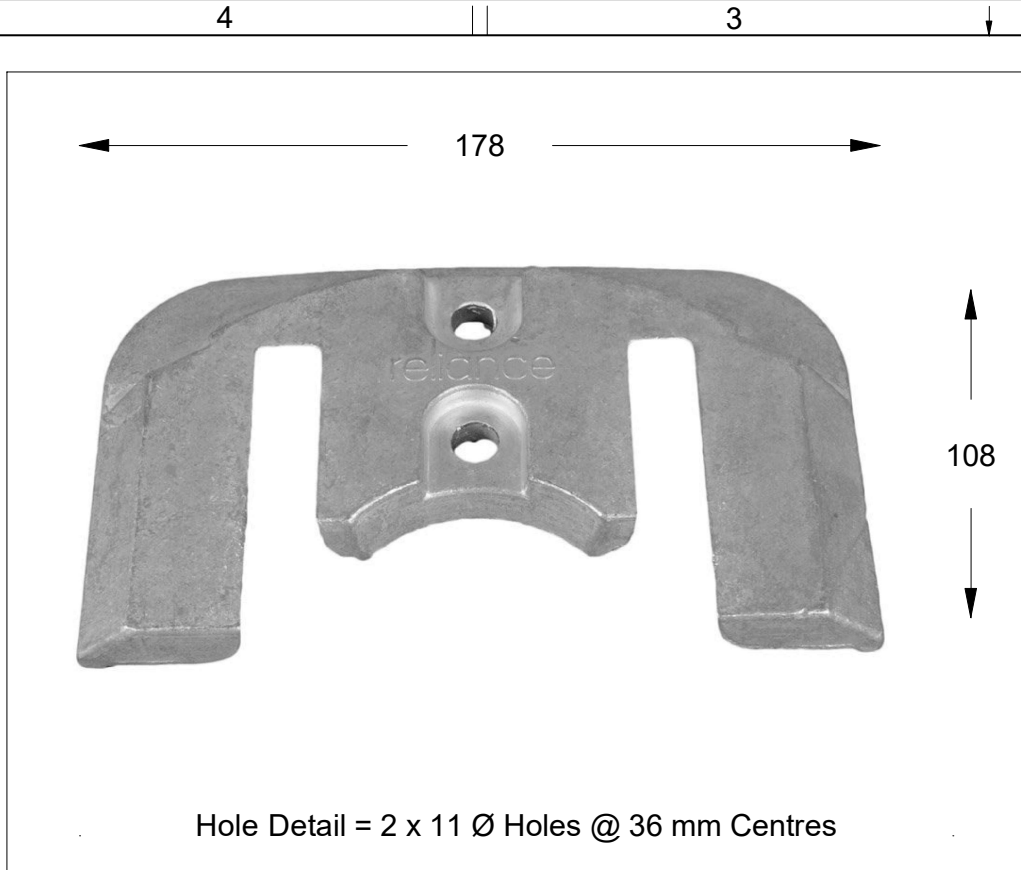

Hole Detail = 2 x 11 Ø Holes @ 36 mm Centres

**Bravo Gen II Plate Anode**  
 Replaces Genuine Part: 821630

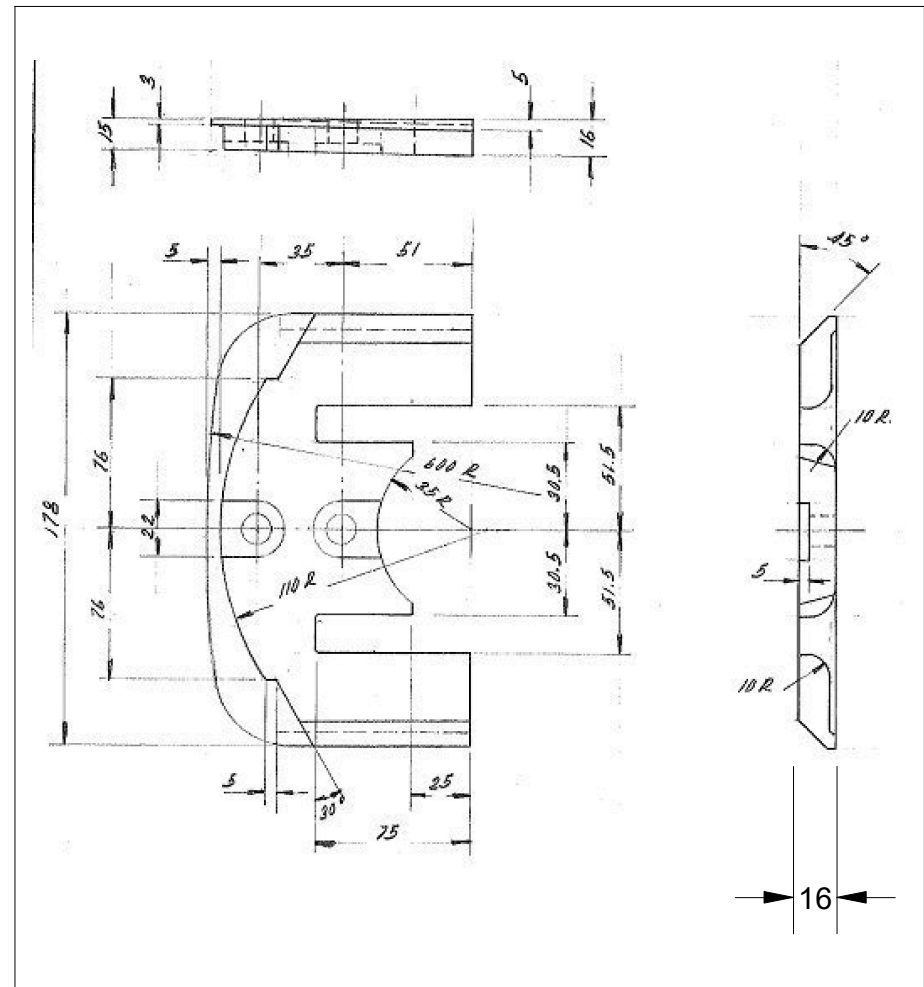

All dimensions are in mm (nominal)

**Notes**

1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications

Rev	Details of Change(s)	Date	Drawn	Verified
1	Cathodic Diecasting Original	17 Aug 2011	R.N.	R.G.
2	2013 / 2019 Catalogue Version (CAA Logo)	21 Aug 2020	R.N.	R.G.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
<b>0.380</b>	<b>0.380</b>



Cathodic Anodes Australasia

[cathodicanodes.com.au](http://cathodicanodes.com.au)

Product <b>Aluminium Anode</b>	
Part no. <b>CDA9-065</b>	Scale <b>NTS</b>
Drawing No: <b>CD3116</b>	Rev <b>2</b> Sheet <b>1 of 1</b>
Drawn by: R Northey Date: 21 AUG 2020	
Mould No: X Tooling:	

Chemical Composition Limits		Alloy:
Standard: MIL-DTL-24779A(SH)		<b>24779A</b>
Aluminium (Most current revision)		
Element	min.	max.
Zinc	4.0	6.5
Indium	0.014	0.020
Mercury	-	0.001
Silicon	0.08	0.20
Iron	-	0.090
Copper	-	0.004
Tin	-	0.001
Aluminium	remainder	