


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.  
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.  
 Customer to confirm current revision of drawing prior to ordering.




Chemical Composition Limits			Alloy: <b>A1</b>
Standard: AS2239 (Most current revision)	min.	max.	
<b>Aluminium</b>			
Element	min.	max.	
Zinc	2.1	2.7	
Indium	0.017	0.025	
Cadmium	0.008	0.012	
Silicon	-	0.20	
Iron	-	0.12	
Copper	-	0.006	
Other Impurities			
- each	-	0.02	
- total	-	0.05	
Aluminium	remainder		

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
  2. All sharp edges removed for safe handling
  3. Anode insert material to meet relevant Australian/International specifications

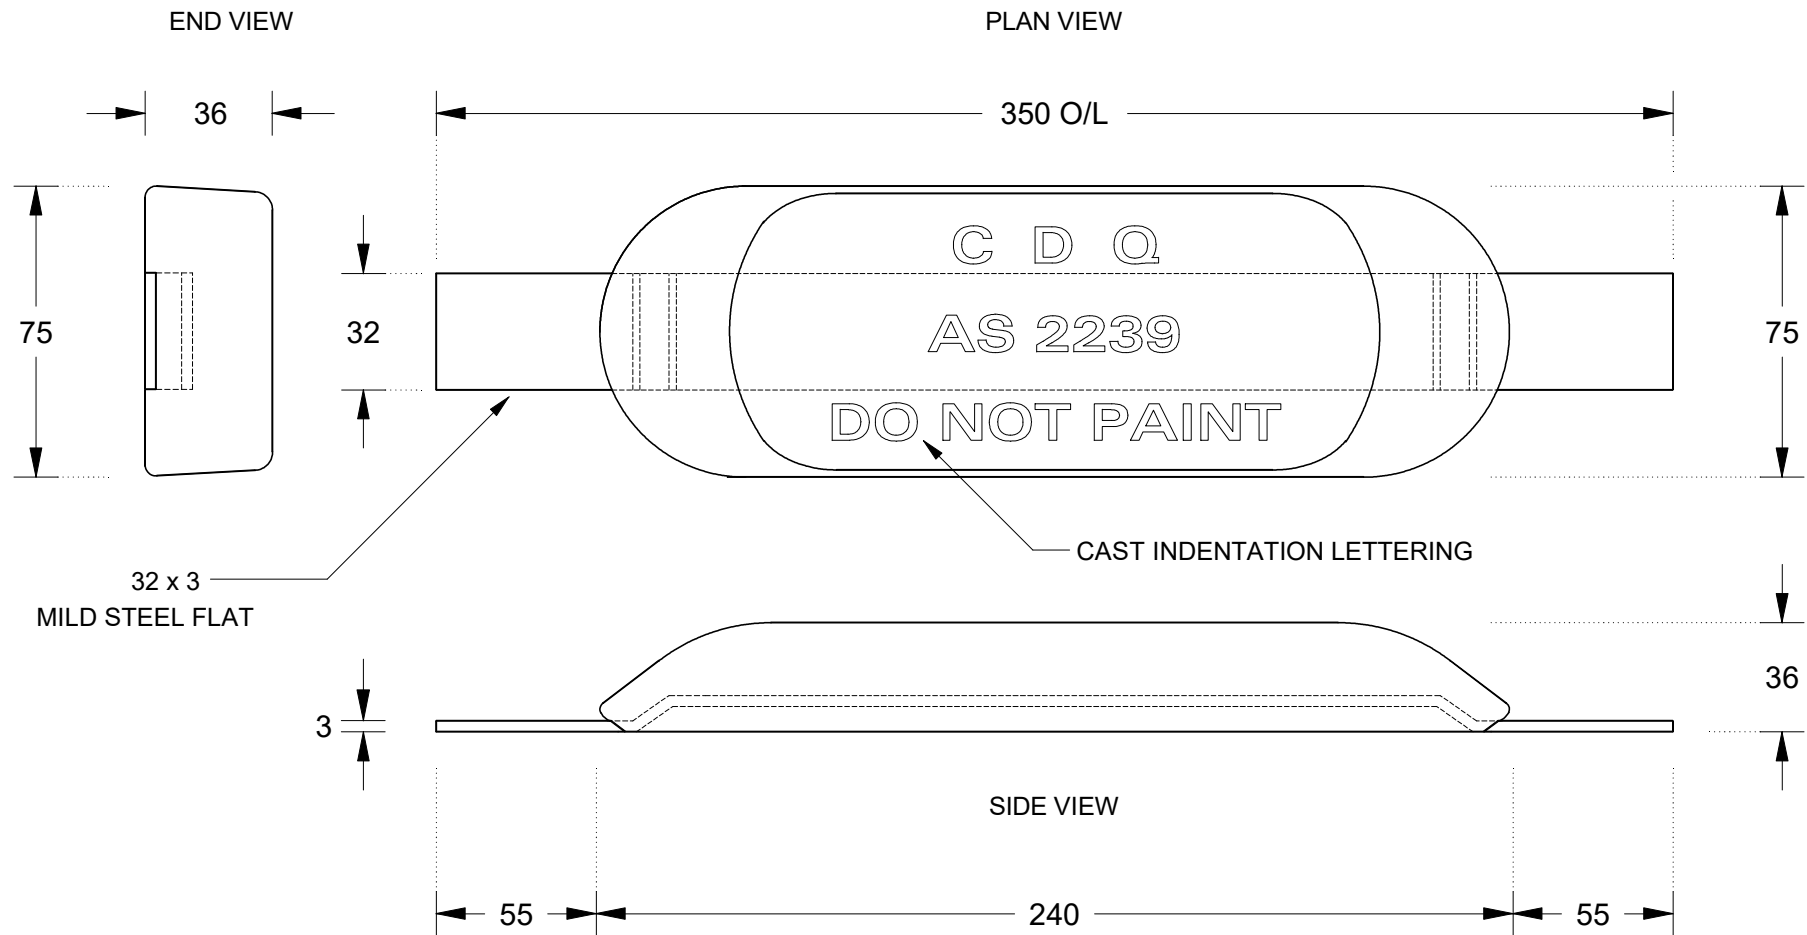

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
<b>1.30</b>	<b>1.60</b>



Cathodic Anodes Australasia

[cathodicanodes.com.au](http://cathodicanodes.com.au)

Product <b>Aluminium Anode</b>		Scale <b>1 : 2</b>	
Part no. <b>CDA-1.55S Type 1 (A1)</b>		Rev <b>2</b>	Sheet <b>1 of 1</b>
Drawing No: <b>CD3129</b>			
Drawn by: R Northey Date: 20 NOV 2013			
Mould No: 52	Insert: In House		

All dimensions are in mm (nominal)

Rev	Details of Change(s)	Date	Initials
1	Cathodic Diecasting Original	31 OCT 08	B.L.
2	2013 Catalogue Version (CAA Logo)	20 NOV 13	R.N.