


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.  
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.  
 Customer to confirm current revision of drawing prior to ordering.

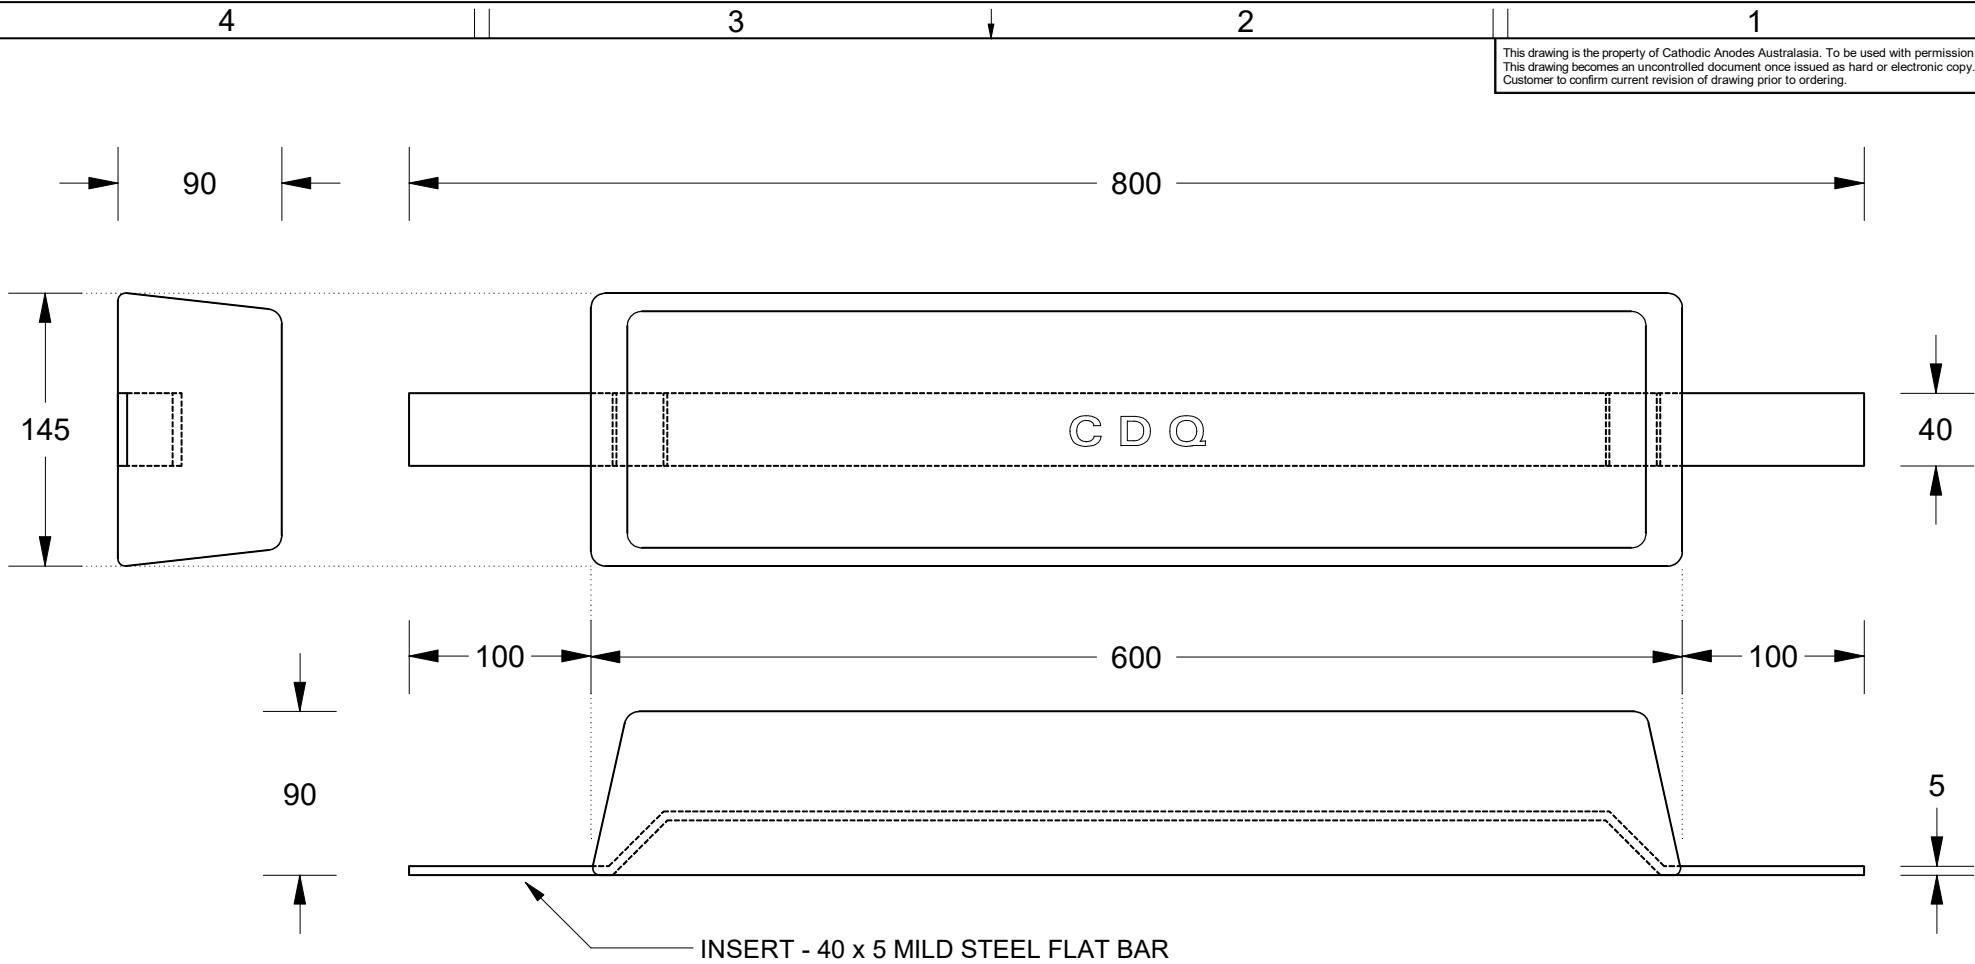

INSERT - 40 x 5 MILD STEEL FLAT BAR

C D Q  
 CAST INDENTATION LETTERING

All dimensions are in mm (nominal)

Chemical Composition Limits		Alloy:
Standard: AS2239 (Most current Revision)		<b>A1</b>
Aluminium		
Element	min.	max.
Zinc	2.1	2.7
Indium	0.017	0.025
Cadmium	0.008	0.012
Silicon	-	0.20
Iron	-	0.12
Copper	-	0.006
Other Impurities	-	-
- each	-	0.02
- total	-	0.05
Aluminium	remainder	

Notes

1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Drawn	Verified
1	Cathodic Diecasting Original	01 APR 2009	B.L.	R.G.
2	2013 Catalogue Version (CAA Logo)	17 DEC 2013	R.N.	R.G.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
<b>20.0</b>	<b>21.2</b>



cathodicanodes.com.au

Product <b>Aluminium Anode</b>	
Part no. <b>CDA-20S Type 2 (A1)</b>	Scale <b>1 : 4</b>
Drawing No: <b>CD3141</b>	Rev Sheet <b>2 1 of 1</b>
Drawn by: R Northey	Date: 17 DEC 2013
Mould No: 8	Strap Sample: 08