


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

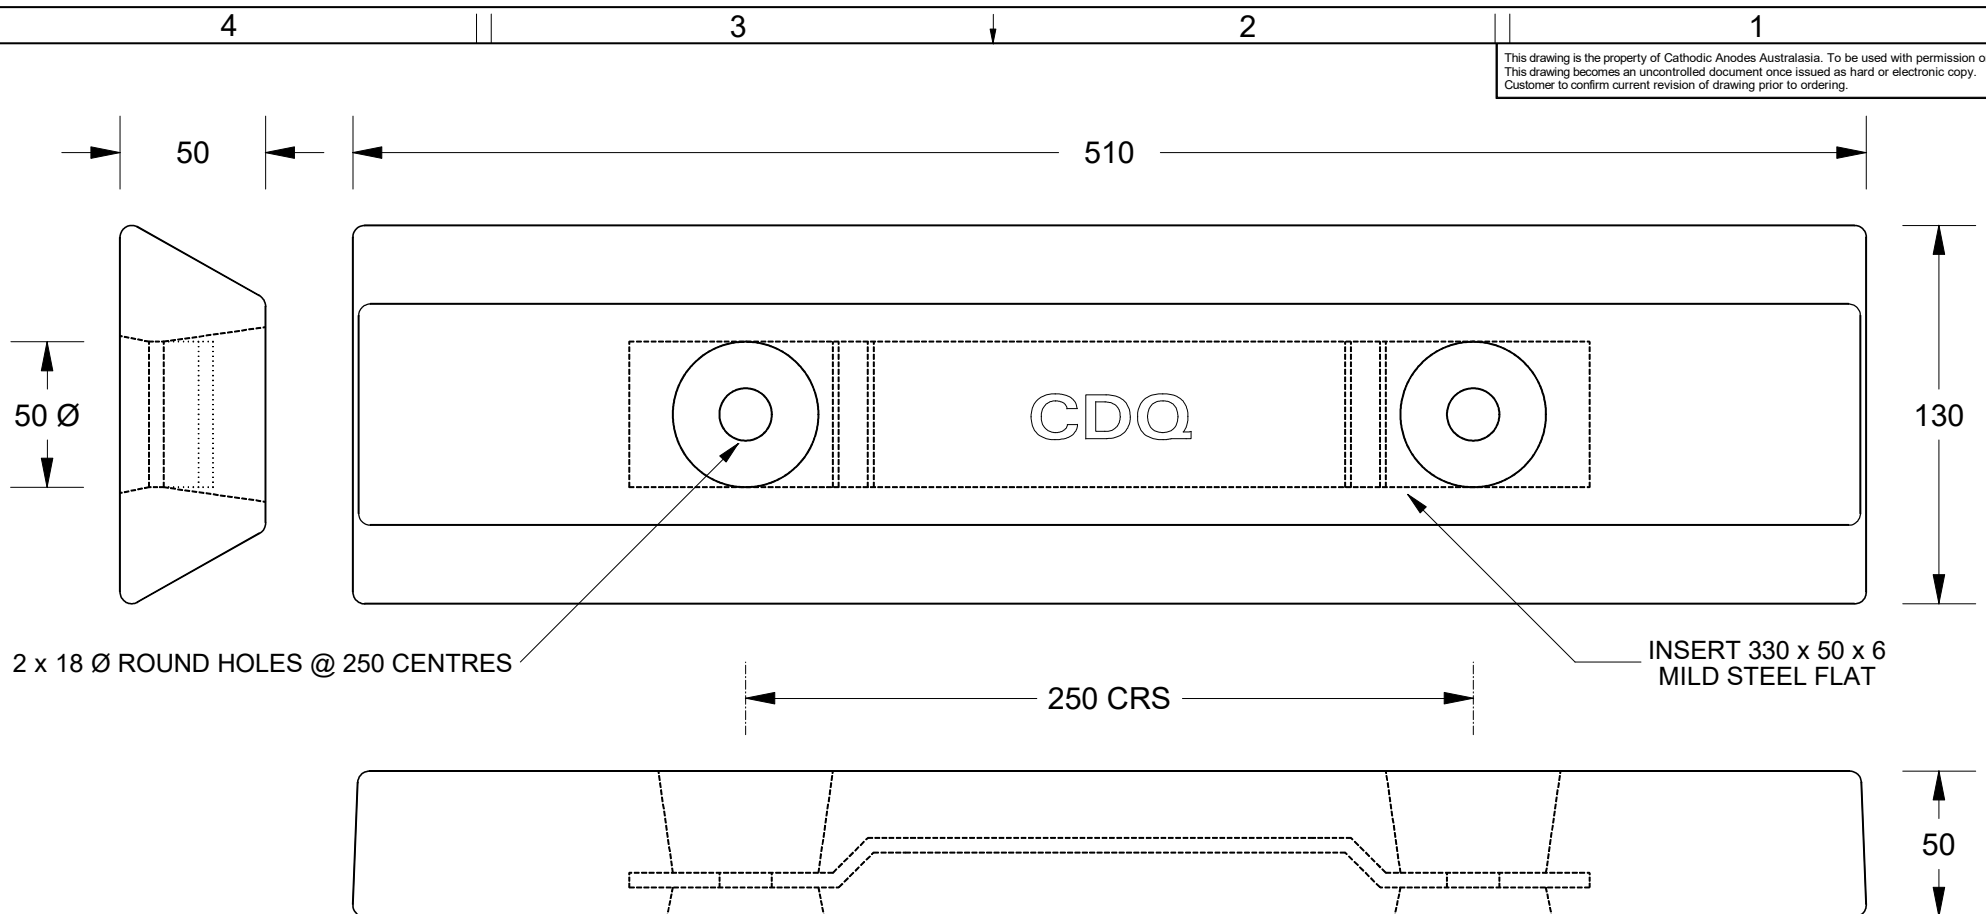

2 x 18 Ø ROUND HOLES @ 250 CENTRES

INSERT 330 x 50 x 6
MILD STEEL FLAT

CDQ

CDQ
CAST INDENTATION LETTERING

All dimensions are in mm (nominal)

Chemical Composition Limits			Alloy: A1
Standard: AS2239 (Most current revision)			
Element	min.	max.	
Zinc	2.1	2.7	
Indium	0.017	0.025	
Cadmium	0.008	0.012	
Silicon	-	0.20	
Iron	-	0.12	
Copper	-	0.006	
Other Impurities			
- each	-	0.02	
- total	-	0.05	
Aluminium	remainder		

- Notes
- Anodes are cast to comply with CAA's standard casting tolerances
 - All sharp edges removed for safe handling
 - Anode insert material to meet relevant Australian/International specifications



Nett Weight Kg (nominal)		Gross Weight Kg (nominal)		
6.40		7.20		
Rev	Details of Change(s)	Date	Drawn	Verified
1	Cathodic Diecasting Original	08 August 2010	B.L.	R.G.
2	2013 Catalogue Version (CAA Logo)	10 January 2014	R.N.	R.G.

CAA
Cathodic Anodes Australasia

cathodicanodes.com.au

Product Aluminium Anode		Scale 1 : 2.5	
Part no. CDA-7H (A1)		Rev 2	Sheet 1 of 1
Drawing No: CD3145		Drawn by: R Northey Date: 10 JAN 2014	
Mould No: 9		Strap Sample: 37 Metric	

