


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

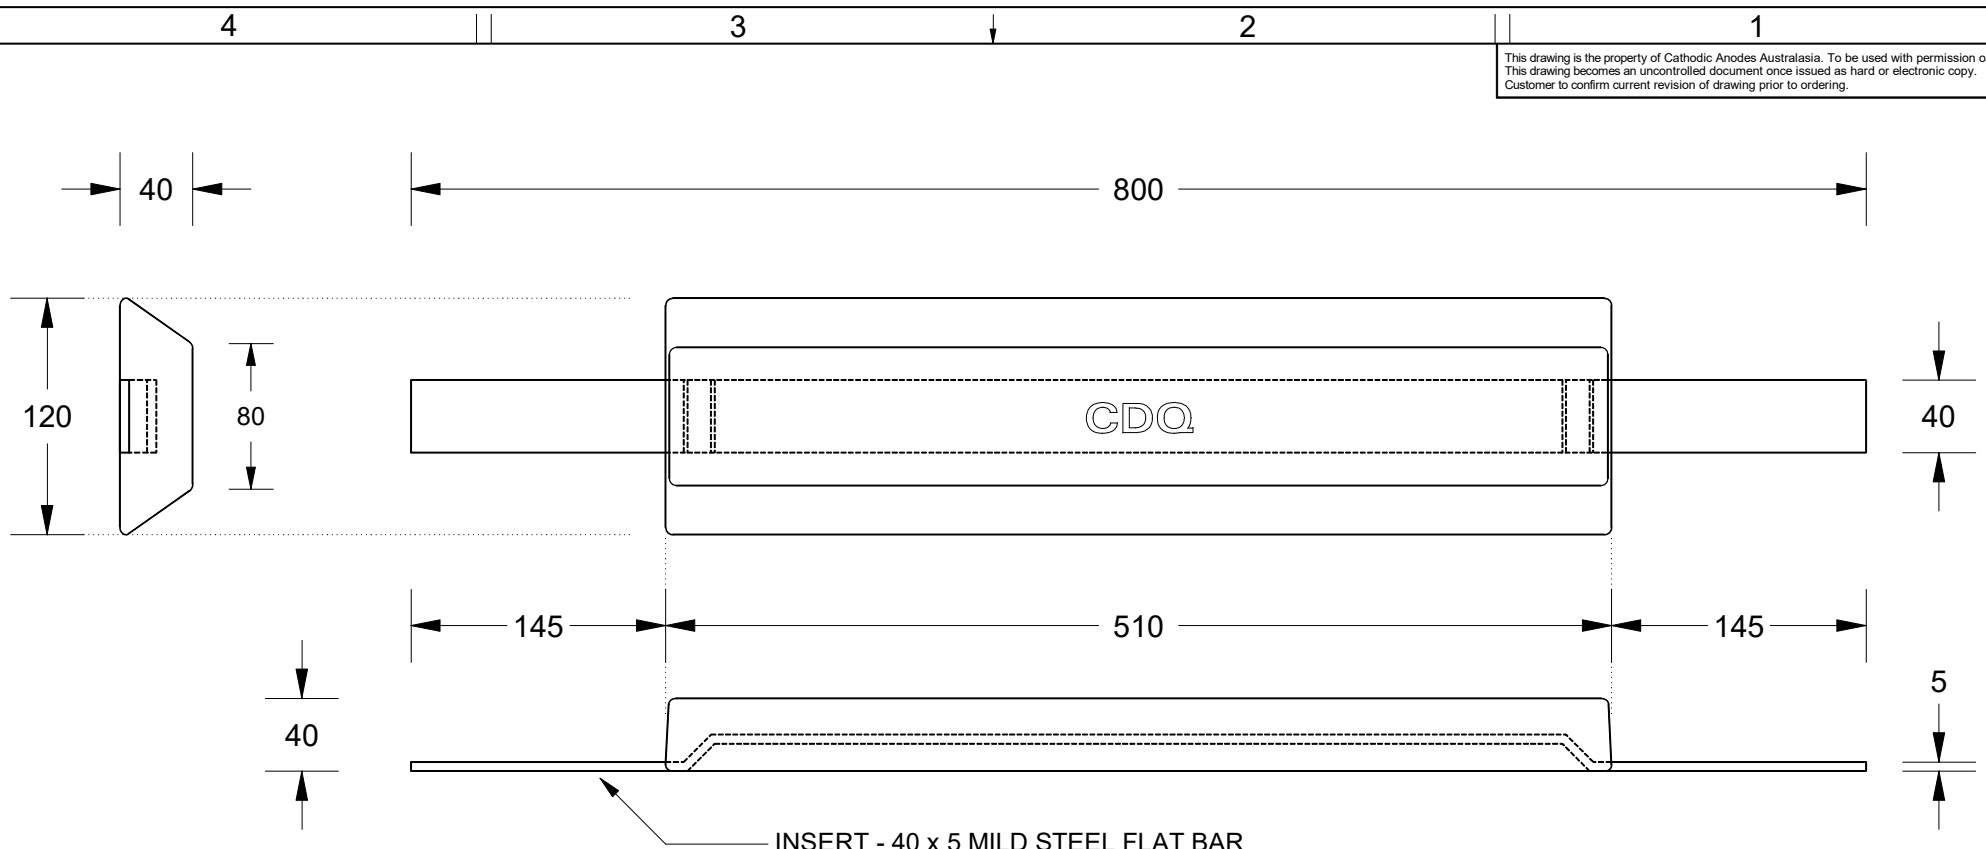

INSERT - 40 x 5 MILD STEEL FLAT BAR

CDQ
 CAST INDENTATION LETTERING

Chemical Composition Limits			Alloy: A1
Standard: AS2239 (Most current revision)			
Element	min.	max.	
Zinc	2.1	2.7	
Indium	0.017	0.025	
Cadmium	0.008	0.012	
Silicon	-	0.20	
Iron	-	0.12	
Copper	-	0.006	
Other Impurities			
- each	-	0.02	
- total	-	0.05	
Aluminium		remainder	

- Notes
- Anodes are cast to comply with CAA's standard casting tolerances
 - All sharp edges removed for safe handling
 - Anode insert material to meet relevant Australian/International specifications



Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
5.30	6.50

CAA
 Cathodic Anodes Australasia
 cathodicanodes.com.au

Product Aluminium Anode		Scale 1 : 4	
Part no. CDA-6S Type 2 (A1)		Rev 2	Sheet 1 of 1
Drawing No: CD3180		Date: 17 DEC 2013	
Mould No: 9		Strap Sample 01	

All dimensions are in mm (nominal)

Rev	Details of Change(s)	Date	Drawn	Verified
1	Cathodic Diecasting Original	25 FEB 09	B.L.	R.G.
2	2013 Catalogue Version (CAA Logo)	17 DEC 13	R.N.	R.G.