


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

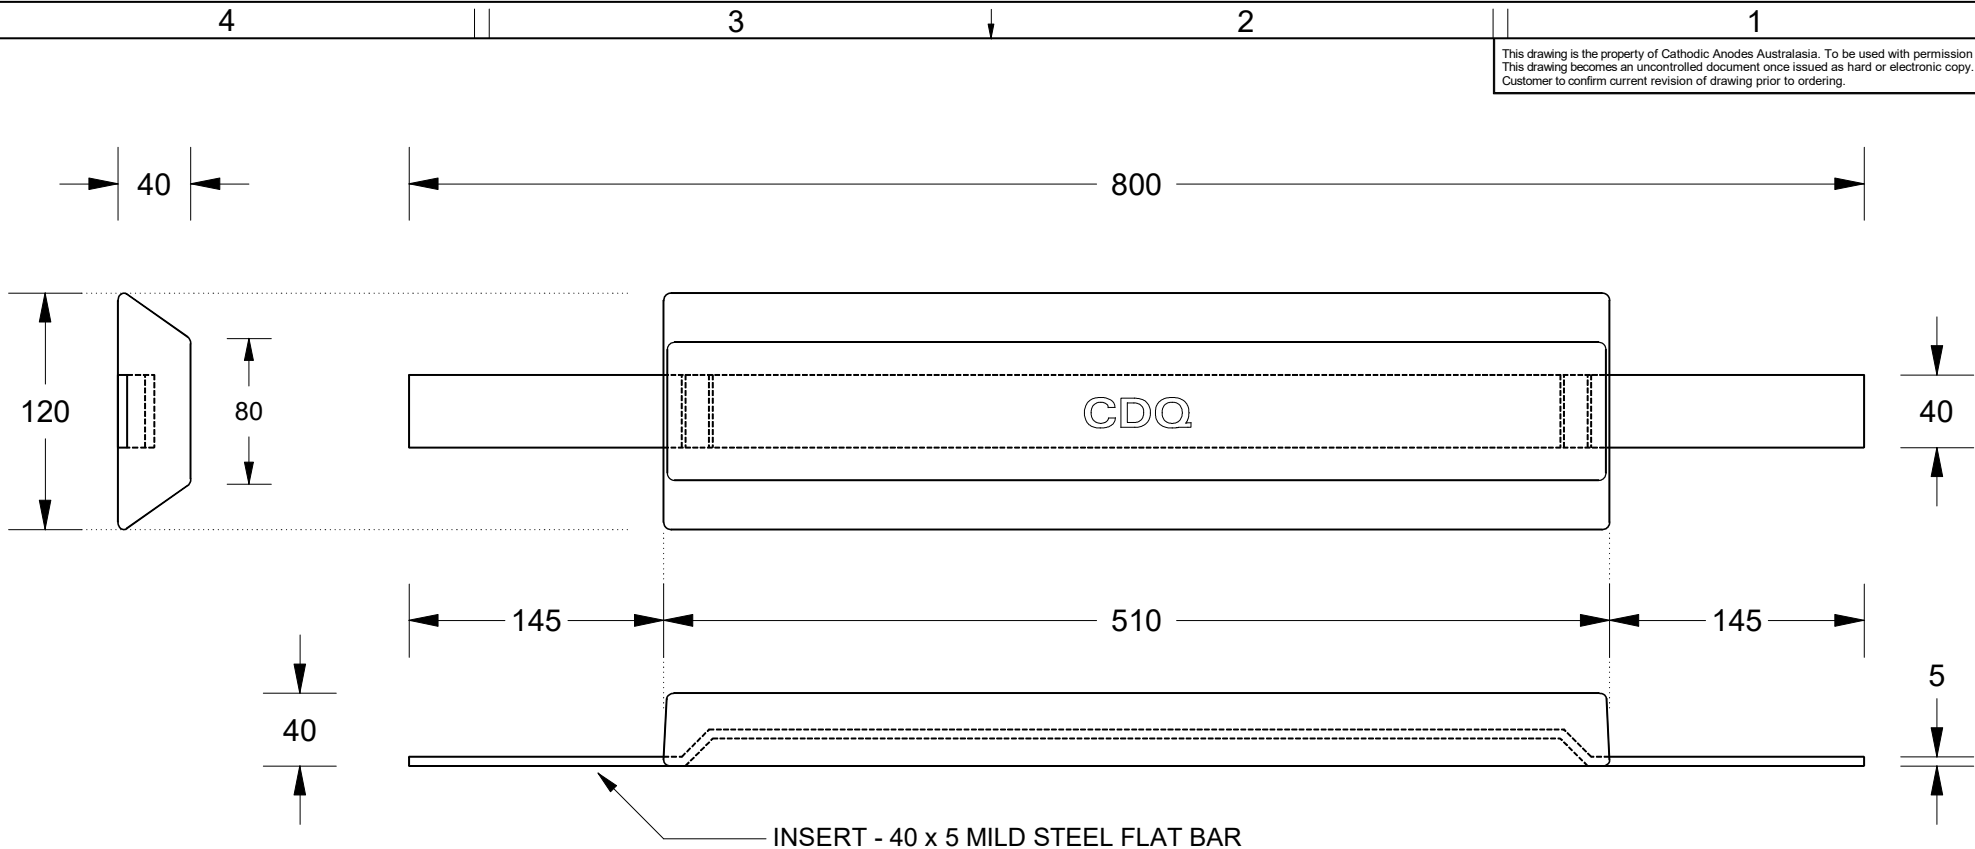

INSERT - 40 x 5 MILD STEEL FLAT BAR

CDQ
 CAST INDENTATION LETTERING

All dimensions are in mm (nominal)

Chemical Composition Limits			Alloy:
Standard: AS2239 (Most current revision)			A6
Aluminium			
Element	min.	max.	
Zinc	2.0	6.0	
Indium	0.01	0.02	
Cadmium	-	0.005	
Silicon	0.08	0.12	
Iron	-	0.12	
Magnesium	-	0.02	
Titanium	-	0.02	
Copper	-	0.006	
Tin	-	0.02	
Other Impurities			
- each	-	0.02	
- total	-	0.05	
Aluminium	remainder		

Notes

1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications



Nett Weight		Gross Weight		
Kg (nominal)		Kg (nominal)		
5.30		6.50		
Rev	Details of Change(s)	Date	Drawn	Verified
1	Cathodic Diecasting Original	25 FEB 09	B.L.	R.G.
2	2013 Catalogue Version (CAA Logo)	17 DEC 13	R.N.	R.G.



cathodicanodes.com.au

Product			
Aluminium Anode			
Part no.		Scale	
CDA-6S Type 2 (A6)		1 : 4	
Drawing No: CD3181		Rev	Sheet
		2	1 of 1
Drawn by: R Northey		Date: 17 DEC 2013	
Mould No: 9		Strap Sample 01	

