


**Fernstrum 1274A**

This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.

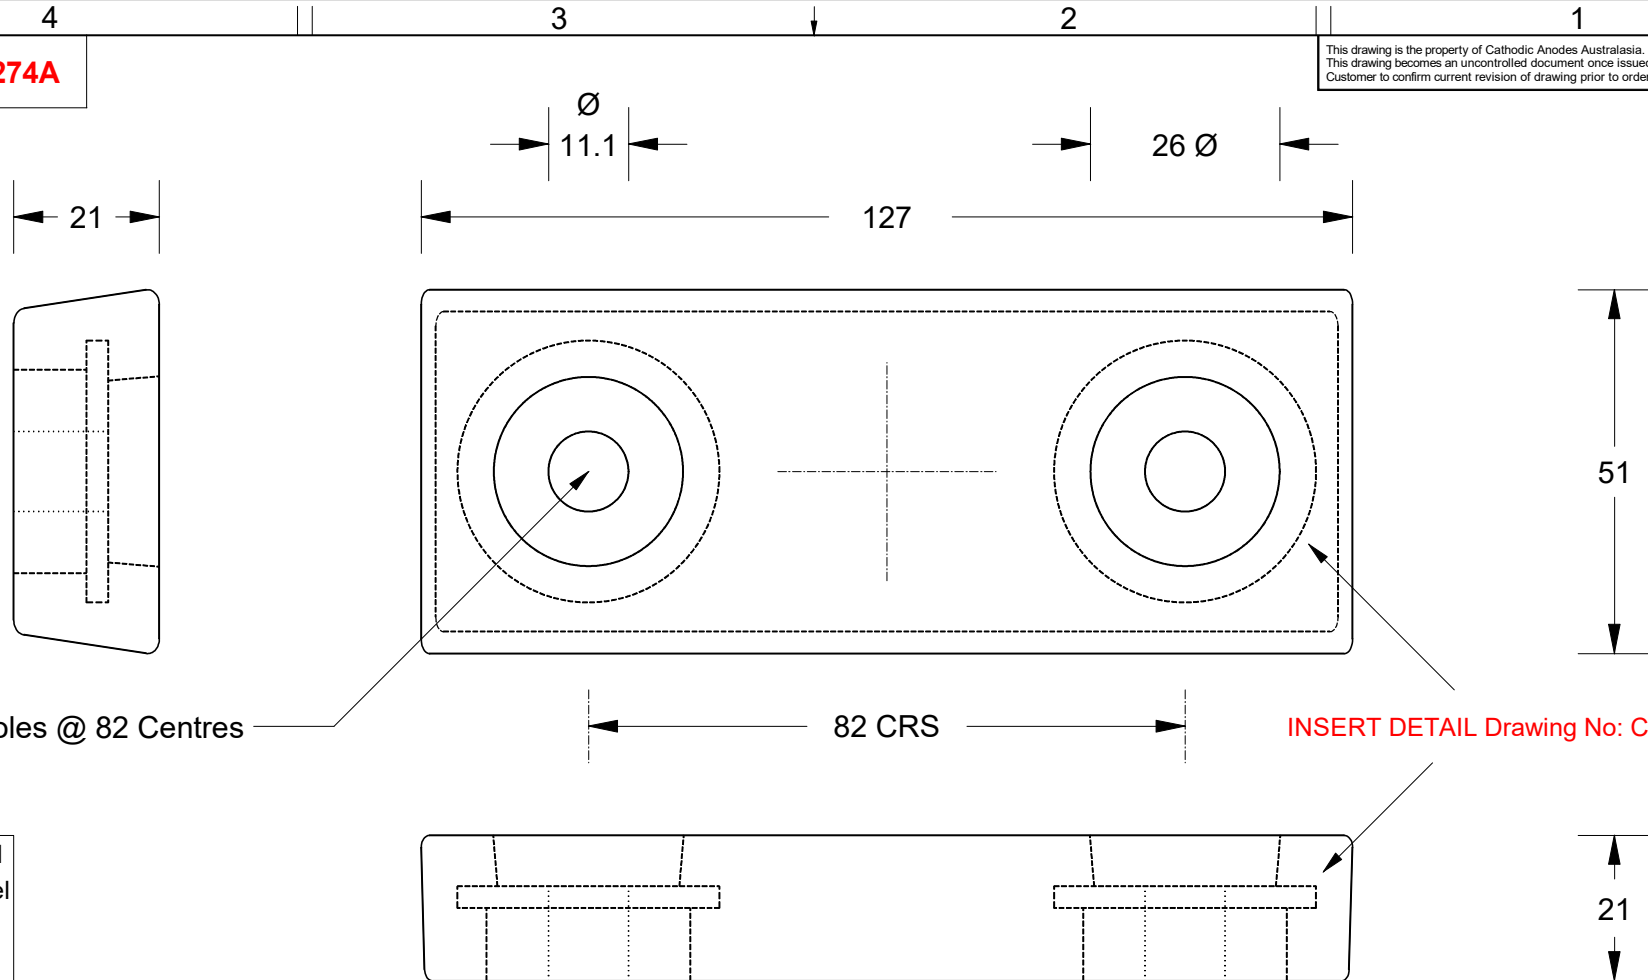

Insert Material  
Machined Steel  
Drawing No:  
**CD2163**

PART NO. 1274A COLOUR - GREEN 1.5# EA, 4# PER SET

B8 - B16, BBU - B1U

C6 - C16, C6U - C16U

MILLIMETERS SHOWN ARE ROUNDED

All dimensions are in mm (nominal)

Chemical Composition Limits		Alloy:
Standard: AS2239* (Most current revision)		<b>Z1</b>
Element	min.	max.
Cadmium	0.025	0.07
Aluminium	0.10	0.50
Silicon	-	0.005
Copper	-	0.005
Iron	-	0.005
Lead	-	0.006
Other Impurities		
- each	-	0.005
- total	-	0.02
Zinc		remainder

\* Corresponds to MIL-DTL-18001L alloy composition

Notes

- Anodes are cast to comply with CAA's standard casting tolerances
- All sharp edges removed for safe handling
- Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Drawn	Verified
1	Cathodic Diecasting Original	15 February 2012	R.N.	R.G.
2	2013 Catalogue Version (CAA Logo)	29 April 2014	R.N.	R.G.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
<b>0.80</b>	<b>0.90</b>



Cathodic Anodes Australasia

[cathodicanodes.com.au](http://cathodicanodes.com.au)

Product <b>Zinc Anode Fernstrum 1274A</b>	
Part no. <b>CDZ2-52-813H Type 1</b>	Scale <b>1 : 1</b>
Drawing No: <b>CD3262</b>	Rev Sheet <b>2 1 of 1</b>
Drawn by: R Northey Date: 29 APR 2014	
Mould No: 6 Tooling: Custom	