


Fernstrum 1404

This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.

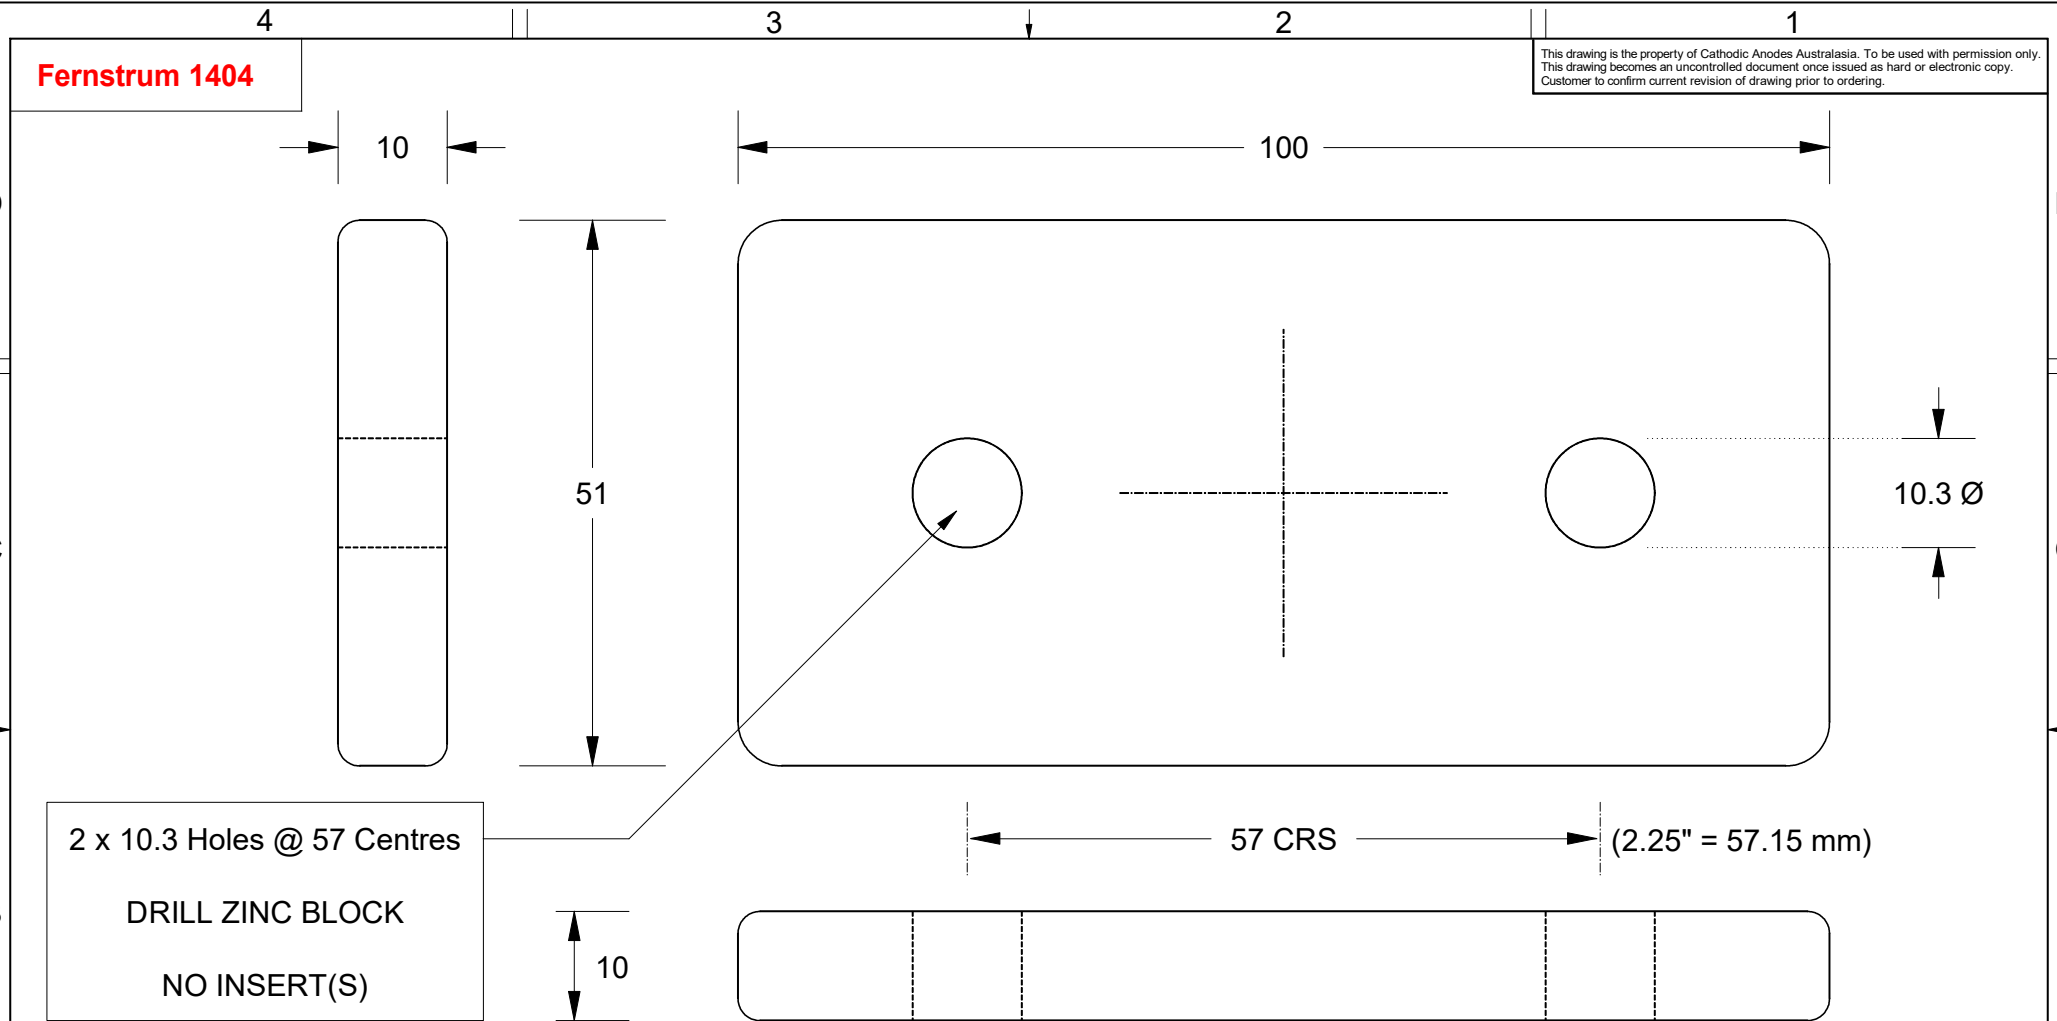

2 x 10.3 Holes @ 57 Centres
DRILL ZINC BLOCK
NO INSERT(S)

PART NO. 1404 COLOUR - BLACK 0.75# EA, 2# PER SET B4U-E1, B6 & B6U

MILLIMETERS SHOWN ARE ROUNDED
 All dimensions are in mm (nominal)

Chemical Composition Limits			Alloy:
Standard: AS2239* (Most current revision)			Z1
Element	min.	max.	
Cadmium	0.025	0.07	
Aluminium	0.10	0.50	
Silicon	-	0.005	
Copper	-	0.005	
Iron	-	0.005	
Lead	-	0.006	
Other Impurities			
- each	-	0.005	
- total	-	0.02	
Zinc		remainder	

* Corresponds to MIL-DTL-18001L alloy composition

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications



Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
0.34	0.34

Rev	Details of Change(s)	Date	Drawn	Verified
1	Cathodic Diecasting Original	15 February 2012	R.N.	R.G.
2	2013 Catalogue Version (CAA Logo)	29 April 2014	R.N.	R.G.



cathodicanodes.com.au

Product Zinc Anode Fernstrum 1404	
Part no. CDZ2-42-375H Type 1	Scale 1.5 : 1
Drawing No: CD3264	Rev Sheet 2 1 of 1
Drawn by: R Northey Date: 29 APR 2014	
Mould No: 6 Tooling: Blank Ends	