


Fernstrum 3076B


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
This drawing becomes an uncontrolled document once issued as hard or electronic copy.
Customer to confirm current revision of drawing prior to ordering.

4 3 2 1

10 51 14.3 Ø

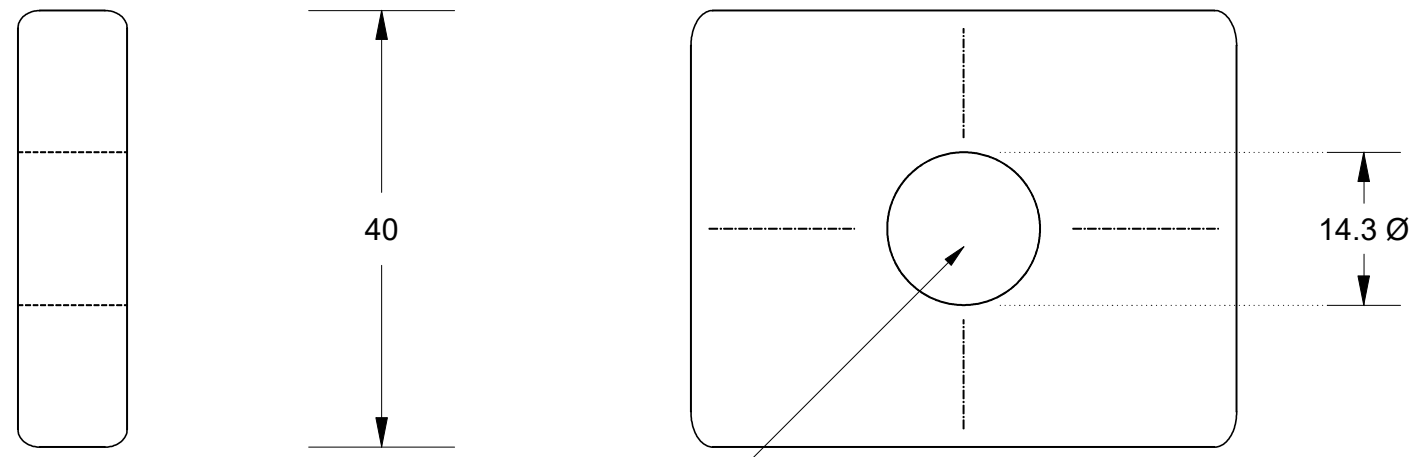

1 x 14.3 Hole
DRILL ZINC BLOCK
NO INSERT(S)

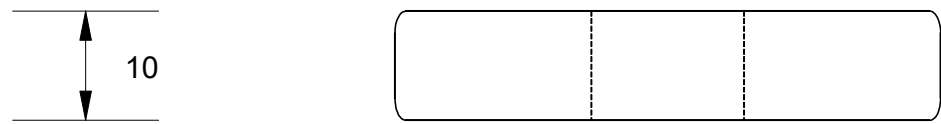

PART NO. 3076B - COLOUR 0.29# EA, 0.75# PER SET BN4-E1 MILLIMETERS SHOWN ARE ROUNDED

All dimensions are in mm (nominal)

Chemical Composition Limits		Alloy:
Standard: AS2239* (Most current revision)		Z1
Element	min.	max.
Cadmium	0.025	0.07
Aluminium	0.10	0.50
Silicon	-	0.005
Copper	-	0.005
Iron	-	0.005
Lead	-	0.006
Other Impurities		
- each	-	0.005
- total	-	0.02
Zinc	remainder	

* Corresponds to MIL-DTL-18001L alloy composition

- Notes
- Anodes are cast to comply with CAA's standard casting tolerances
 - All sharp edges removed for safe handling
 - Anode insert material to meet relevant Australian/International specifications



Nett Weight		Gross Weight		
Kg (nominal)		Kg (nominal)		
0.13		0.13		
Rev	Details of Change(s)	Date	Drawn	Verified
1	Cathodic Diecasting Original	15 February 2012	R.N.	R.G.
2	2013 Catalogue Version (CAA Logo)	29 April 2014	R.N.	R.G.

CAA
Cathodic Anodes Australasia
cathodicanodes.com.au

Product		Zinc Anode Fernstrum 3076B	
Part no.	Scale		
CDZ2-215-375H Type 2	1.5 : 1		
Drawing No:	Rev	Sheet	
CD3265	2	1 of 1	
Drawn by: R Northey	Date: 29 APR 2014		
Mould No: 6	Tooling: Blank Ends		

4 3 2 1