
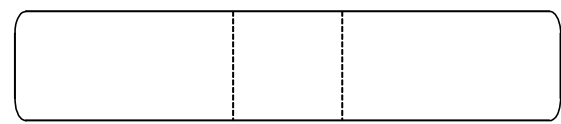

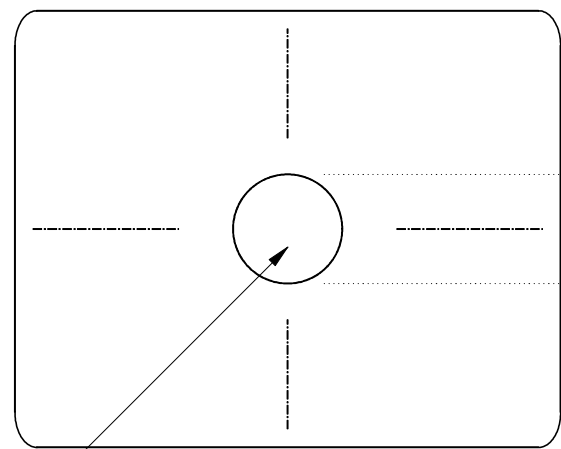


Fernstrum 3076

This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
This drawing becomes an uncontrolled document once issued as hard or electronic copy.
Customer to confirm current revision of drawing prior to ordering.

4 3 2 1

10 51 10.3 Ø

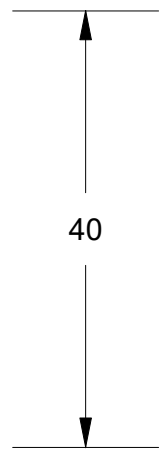

1 x 10.3 Hole
DRILL ZINC BLOCK
NO INSERT(S)

PART NO. 3076 - COLOUR 0.29# EA, 0.75# PER SET

B4-E1

MILLIMETERS SHOWN ARE ROUNDED

All dimensions are in mm (nominal)

Chemical Composition Limits			Alloy: Z1
Standard: AS2239* (Most current revision)	min.	max.	
Zinc			
Element	min.	max.	
Cadmium	0.025	0.07	
Aluminium	0.10	0.50	
Silicon	-	0.005	
Copper	-	0.005	
Iron	-	0.005	
Lead	-	0.006	
Other Impurities			
- each	-	0.005	
- total	-	0.02	
Zinc	remainder		

* Corresponds to MIL-DTL-18001L alloy composition

Notes

1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Nett Weight		Gross Weight	
			Kg (nominal)		Kg (nominal)	
			0.13		0.13	
1	Cathodic Diecasting Original	15 February 2012		R.N.		R.G.
2	2013 Catalogue Version (CAA Logo)	29 April 2014		R.N.		R.G.

CAA
Cathodic Anodes Australasia
cathodicanodes.com.au

Product		Zinc Anode Fernstrum 3076	
Part no.	Scale		
CDZ2-215-375H Type 1	1.5 : 1		
Drawing No: CD3266	Rev	Sheet	
	2	1 of 1	
Drawn by: R Northey	Date: 29 APR 2014		
Mould No: 6	Tooling: Blank Ends		

4 3 2 1