


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

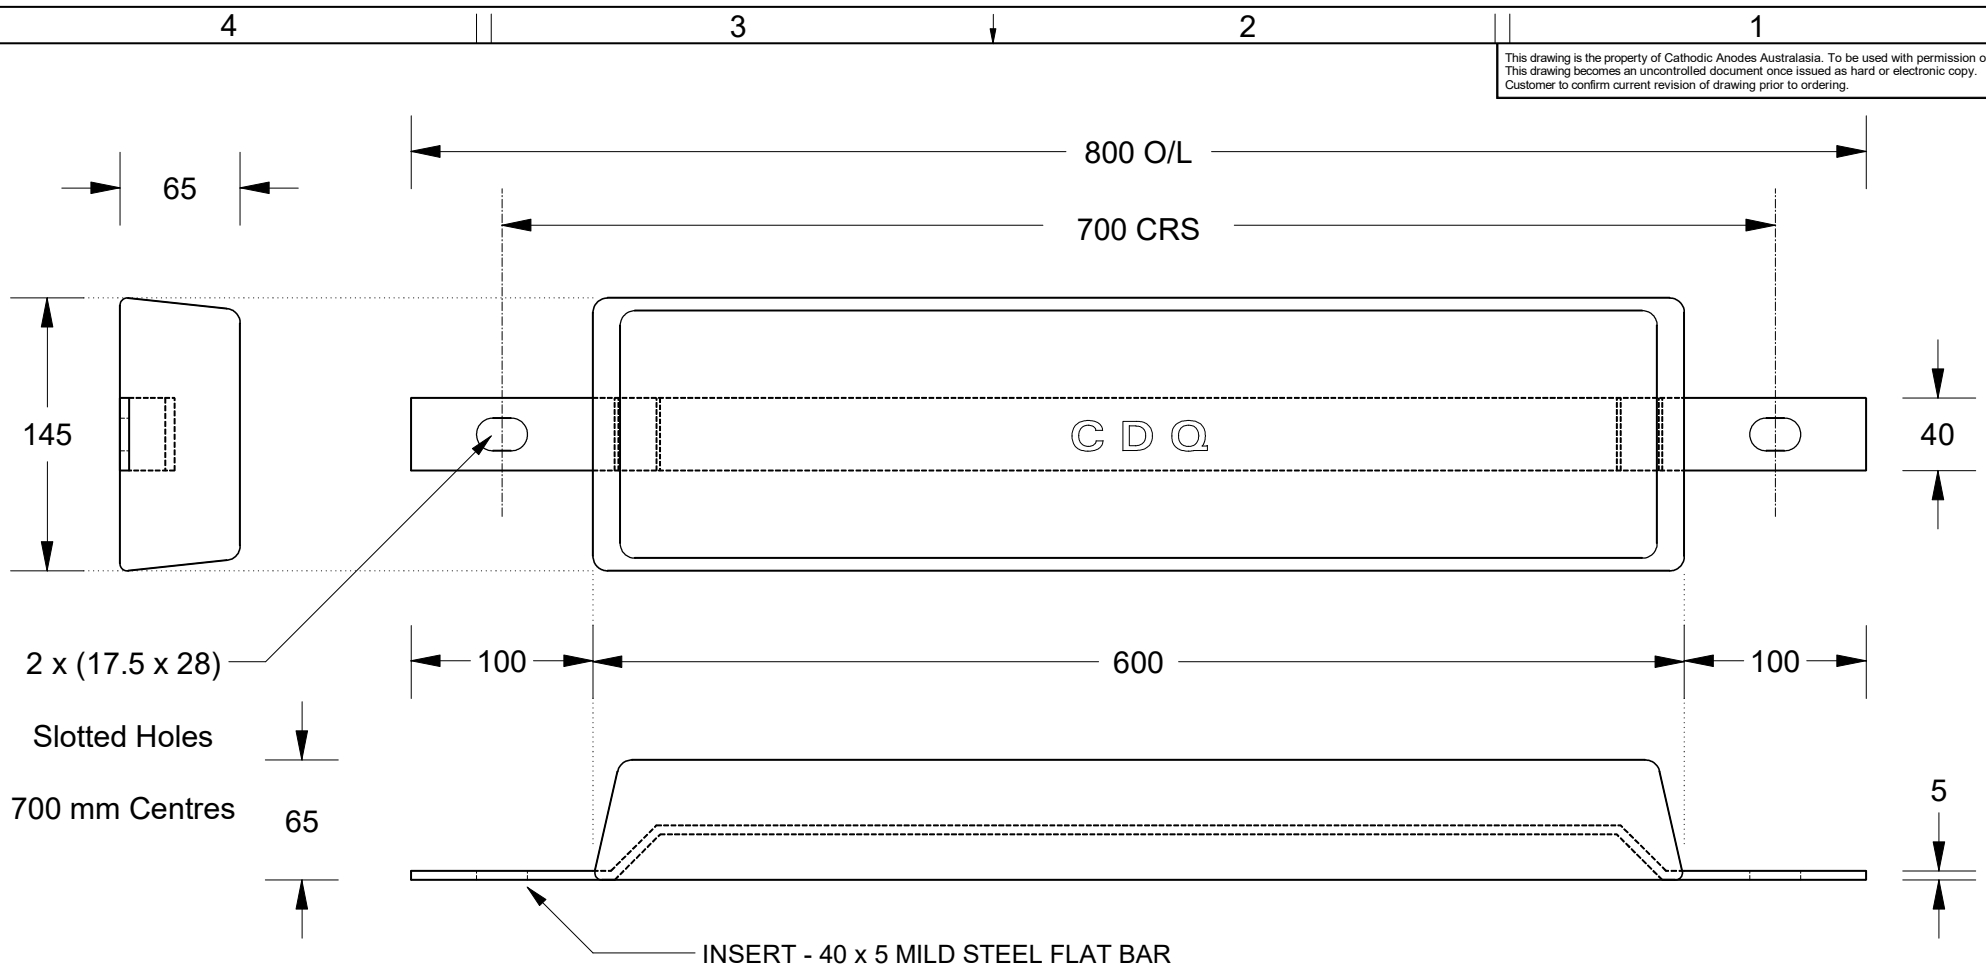

2 x (17.5 x 28)
 Slotted Holes
 700 mm Centres
 65

INSERT - 40 x 5 MILD STEEL FLAT BAR

C D Q
 CAST INDENTATION LETTERING

Chemical Composition Limits			Alloy: A1
Standard: AS2239 (Most current revision)			
Aluminium			
Element	min.	max.	
Zinc	2.1	2.7	
Indium	0.017	0.025	
Cadmium	0.008	0.012	
Silicon	-	0.20	
Iron	-	0.12	
Copper	-	0.006	
Other Impurities			
- each	-	0.02	
- total	-	0.05	
Aluminium	remainder		

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications



Nett Weight Kg (nominal)	Gross Weight Kg (nominal)			
13.8	15.0			
Date	Drawn	Verified		
08 DEC 2015	R.N.	J.L.		
Rev	Details of Change(s)			
1	For Manufacture			

CAA
 Cathodic Anodes Australasia
 cathodicanodes.com.au

Product Aluminium Anode		
Part no. CDA-15S Type 3 (A1)	Scale 1 : 4	
Drawing No: CD3329	Rev 1	Sheet 1 of 1
Drawn by: R Northey	Date: 08 DEC 2015	
Mould No: 8	Strap Sample: 08	

All dimensions are in mm (nominal)

4 3 2 1