


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only. This drawing becomes an uncontrolled document once issued as hard or electronic copy. Customer to confirm current revision of drawing prior to ordering.

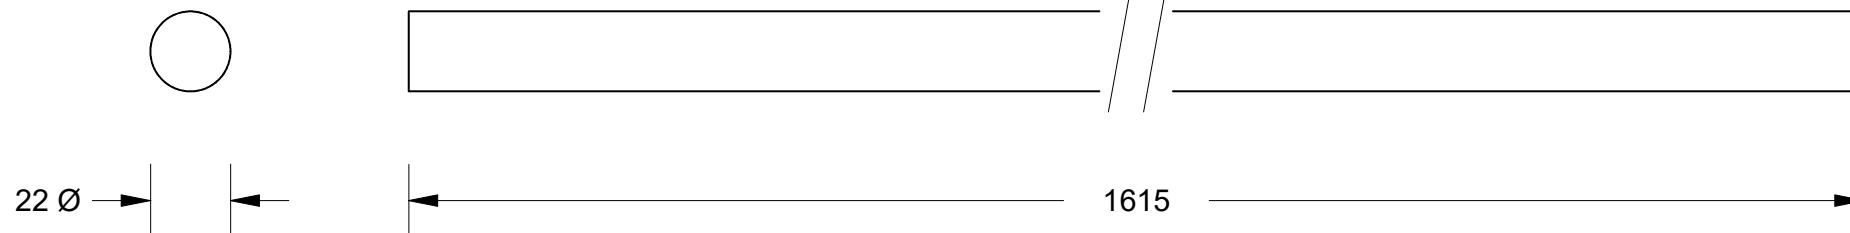

Chemical Composition Limits			Alloy:
Standard: AS2239* (Most current revision)			<b>Z1</b>
Element	min.	max.	
Cadmium	0.025	0.07	
Aluminium	0.10	0.50	
Silicon	-	0.005	
Copper	-	0.005	
Iron	-	0.005	
Lead	-	0.006	
Other Impurities			
- each	-	0.005	
- total	-	0.02	
Zinc	remainder		

\* Corresponds to MIL-DTL-18001L alloy composition


Notes

1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Drawn	Verified
1	2013 Catalogue Version (CAA Logo)	15 December 2015	R.N.	R.G.
2	2019 Catalogue Version, Length = 1615 mm	17 June 2020	R.N.	R.G.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
<b>4.350</b>	<b>N/A</b>



Cathodic Anodes Australasia

[cathodicanodes.com.au](http://cathodicanodes.com.au)

All dimensions are in mm (nominal)

Product		<b>Zinc Anode - Extruded Zinc Rod</b>	
Part no.	<b>CDZ5-875-63E</b>	Scale	<b>1 : 2</b>
Drawing No:	<b>CD3354</b>	Rev	<b>2</b>
		Sheet	<b>1 of 1</b>
Drawn by: R Northey	Date: 17 JUN 2020		
Mould No: N/A	Tooling: N/A		