
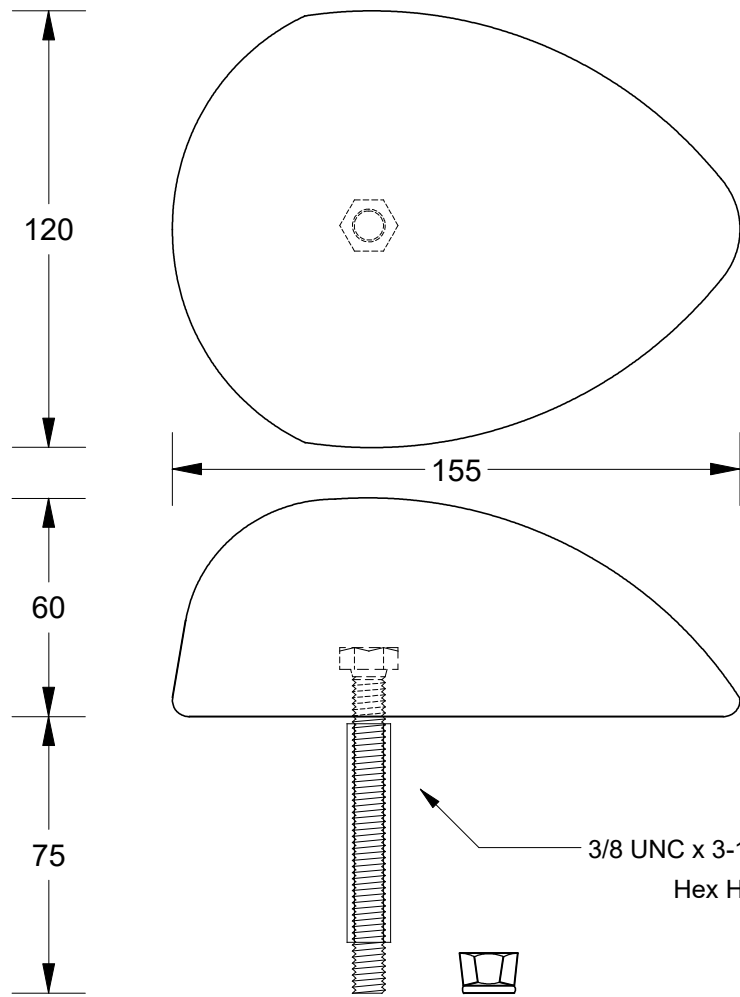


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

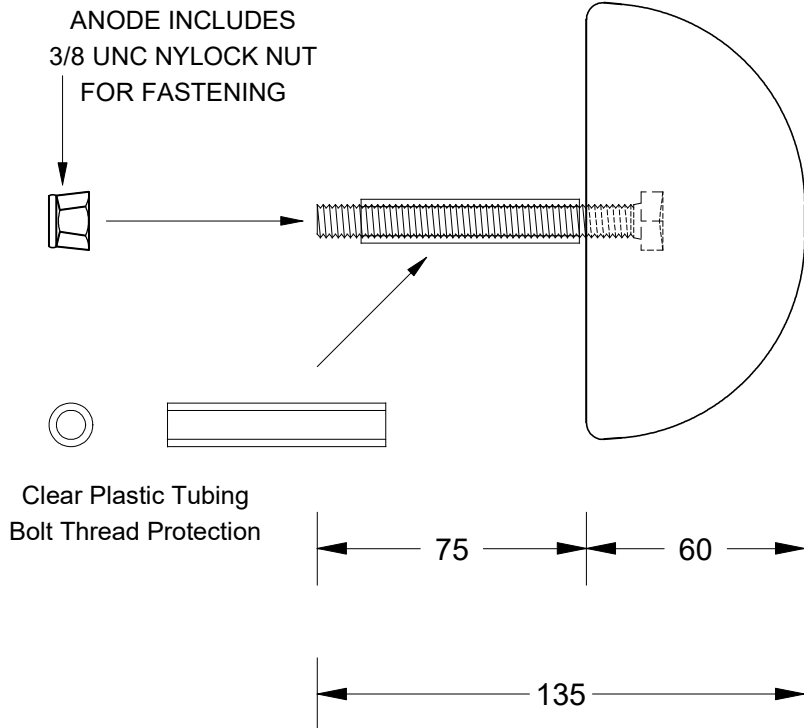

All dimensions are in mm (nominal)

Chemical Composition Limits		Alloy:
Standard: AS2239* (Most current revision)		Z1
Zinc		
Element	min.	max.
Cadmium	0.025	0.07
Aluminium	0.10	0.50
Silicon	-	0.005
Copper	-	0.005
Iron	-	0.005
Lead	-	0.006
Other Impurities		
- each	-	0.005
- total	-	0.02
Zinc	remainder	

* Corresponds to MIL-DTL-18001L alloy composition

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications



Rev	Details of Change(s)	Date	Drawn	Verified
1	Cathodic Diecasting Original	03 July 2012	R.N.	R.G.
2	2013 Catalogue Version (CAA Logo)	17 January 2014	R.N.	R.G.
3	Addition - Clear Plastic Tubing for Thread Protection	02 December 2015	R.N.	R.G.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
3.90	4.00

CAA
 Cathodic Anodes Australasia
 cathodicanodes.com.au

Product Zinc Anode	
Part no. CDZ3-6B	Scale 1 : 2
Drawing No: CD3426	Rev Sheet 3 1 of 1
Drawn by: R Northey Date: 02 DEC 2015	
Mould No: 72	