


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

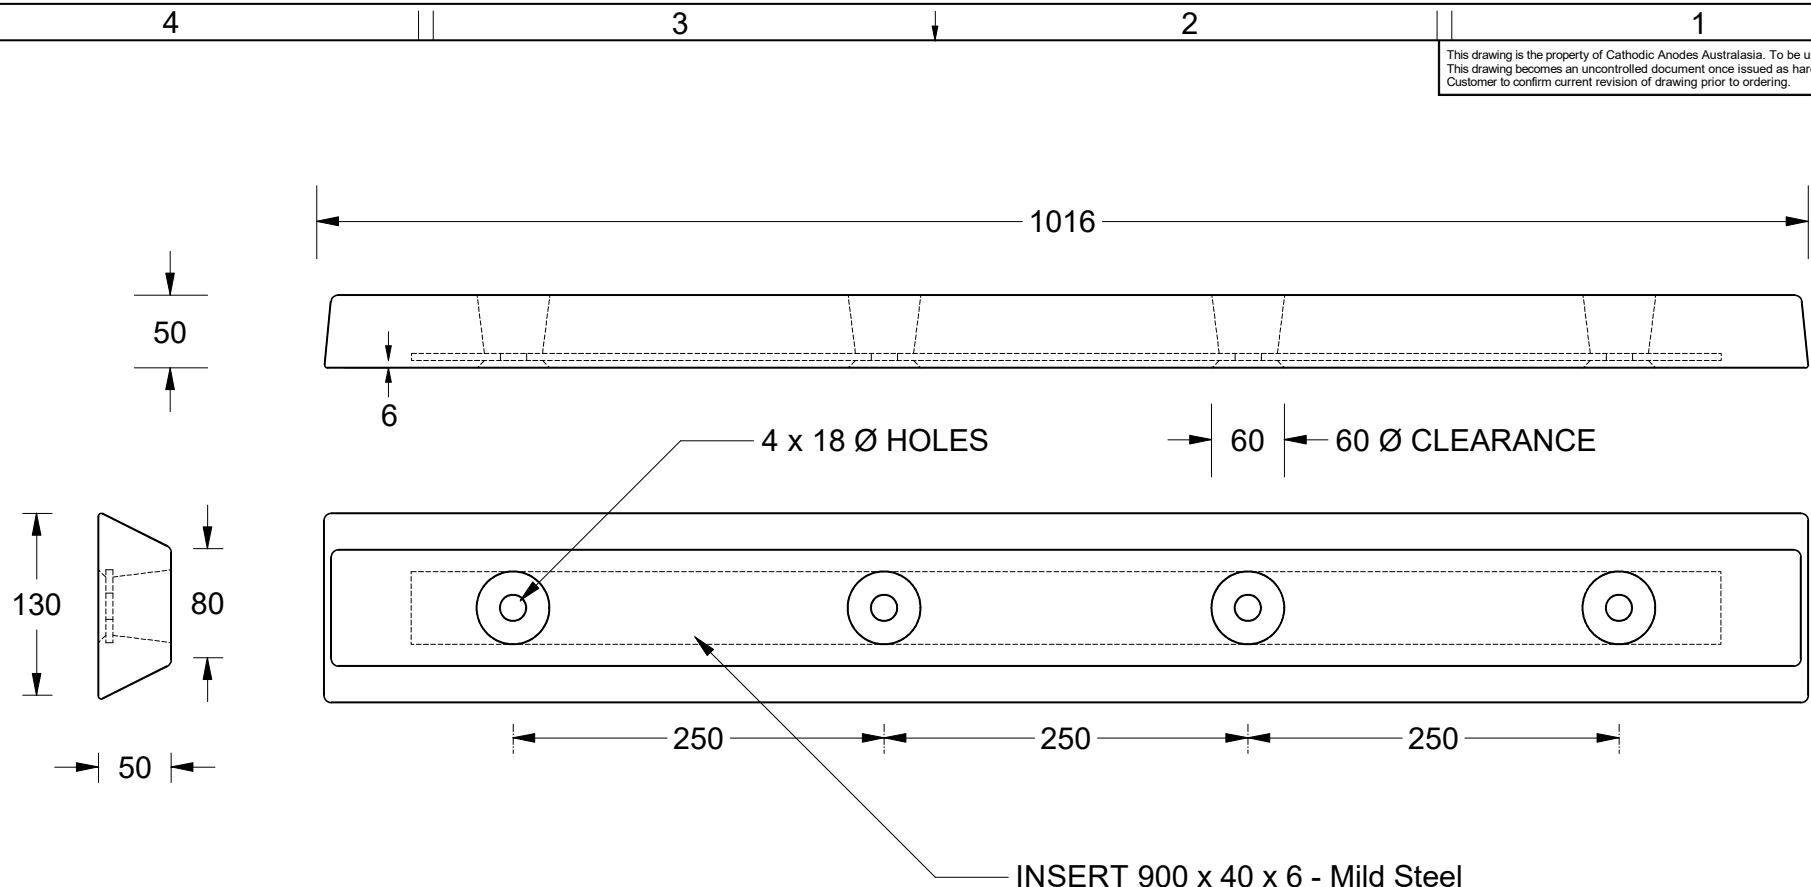

D.S.N. / N.S.N.
5342-66-114-3268
Navy Drawing No:
A 00 2821

INSERT MATERIAL: 900 x 40 x 6 - Mild Steel AS3679.1 - GRADE 250 MIN

- Notes
1. Anodes are cast to comply with CAA's standard casting tolerances
 2. All sharp edges removed for safe handling
 3. Anode insert material to meet relevant Australian/International specifications



All dimensions are in mm (nominal)

Chemical Composition Limits			Alloy: A1
Standard: AS2239 (Most current revision)			
Aluminium			
Element	min.	max.	
Zinc	2.1	2.7	
Indium	0.017	0.025	
Cadmium	0.008	0.012	
Silicon	-	0.20	
Iron	-	0.12	
Copper	-	0.006	
Other Impurities			
- each	-	0.02	
- total	-	0.05	
Aluminium	remainder		

Rev	Details of Change(s)	Date	Drawn	Verified
1	Cathodic Diecasting Original	11 December 2012	R.N.	J.L.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
13.0	14.8

CAA
 Cathodic Anodes Australasia
cathodicanodes.com.au

Product Aluminium Anode		Scale 1 : 5	
Part no. Navy Type 4C Metric		Rev 1	Sheet 1 of 1
Drawing No: CD3526		Drawn by: R Northey Date: 11 DEC 2012	
Mould No:		Tooling:	

D
C
B
A
4
3
2
1