


This drawing is the property of Cathodic Anodes Australasia. To be used with permission only.
 This drawing becomes an uncontrolled document once issued as hard or electronic copy.
 Customer to confirm current revision of drawing prior to ordering.

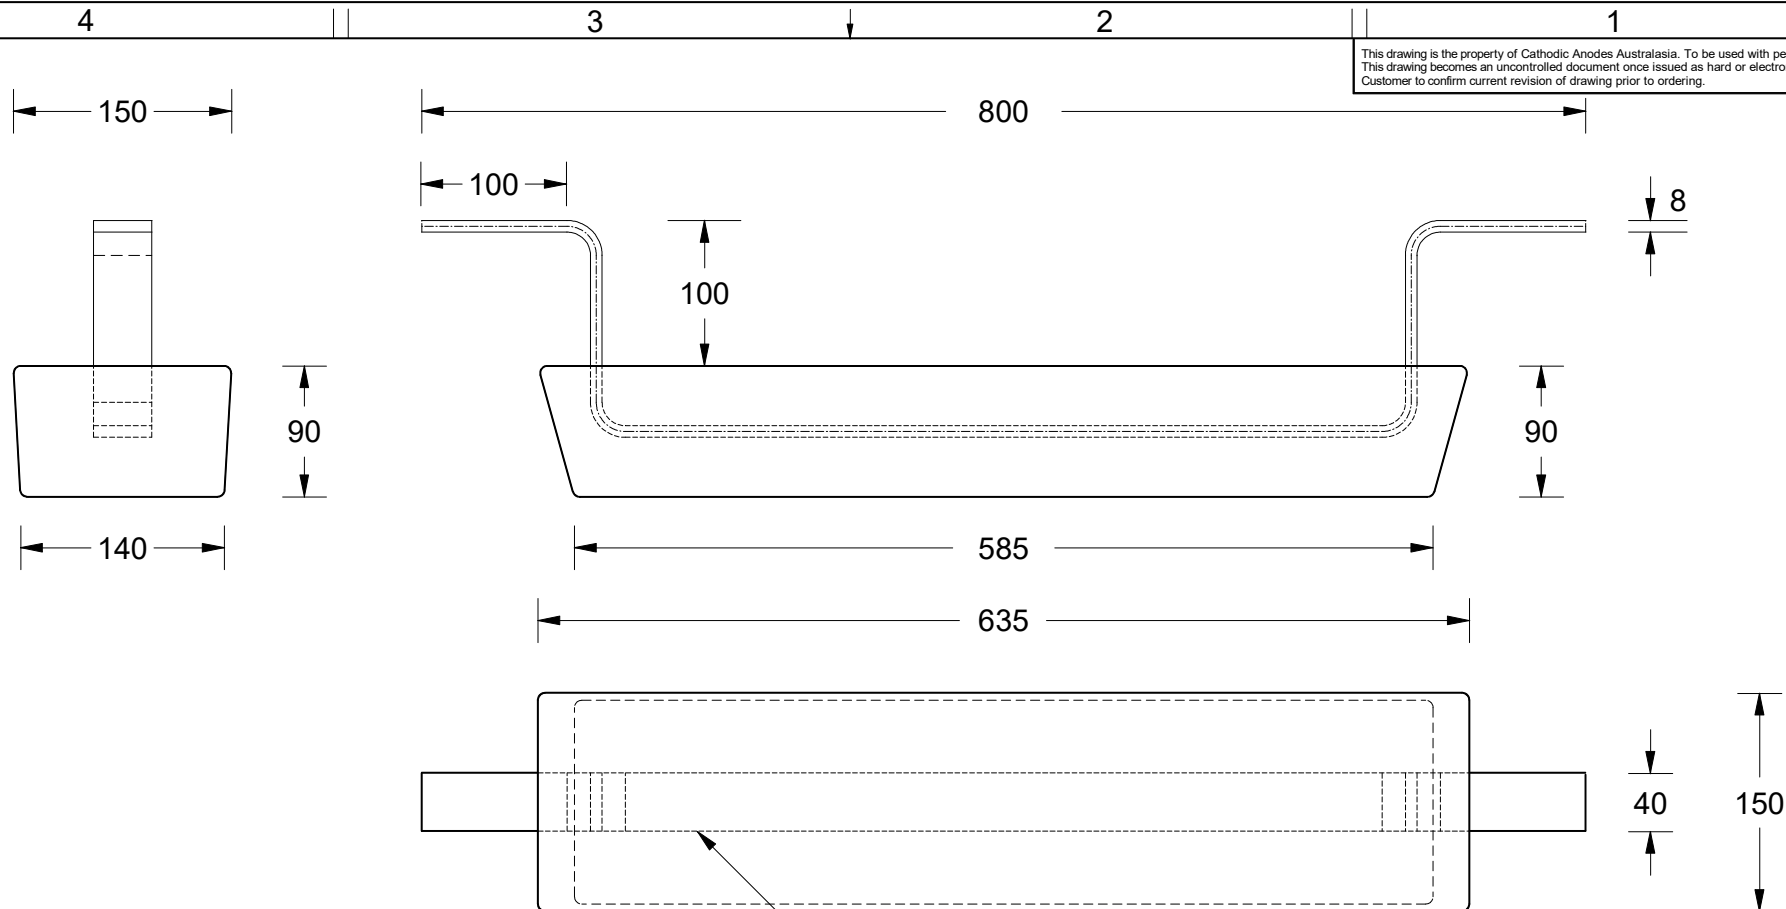

INSERT - 40 x 8 Mild Steel Flat Bar

Chemical Composition Limits		Alloy:
Standard: AS2239 (Most current revision)		A6
Aluminium		
Element	min.	max.
Zinc	2.0	6.0
Indium	0.01	0.02
Cadmium	-	0.005
Silicon	0.08	0.12
Iron	-	0.12
Magnesium	-	0.02
Titanium	-	0.02
Copper	-	0.006
Tin	-	0.02
Other Impurities	-	-
- each	-	0.02
- total	-	0.05
Aluminium	remainder	

Notes

1. Anodes are cast to comply with CAA's standard casting tolerances
2. All sharp edges removed for safe handling
3. Anode insert material to meet relevant Australian/International specifications



All dimensions are in mm (nominal)

Rev	Details of Change(s)	Date	Drawn	Verified
1	For Quotation	05 August 2013	R.N.	J.L.

Nett Weight Kg (nominal)	Gross Weight Kg (nominal)
20.0	22.5



Cathodic Anodes Australasia

cathodicanodes.com.au

Product	
Aluminium Anode	
Part no.	Scale
CDA-20S Type 3	1 : 5
Drawing No: CD3623	Rev Sheet
	1 1 of 1
Drawn by: R Northey	Date: 05 AUG 2013
Mould No: 8	Tooling:

